

June 25, 2024

CITY OF OCEANSIDE

**Libby Lake Lighting and Mini Pitch Court
CIP23-00017**

ADDENDUM NO. 2

The following additions, modifications and changes are hereby made to the Contract Documents and specifications for **Libby Lake Lighting and Mini Pitch Court CIP23-00017**.

This addendum modifies the following:

- Section 1.4.4: Time for Completion
- Section 8.12: Electrical Conduit for Mini Pitch Court Slab (Bid Item No.12)

Section 1.4.4 Time for Completion:

Replace:

All work shall be completed...within 40 working days after the commencement date set forth in the Notice to Proceed *or prior to November 1st, 2024 whichever is sooner.*

With:

All work shall be completed... within 40 working days after the commencement date set forth in the Notice to Proceed. *The project shall be completed in the dry season due to flooding concerns with the lake. In the event the project schedule goes into the rainy season, the project may be required to be put on hold until conditions allow for construction to continue.*

Section 8.12 Electrical Conduit for Mini Pitch Court Slab (Bid Item No.12):

Replace:


All contents within Section 8.12.

With:

This bid item shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the working involved in trenching, backfill, and placement of empty electrical conduit and installation of an electrical pull box for the future mini pitch court lighting.

An electrical pull box shall be installed at the location of the existing lighting fixture as shown below in accordance with Section 701-11.1 of the Greenbook. It shall be noted that the existing lighting will be abandoned/removed at a later date and therefore, the existing lighting conduits that feed the existing pole shall be re-routed to the electrical pull box to allow for future connection to the empty electrical conduits that will be installed. Empty electrical conduits, capable of holding two circuits, shall be installed from the newly installed electrical pull box to the western edge of the slab in accordance with Attachment B and Section 701.12.1 of the Greenbook.

The location of the existing light pole referenced above is shown below:

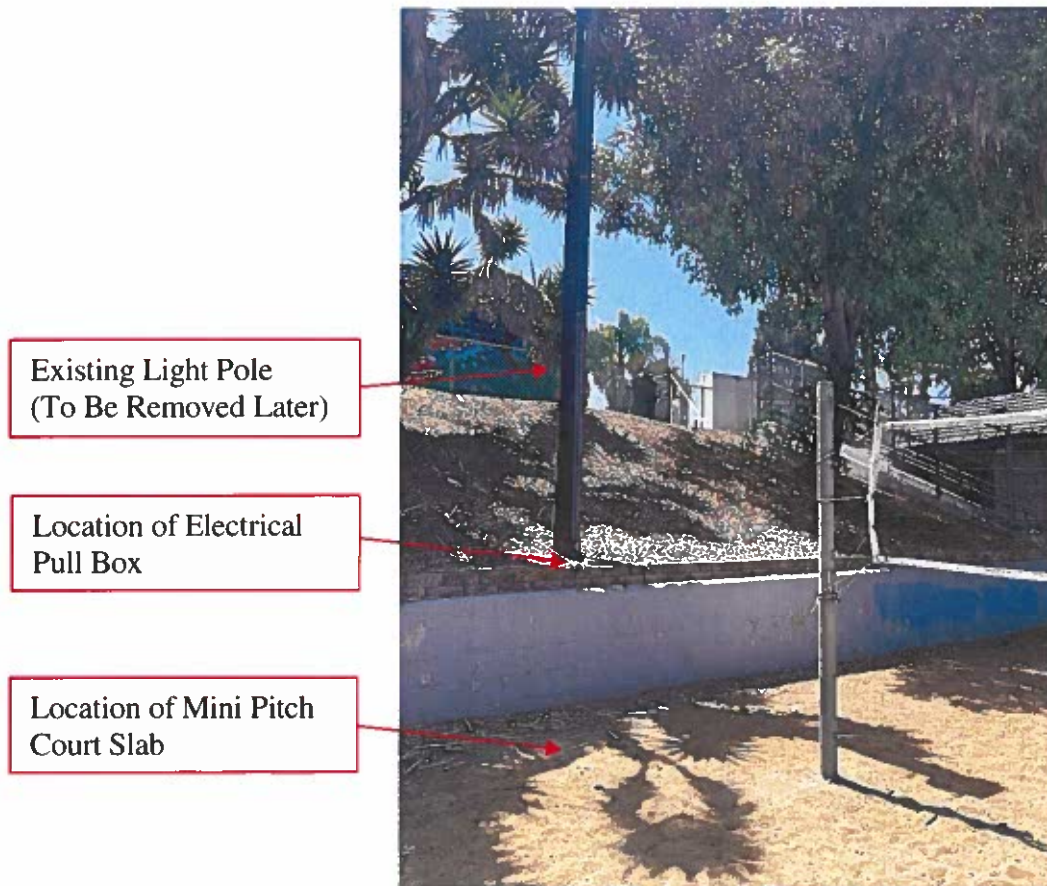

The contractor shall be responsible for procuring and installing tracer wire and marker tape on the conduit.

Payment – Payment for electrical conduit and electrical pull box installation shall be on a lump sum basis in accordance with Section 7.16.5 of the General Provisions and no additional compensation will be allowed therefor.

Enclosed please find a form to be signed acknowledging the receipt of this addendum. This form is to be returned with your Bid Proposal. Failure to sign and submit this form with your Bid Proposal will be cause for rejection of your bid.

CITY OF OCEANSIDE



For: BRIAN K. THOMAS
City Engineer



June 25, 2024

ACKNOWLEDGEMENT OF

ADDENDUM NO. 2

CITY OF OCEANSIDE

**Libby Lake Lighting and Mini Pitch Court
CIP23-00017**

Signing of this form acknowledges that the Contractor has received Addendum No. 2 and that they have read and understand the changes set forth in the Addendum.

This form must be signed by the Contractor's authorized representative and returned with the Bid Documents.

Authorized Representative_____

Name of Contractor_____

Date_____