

City of San Diego

CONTRACTOR'S NAME: _____
ADDRESS: _____
TELEPHONE NO.: _____ FAX NO.: _____
CITY CONTACT: Taylor Cox Contract Specialist, Email: TJCox@sandiego.gov
Phone No. (619) 533-3033
S. McMullen / R. W. Bustamante / L. I. Russell

BIDDING DOCUMENTS



FOR

CITY HEIGHTS POOL RECONSTRUCTION

BID NO.: K-20-1888-DBB-3-A
SAP NO. (WBS/IO/CC): B-19068
CLIENT DEPARTMENT: 1714
COUNCIL DISTRICT: 9
PROJECT TYPE: BE
CDBG NO.: 100000-2020

THIS CONTRACT WILL BE SUBJECT TO THE FOLLOWING:

- FEDERAL EQUAL OPPORTUNITY CONTRACTING REQUIREMENTS.
- PREVAILING WAGE RATES: STATE ☒ FEDERAL ☒
- APPRENTICESHIP
- THIS IS A CDBG FUNDED CONTRACT THROUGH THE DEPARTMENT OF HOUSING AND URBAN DEVELOPMENT

BID DUE DATE:

2:00 PM
JUNE 18, 2020

CITY OF SAN DIEGO'S ELECTRONIC BIDDING SITE, PLANETBIDS

<http://www.sandiego.gov/cip/bidopps/index.shtml>

ENGINEER OF WORK

The engineering Specifications and Special Provisions contained herein have been prepared by or under the direction of the following Registered Engineer and Registered Architect:



1) Registered Architect

05/06/2022

Date

Seal:



ARCHITECT STAMP

PARITA AMMERLAHN
2) For City Engineer

5/6/2020

Date

Seal:

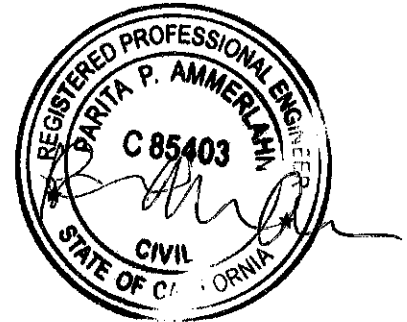


TABLE OF CONTENTS

SECTION	PAGE
1. REQUIRED DOCUMENTS SCHEDULE	5
2. NOTICE INVITING BIDS.....	7
3. INSTRUCTIONS TO BIDDERS.....	10
4. PERFORMANCE AND PAYMENT BONDS	20
5. ATTACHMENTS:	
A. SCOPE OF WORK	23
B. RESERVED	25
C. RESERVED	26
D. COMMUNITY DEVELOPMENT BLOCK GRANT (CDBG) FUNDING AGENCY PROVISIONS:.....	27
1. Notice of Requirement for Affirmative Action to Ensure EEO (Executive Order 11246).....	28
2. Equal Opportunity Clauses	29
3. Standard Federal Equal Employment Specifications	29
4. Violation or Breach of Requirements	35
5. Monthly Employment Utilization Reports	35
6. Records of Payments to DBEs	35
7. Federal Wage Requirements For Federally Funded Projects	35
8. Prevailing Wage Rates.....	36
9. Wage Rates	40
10. Section 3 of the Housing and Urban Development Act of 1968.....	69
11. Federal Labor Standards Provisions.....	70
12. Agency Specific Provisions	78
13. DBE Potential Resources Centers.....	79
14. Good Faith Effort Documentation Submittals.....	81
15. Forms.....	81
Form AA61 List of Work Made Available	84
Form AA62 Summary of Bids Received	85
Form AA63 DBE Good Faith Effort List of Subcontractors Solicited	86
E. SUPPLEMENTARY SPECIAL PROVISIONS	87
TECHNICALS	112
1. Appendix A - Notice of Exemption	287
2. Appendix B - Fire Hydrant Meter Program.....	290
3. Appendix C - Materials Typically Accepted by Certificate of Compliance	304
4. Appendix D - Sample City Invoice with Cash Flow Forecast	306

TABLE OF CONTENTS

SECTION	PAGE
5. Appendix E - Location Map	309
6. Appendix F - Sample of Public Notice	311
F. RESERVED	313
G. CONTRACT AGREEMENT	314
6. CERTIFICATIONS AND FORMS	317

REQUIRED DOCUMENTS SCHEDULE DURING BIDDING AND AWARDING

The Bidder's attention is directed to the City's Municipal Code §22.0807(e), (3)-(5) for important information regarding grounds for debarment for failure to submit required documentation.

The specified Equal Opportunity Contracting Program (EOCP) forms are available for download from the City's web site at:

<http://www.sandiego.gov/eoc/forms/index.shtml>

FEDERAL DOCUMENTS SUBMITTAL REQUIREMENTS

ITEM	DOCUMENT TO BE SUBMITTED	WHEN DUE	FROM
1.	Bid Bond (PDF via PlanetBids)	At Time of Bid	ALL BIDDERS
2.	Contractors Certification of Pending Actions	At Time of Bid	ALL BIDDERS
3.	Mandatory Disclosure of Business Interests	At Time of Bid	ALL BIDDERS
4.	Debarment and Suspension Certification for Prime Contractors	At Time of Bid	ALL BIDDERS
5.	Debarment and Suspension Certification for Subcontractors, Suppliers & Mfgs	At Time of Bid	ALL BIDDERS
6.	Lobby Prohibition, Certification and Disclosure	At Time of Bid	ALL BIDDERS
7.	Instructions for Completion of SF-LLL, Disclosure of Lobbying Activities	At Time of Bid	ALL BIDDERS
8.	Disclosure of Lobbying Activities	At Time of Bid	ALL BIDDERS
9.	Technical Submittal Requirements – Technicals 13 11 00, SUB-SECTION 1.15	At Time of Bid	ALL BIDDERS
10.	Bid Bond (Original)	By 5PM Next Business Day After Bid Opening	5 APPARENT LOW BIDDERS
11.	Federal Good Faith Documentation	Within 4 working days of bid opening	ALL BIDDERS
12.	Form AA61 – List of Work Made Available	Within 4 working days of bid opening with good faith effort documentation	ALL BIDDERS

ITEM	DOCUMENT TO BE SUBMITTED	WHEN DUE	FROM
13.	Form AA62 – Summary of Bids Received	Within 4 working days of bid opening with good faith effort documentation	ALL BIDDERS
14.	Form AA63 – Good Faith Effort List of Subcontractors Solicited	Within 4 working days of bid opening with good faith effort documentation	ALL BIDDERS
15.	If the Contractor is a Joint Venture: <ul style="list-style-type: none"> • Joint Venture Agreement • Joint Venture License 	Within 10 working days of receipt by bidder of contract forms	APPARENT LOW BIDDER
16.	Payment & Performance Bond; Certificates of Insurance & Endorsements; and Signed Contract Agreement Page	Within 10 working days of receipt by bidder of contract forms and NOI	APPARENT LOW BIDDER
17.	Listing of “Other Than First Tier” Subcontractors	Within 10 working days of receipt by bidder of contract forms	APPARENT LOW BIDDER

NOTICE INVITING BIDS

1. **SUMMARY OF WORK:** This is the City of San Diego's (City) solicitation process to acquire Construction services for **City Heights Pool Reconstruction**. For additional information refer to Attachment A.
2. **FULL AND OPEN COMPETITION:** This solicitation is subject to full and open competition and may be bid by Contractors on the City's approved Prequalified Contractors List. For information regarding the Contractors Prequalified list visit the City's web site: <http://www.sandiego.gov>.
3. **ESTIMATED CONSTRUCTION COST:** The City's estimated construction cost for this project is **\$2,970,000**.
4. **BID DUE DATE AND TIME ARE: JUNE 18, 2020 at 2:00 PM**
5. **PREVAILING WAGE RATES APPLY TO THIS CONTRACT:** Refer to Attachment D.
6. **LICENSE REQUIREMENT:** To be eligible for award of this contract, Prime contractor must possess the following licensing classification: **A**
 - 6.1. **ADDITIONAL LICENSE REQUIREMENTS:** Swimming Pool Installation Work shall be performed by a **C-53** license classification. See Technicals.
7. **SUBCONTRACTING PARTICIPATION PERCENTAGES:** Subcontracting participation percentages apply to this contract.
 - 7.1. The City affirms that in any contract entered into pursuant to this advertisement, DBE firms will be afforded full opportunity to submit Bids in response to this invitation.
 - 7.2. This Federally assisted project includes subcontracting participation percentages for DBE participation. DBE goal commitments and Good Faith Efforts (GFE) shall be made prior to bidding. DBE commitments and GFE made after the Bid opening will not be considered for the Award of Contract.
 - 7.3. This project is subject to the federal equal opportunity regulations and the following requirements. The City reserves the right to audit the Contractor's compliance with the federal requirements set forth below.
 - 7.4. Following are federally subcontracting participation percentages for this contract. For the purpose of achieving the subcontractor participation percentage, Additive or Deductive, and Type II Allowance Bid Items will not be included in the calculation.
 - 7.5. **Department of Housing and Urban Development (HUD):**
 1. Small Disadvantaged Business (SDB): 5%
 2. Women-Owned Small Business (WoSB): 5%
 3. HUBZone Small Business (HubZone): 3%
 4. Service Disabled Veteran-owned Small Business (SDVoSB): 3%

7.6. Bid shall be **declared non-responsive** if the Bidder fails any of the following conditions:

1. Submission of GFE documentation, as specified in the Special Provisions.
2. Bidder's submission of Good Faith Effort documentation, saved in searchable portable Document Format (PDF) and stored on Universal Serial Bus (USB) Type-A, Compact Disc (CD) or Digital Video Disc (DVD), demonstrating the Bidder made a good faith effort to outreach to and include DBE Subcontractors shall be submitted within 4 Working Days of the Bid opening.

GFE shall be submitted to:
Public Works Contracts
525 B Street, Suite 750 (7th Floor)
San Diego, California, 92101
Attention: Taylor Cox

8. PRE-BID MEETING:

8.1. Prospective Bidders are **encouraged** to attend the virtual Pre-Bid Meeting. The purpose of the meeting is to discuss the scope of the Project, submittal requirements, the pre-qualification process and any Equal Opportunity Contracting Program requirements and reporting procedures. The virtual Pre-Bid meeting is scheduled as follows:

Date: May 21, 2020
Time: 10:00 AM – 11:00 AM (PDT)
Location: See below

Online Meeting: All prospective bidders, on the date and time of the virtual Pre-Bid Meeting, please click on the link.

Please join my meeting from your computer, tablet or smartphone.

<https://global.gotomeeting.com/join/663336685>

This meeting is locked with a password: CityHeightsPool

You can also dial in using your phone.

(For supported devices, tap a one-touch number below to join instantly.)

United States: +1 (872) 240-3322

-One-touch: <tel:+22403311,663336685>

Access Code: 663-336-685

First GoToMeeting? Try a test session:

<http://link.gotomeeting.com/email-welcome>

9. AWARD PROCESS:

9.1. The Award of this contract is contingent upon the Contractor's compliance with all conditions of Award as stated within these documents and within the Notice of Intent to Award.

- 9.2. Upon acceptance of bids and determination of the apparent low bidder, the City will prepare the contract documents for execution within approximately 21 days of the date of the bid opening. The City will then award the contract upon receipt of properly signed Contract, bonds, and insurance documents.
- 9.3. This contract will be deemed executed and effective only upon the signing of the Contract by the Mayor or his designee and approval as to form by the City Attorney's Office.
- 9.4. The low Bid will be determined by the Base Bid.
- 9.5. Once the low bid has been determined, the City may, at its sole discretion, award the contract for the Base Bid alone.

10. SUBMISSION OF QUESTIONS:

- 10.1. The Director (or Designee) of Public Works Department is the officer responsible for opening, examining, and evaluating the competitive Bids submitted to the City for the acquisition, construction and completion of any public improvement except when otherwise set forth in these documents. Any questions related to this solicitation shall be submitted to:

Public Works Contracts
525 B Street, Suite 750 (7th Floor)
San Diego, California, 92101
Attention: Taylor Cox

OR:

TJCox@sandiego.gov

- 10.2. Questions received less than 14 days prior to the date for opening of Bids may not be considered.
- 10.3. Questions or clarifications deemed by the City to be material shall be answered via issuance of an addendum and posted to the City's online bidding service.
- 10.4. Only questions answered by formal written addenda shall be binding. Oral and other interpretations or clarifications shall be without legal effect. It is the Bidder's responsibility to be informed of any addenda that have been issued and to include all such information in its Bid.

INSTRUCTIONS TO BIDDERS

1. PREQUALIFICATION OF CONTRACTORS:

- 1.1. Contractors submitting a Bid must be pre-qualified for the total amount proposed, including all alternate items, prior to the date of submittal. Bids from contractors who have not been pre-qualified as applicable and Bids that exceed the maximum dollar amount at which contractors are pre-qualified may be deemed **non-responsive** and ineligible for award.
- 1.2. The completed application must be submitted online no later than 2 weeks prior to the bid opening.
- 1.3. **Joint Venture Bidders Cumulative Maximum Bidding Capacity:** For projects with an engineer's estimate of \$30,000,000 or greater, Joint Ventures submitting bids may be deemed responsive and eligible for award if the cumulative maximum bidding capacity of the individual Joint Venture entities is equal to or greater than the total amount proposed.
 - 1.3.1. Each of the entities of the Joint Venture must have been previously prequalified at a minimum of \$15,000,000.
 - 1.3.2. Bids submitted with a total amount proposed of less than \$30,000,000 are not eligible for Cumulative Maximum Bidding Capacity prequalification. To be eligible for award in this scenario, the Joint Venture itself or at least one of the Joint Venture entities must have been prequalified for the total amount proposed.
 - 1.3.3. Bids submitted by Joint Ventures with a total amount proposed of \$30,000,000 or greater on a project with an engineer's estimate of less than \$30,000,000 are not eligible for Cumulative Maximum Bidding Capacity prequalification.
 - 1.3.4. The Joint Venture designated as the Apparent Low Bidder shall provide evidence of its corporate existence and furnish good and approved bonds in the name of the Joint Venture within 14 Calendar Days of receipt by the Bidder of a form of contract for execution.
- 1.4. Complete information and links to the on-line prequalification application are available at:
<http://www.sandiego.gov/cip/bidopps/prequalification>
- 1.5. Due to the City's responsibility to protect the confidentiality of the contractors' information, City staff will not be able to provide information regarding contractors' prequalification status over the telephone. Contractors may access real-time information about their prequalification status via their vendor profile on [PlanetBids™](#).

2. **ELECTRONIC FORMAT RECEIPT AND OPENING OF BIDS:** Bids will be received in electronic format (eBids) EXCLUSIVELY at the City of San Diego's electronic bidding (eBidding) site, at: <http://www.sandiego.gov/cip/bidopps/index.shtml> and are due by the date, and time shown on the cover of this solicitation.

- 2.1. BIDDERS MUST BE PRE-REGISTERED** with the City's bidding system and possess a system-assigned Digital ID in order to submit and electronic bid.
- 2.2.** The City's bidding system will automatically track information submitted to the site including IP addresses, browsers being used and the URLs from which information was submitted. In addition, the City's bidding system will keep a history of every login instance including the time of login, and other information about the user's computer configuration such as the operating system, browser type, version, and more. Because of these security features, Contractors who disable their browsers' cookies will not be able to log in and use the City's bidding system.
- 2.3.** The City's electronic bidding system is responsible for bid tabulations. Upon the bidder's or proposer's entry of their bid, the system will ensure that all required fields are entered. **The system will not accept a bid for which any required information is missing.** This includes all necessary pricing, subcontractor listing(s) and any other essential documentation and supporting materials and forms requested or contained in these solicitation documents.
- 2.4. BIDS REMAIN SEALED UNTIL BID DEADLINE.** eBids are transmitted into the City's bidding system via hypertext transfer protocol secure (https) mechanism using SSL 128-256 bit security certificates issued from Verisign/Thawte which encrypts data being transferred from client to server. Bids submitted prior to the "Bid Due Date and Time" are not available for review by anyone other than the submitter who has until the "Bid Due Date and Time" to change, rescind or retrieve its proposal should it desire to do so.
- 2.5. BIDS MUST BE SUBMITTED BY BID DUE DATE AND TIME.** Once the bid deadline is reached, no further submissions are accepted into the system. Once the Bid Due Date and Time has lapsed, bidders, proposers, the general public, and City staff are able to immediately see the results on line. City staff may then begin reviewing the submissions for responsiveness, EOCP compliance and other issues. The City may require any Bidder to furnish statement of experience, financial responsibility, technical ability, equipment, and references.
- 2.6. RECAPITULATION OF THE WORK.** Bids shall not contain any recapitulation of the Work. Conditional Bids may be rejected as being non-responsive. Alternative proposals will not be considered unless called for.
- 2.7. BIDS MAY BE WITHDRAWN** by the Bidder only up to the bid due date and time.
- 2.7.1. Important Note:** Submission of the electronic bid into the system may not be instantaneous. Due to the speed and capabilities of the user's internet service provider (ISP), bandwidth, computer hardware and other variables, it may take time for the bidder's submission to upload and be received by the City's eBidding system. It is the bidder's sole responsibility to ensure their bids are received on time by the City's eBidding system. The City of San Diego is not responsible for bids that do not arrive by the required date and time.
- 2.8. ACCESSIBILITY AND AMERICANS WITH DISABILITIES ACT (ADA) COMPLIANCE:** To request a copy of this solicitation in an alternative format, contact the Public Works Contract

Specialist listed on the cover of this solicitation at least five (5) working days prior to the Bid/Proposal due date to ensure availability.

3. ELECTRONIC BID SUBMISSIONS CARRY FULL FORCE AND EFFECT

- 3.1.** The bidder, by submitting its electronic bid, acknowledges that doing so carries the same force and full legal effect as a paper submission with a longhand (wet) signature.
- 3.2.** By submitting an electronic bid, the bidder certifies that the bidder has thoroughly examined and understands the entire Contract Documents (which consist of the plans and specifications, drawings, forms, affidavits and the solicitation documents), and that by submitting the eBid as its bid proposal, the bidder acknowledges, agrees to and is bound by the entire Contract Documents, including any addenda issued thereto, and incorporated by reference in the Contract Documents.
- 3.3.** The Bidder, by submitting its electronic bid, agrees to and certifies under penalty of perjury under the laws of the State of California, that the certification, forms and affidavits submitted as part of this bid are true and correct.
- 3.4.** The Bidder agrees to the construction of the project as described in Attachment "A-Scope of Work" for the City of San Diego, in accordance with the requirements set forth herein for the electronically submitted prices. The Bidder guarantees the Contract Price for a period of 120 days from the date of Bid opening. The duration of the Contract Price guarantee shall be extended by the number of days required for the City to obtain all items necessary to fulfill all conditions precedent.

- 4. BIDS ARE PUBLIC RECORDS:** Upon receipt by the City, Bids shall become public records subject to public disclosure. It is the responsibility of the respondent to clearly identify any confidential, proprietary, trade secret or otherwise legally privileged information contained within the Bid. General references to sections of the California Public Records Act (PRA) will not suffice. If the Contractor does not provide applicable case law that clearly establishes that the requested information is exempt from the disclosure requirements of the PRA, the City shall be free to release the information when required in accordance with the PRA, pursuant to any other applicable law, or by order of any court or government agency, and the Contractor will hold the City harmless for release of this information.

5. CONTRACTOR REGISTRATION AND ELECTRONIC REPORTING SYSTEM:

- 5.1.** **Prior** to the Award of the Contract or Task Order, you and your Subcontractors and Suppliers must register with the City's web-based vendor registration and bid management system. For additional information go to:

<http://www.sandiego.gov/purchasing/bids-contracts/vendorreg>
- 5.2.** The City may not award the contract until registration of all subcontractors and suppliers is complete. In the event this requirement is not met within the time frame specified in the Notice of Intent to Award letter, the City reserves the right to rescind the Notice of Award / Intent to Award and to make the award to the next responsive and responsible bidder / proposer.

6. **JOINT VENTURE CONTRACTORS:** Provide a copy of the Joint Venture agreement and the Joint Venture license to the City within 14 Calendar Days after receiving the Contract forms.

7. **INSURANCE REQUIREMENTS:**

- 7.1. All certificates of insurance and endorsements required by the contract are to be provided upon issuance of the City's Notice of Intent to Award letter.
- 7.2. Refer to sections 5-4, "INSURANCE" of the Supplementary Special Provisions (SSP) for the insurance requirements which must be met.

8. **REFERENCE STANDARDS:** Except as otherwise noted or specified, the Work shall be completed in accordance with the following standards:

Title	Edition	Document Number
Standard Specifications for Public Works Construction ("The GREENBOOK") http://www.greenbookspecs.org/	2018	PWPI010119-01
City of San Diego Standard Specifications for Public Works Construction ("The WHITEBOOK")* https://www.sandiego.gov/publicworks/edocref/greenbook	2018	PWPI010119 -02
City of San Diego Standard Drawings* https://www.sandiego.gov/publicworks/edocref/standarddraw	2018	PWPI010119 -03
Citywide Computer Aided Design and Drafting (CADD) Standards https://www.sandiego.gov/publicworks/edocref/drawings	2018	PWPI010119 -04
California Department of Transportation (CALTRANS) Standard Specifications – http://www.dot.ca.gov/des/oe/construction-contract-standards.html	2018	PWPI030119-05
CALTRANS Standard Plans http://www.dot.ca.gov/des/oe/construction-contract-standards.html	2018	PWPI030119-06
California Manual on Uniform Traffic Control Devices Revision 4 (CA MUTCD Rev 4) http://www.dot.ca.gov/trafficops/camutcd/	2014	PWPI030119-08
<p>NOTE: *Available online under Engineering Documents and References at: http://www.sandiego.gov/publicworks/edocref/index.shtml</p> <p>*Electronic updates to the Standard Drawings may also be found in the link above</p>		

9. **CITY'S RESPONSES AND ADDENDA:** The City, at its discretion, may respond to any or all questions submitted in writing via the City's eBidding web site in the **form of an addendum**. No other responses to questions, oral or written shall be of any force or effect with respect to this solicitation. The changes to the Contract Documents through addenda are made effective as though originally issued with the Bid. The Bidders shall acknowledge the receipt of Addenda at the time of bid submission.
10. **CITY'S RIGHTS RESERVED:** The City reserves the right to cancel the Notice Inviting Bids at any time, and further reserves the right to reject submitted Bids, without giving any reason for such action, at its sole discretion and without liability. Costs incurred by the Bidder(s) as a result of

preparing Bids under the Notice Inviting Bids shall be the sole responsibility of each bidder. The Notice Inviting Bids creates or imposes no obligation upon the City to enter a contract.

- 11. CONTRACT PRICING:** This solicitation is for a Lump Sum contract with Unit Price provisions as set forth herein. The Bidder agrees to perform construction services for the City of San Diego in accordance with these contract documents for the prices listed below. The Bidder further agrees to guarantee the Contract Price for a period of 120 days from the date of Bid opening. The duration of the Contract Price guarantee may be extended, by mutual consent of the parties, by the number of days required for the City to obtain all items necessary to fulfill all contractual conditions.

12. SUBCONTRACTOR INFORMATION:

- 12.1. LISTING OF SUBCONTRACTORS.** In accordance with the requirements provided in the "Subletting and Subcontracting Fair Practices Act" of the California Public Contract Code, the Bidder shall provide the **NAME** and **ADDRESS** of each Subcontractor who will perform work, labor, render services or who specially fabricates and installs a portion [type] of the work or improvement, in an amount in excess of 0.5% of the Contractor's total Bid. The Bidder shall also state within the description, whether the subcontractor is a **CONSTRUCTOR, CONSULTANT** or **SUPPLIER**. The Bidder shall state the **DIR REGISTRATION NUMBER** for all subcontractors and shall further state within the description, the **PORTION** of the work which will be performed by each subcontractor under this Contract. The Contractor shall list only one Subcontractor for each portion of the Work. The **DOLLAR VALUE** of the total Bid to be performed shall be stated for all subcontractors listed. Failure to comply with this requirement may result in the Bid being rejected as **non-responsive** and ineligible for award. The Bidder's attention is directed to the Special Provisions – Section 3-2, "SELF- PERFORMANCE", which stipulates the percent of the Work to be performed with the Bidders' own forces. The Bidder shall list all SLBE, ELBE, DBE, DVBE, MBE, WBE, OBE, SDB, WoSB, HUBZone, and SDVOSB Subcontractors for which Bidders are seeking recognition towards achieving any mandatory, voluntary (or both) subcontracting participation goals.

Additionally, pursuant to California Senate Bill 96 and in accordance with the requirements of Labor Code sections 1771.1 and 1725.5, by submitting a bid or proposal to the City, Contractor is certifying that he or she has verified that all subcontractors used on this public work project are registered with the California Department of Industrial Relations (DIR). **The Bidder shall provide the name, address, license number, DIR registration number of any Subcontractor – regardless of tier** - who will perform work, labor, render services or specially fabricate and install a portion [type] of the work or improvement pursuant to the contract.

- 12.2. LISTING OF SUPPLIERS.** Any Bidder seeking the recognition of Suppliers of equipment, materials, or supplies obtained from third party Suppliers towards achieving any mandatory or voluntary (or both) subcontracting participation goals shall provide, at a minimum, the **NAME, LOCATION (CITY), DIR REGISTRATION NUMBER** and the **DOLLAR VALUE** of each supplier. The Bidder will be credited up to 60% of the amount to be paid to the Suppliers for materials and supplies unless vendor manufactures or substantially alters materials and supplies, in which case, 100% will be credited. The Bidder is to indicate within the description whether the listed firm is a supplier or manufacturer. If no indication is

provided, the listed firm will be credited at 60% of the listed dollar value for purposes of calculating the Subcontractor Participation Percentage.

- 12.3. LISTING OF SUBCONTRACTORS OR SUPPLIERS FOR ALTERNATES.** For subcontractors or suppliers to be used on additive or deductive alternate items, in addition to the above requirements, bidder shall further note "ALTERNATE" and alternate item number within the description.
- 13. SUBMITTAL OF "OR EQUAL" ITEMS:** See Section 4-6, "TRADE NAMES" in The WHITEBOOK and as amended in the SSP.
- 14. AWARD:**
- 14.1.** The Award of this contract is contingent upon the Contractor's compliance with all conditions precedent to Award.
- 14.2.** Upon acceptance of a Bid, the City will prepare contract documents for execution within approximately 21 days of the date of the Bid opening and award the Contract approximately within 7 days of receipt of properly executed Contract, bonds, and insurance documents.
- 14.3.** This contract will be deemed executed and effective only upon the signing of the Contract by the Mayor or his designee and approval as to form the City Attorney's Office.
- 15. SUBCONTRACT LIMITATIONS:** The Bidder's attention is directed to Standard Specifications for Public Works Construction, Section 3-2, "SELF-PERFORMANCE" in The GREENBOOK and as amended in the SSP which requires the Contractor to self-perform not less than the specified amount. Failure to comply with this requirement shall render the bid **non-responsive** and ineligible for award.
- 16. AVAILABILITY OF PLANS AND SPECIFICATIONS:** Contract Documents may be obtained by visiting the City's website: <http://www.sandiego.gov/cip/>. Plans and Specifications for this contract are also available for review in the office of the City Clerk or Public Works Contracts.
- 17. ONLY ONE BID PER CONTRACTOR SHALL BE ACCEPTED:** No person, firm, or corporation shall be allowed to make, file, or be interested in more than one (1) Bid for the same work unless alternate Bids are called for. A person, firm or corporation who has submitted a sub-proposal to a Bidder, or who has quoted prices on materials to a Bidder, is not hereby disqualified from submitting a sub-proposal or quoting prices to other Bidders or from submitting a Bid in its own behalf. Any Bidder who submits more than one bid will result in the rejection of all bids submitted.
- 18. SAN DIEGO BUSINESS TAX CERTIFICATE:** The Contractor and Subcontractors, not already having a City of San Diego Business Tax Certificate for the work contemplated shall secure the appropriate certificate from the City Treasurer, Civic Center Plaza, First floor and submit to the Contract Specialist upon request or as specified in the Contract Documents. Tax Identification numbers for both the Bidder and the listed Subcontractors must be submitted on the City provided forms within these documents.

19. BIDDER'S GUARANTEE OF GOOD FAITH (BID SECURITY) FOR DESIGN-BID-BUILD CONTRACTS:

- 19.1.** For bids \$250,000 and above, bidders shall submit Bid Security at bid time. Bid Security shall be in one of the following forms: a cashier's check, or a properly certified check upon some responsible bank; or an approved corporate surety bond payable to the City of San Diego for an amount of not less than 10% of the total bid amount.
- 19.2.** This check or bond, and the monies represented thereby, will be held by the City as a guarantee that the Bidder, if awarded the contract, will in good faith enter into the contract and furnish the required final performance and payment bonds.
- 19.3.** The Bidder agrees that in the event of the Bidder's failure to execute this contract and provide the required final bonds, the money represented by the cashier's or certified check will remain the property of the City; and the Surety agrees that it will pay to the City the damages, not exceeding the sum of 10% of the amount of the Bid, that the City may suffer as a result of such failure.
- 19.4.** At the time of bid submission, bidders must upload and submit an electronic PDF copy of the aforementioned bid security. Whether in the form of a cashier's check, a properly certified check or an approved corporate surety bond payable to the City of San Diego, the bid security must be uploaded to the City's eBidding system. By 5PM the next business day after the bid opening date, the first five apparent low bidders must provide the City with the original bid security.
- 19.5.** Failure to submit the electronic version of the bid security at the time of bid submission AND failure to provide the original by 5PM the next business day after bid opening date shall cause the bid to be rejected and deemed **non-responsive**.

Original Bid Bond shall be submitted to:

Public Works Contracts
525 B Street, Suite 750 (7th Floor)
San Diego, California, 92101

To the Attention of the Contract Specialist on the Front Page of this solicitation.

20. AWARD OF CONTRACT OR REJECTION OF BIDS:

- 20.1.** This contract may be awarded to the lowest responsible and reliable Bidder.
- 20.2.** Bidders shall complete ALL eBid forms as required by this solicitation. Incomplete eBids will not be accepted.
- 20.3.** The City reserves the right to reject any or all Bids, to waive any informality or technicality in Bids received, and to waive any requirements of these specifications as to bidding procedure.

- 20.4.** Bidders will not be released on account of their errors of judgment. Bidders may be released only upon receipt by the City within 3 Working Days of the bid opening, written notice from the Bidder which shows proof of honest, credible, clerical error of a material nature, free from fraud or fraudulent intent; and of evidence that reasonable care was observed in the preparation of the Bid.
- 20.5.** A bidder who is not selected for contract award may protest the award of a contract to another bidder by submitting a written protest in accordance with the San Diego Municipal Code.
- 20.6.** The City of San Diego will not discriminate in the award of contracts with regard to race, religion creed, color, national origin, ancestry, physical handicap, marital status, sex or age.
- 20.7.** Each Bid package properly signed as required by these specifications shall constitute a firm offer which may be accepted by the City within the time specified herein.
- 20.8.** The City reserves the right to evaluate all Bids and determine the lowest Bidder on the basis of the base bid and any proposed alternates or options as detailed herein.

21. BID RESULTS:

- 21.1.** The availability of the bids on the City's eBidding system shall constitute the public announcement of the apparent low bidder. In the event that the apparent low bidder is subsequently deemed non-responsive or non-responsible, a notation of such will be made on the eBidding system. The new ranking and apparent low bidder will be adjusted accordingly.
- 21.2.** To obtain the bid results, view the results on the City's web site, or request the results by U.S. mail and provide a self-addressed, stamped envelope. If requesting by mail, be sure to reference the bid name and number. The bid tabulations will be mailed to you upon their completion. The results will not be given over the telephone.

22. THE CONTRACT:

- 22.1.** The Bidder to whom award is made shall execute a written contract with the City of San Diego and furnish good and approved bonds and insurance certificates specified by the City within 14 days after receipt by Bidder of a form of contract for execution unless an extension of time is granted to the Bidder in writing.
- 22.2.** If the Bidder takes longer than 14 days to fulfill these requirements, then the additional time taken shall be added to the Bid guarantee. The Contract shall be made in the form adopted by the City, which includes the provision that no claim or suit whatsoever shall be made or brought by Contractor against any officer, agent, or employee of the City for or on account of anything done or omitted to be done in connection with this contract, nor shall any such officer, agent, or employee be liable hereunder.
- 22.3.** If the Bidder to whom the award is made fails to enter into the contract as herein provided, the award may be annulled and the Bidder's Guarantee of Good Faith will be subject to forfeiture. An award may be made to the next lowest responsible and reliable Bidder who shall fulfill every stipulation embraced herein as if it were the party to whom the first award was made.

- 22.4.** Pursuant to the San Diego City Charter section 94, the City may only award a public works contract to the lowest responsible and reliable Bidder. The City will require the Apparent Low Bidder to (i) submit information to determine the Bidder's responsibility and reliability, (ii) execute the Contract in form provided by the City, and (iii) furnish good and approved bonds and insurance certificates specified by the City within 14 Days, unless otherwise approved by the City, in writing after the Bidder receives notification from the City, designating the Bidder as the Apparent Low Bidder and formally requesting the above mentioned items.
- 22.5.** The award of the Contract is contingent upon the satisfactory completion of the above-mentioned items and becomes effective upon the signing of the Contract by the Mayor or designee and approval as to form by the City Attorney's Office. If the Apparent Low Bidder does not execute the Contract or submit required documents and information, the City may award the Contract to the next lowest responsible and reliable Bidder who shall fulfill every condition precedent to award. A corporation designated as the Apparent Low Bidder shall furnish evidence of its corporate existence and evidence that the officer signing the Contract and bond for the corporation is duly authorized to do so.
- 23. EXAMINATION OF PLANS, SPECIFICATIONS, AND SITE OF WORK:** The Bidder shall examine carefully the Project Site, the Plans and Specifications, other materials as described in the Special Provisions, Section 3-9, "TECHNICAL STUDIES AND SUBSURFACE DATA", and the proposal forms (e.g., Bidding Documents). The submission of a Bid shall be conclusive evidence that the Bidder has investigated and is satisfied as to the conditions to be encountered, as to the character, quality, and scope of Work, the quantities of materials to be furnished, and as to the requirements of the Bidding Documents Proposal, Plans, and Specifications.
- 24. CITY STANDARD PROVISIONS:** This contract is subject to the following standard provisions. See The WHITEBOOK for details.
- 24.1.** The City of San Diego Resolution No. R-277952 adopted on May 20, 1991 for a Drug-Free Workplace.
- 24.2.** The City of San Diego Resolution No. R-282153 adopted on June 14, 1993 related to the Americans with Disabilities Act.
- 24.3.** The City of San Diego Municipal Code §22.3004 for Contractor Standards.
- 24.4.** The City of San Diego's Labor Compliance Program and the State of California Labor Code §§1771.5(b) and 1776.
- 24.5.** Sections 1777.5, 1777.6, and 1777.7 of the State of California Labor Code concerning the employment of apprentices by contractors and subcontractors performing public works contracts.
- 24.6.** The City's Equal Benefits Ordinance (EBO), Chapter 2, Article 2, Division 43 of The San Diego Municipal Code (SDMC).
- 24.7.** The City's Information Security Policy (ISP) as defined in the City's Administrative Regulation 90.63.

25. PRE-AWARD ACTIVITIES:

- 25.1.** The contractor selected by the City to execute a contract for this Work shall submit the required documentation as specified in the herein and in the Notice of Award. Failure to provide the information as specified may result in the Bid being rejected as **non-responsive**.
- 25.2.** The decision that bid is non-responsive for failure to provide the information required within the time specified shall be at the sole discretion of the City.

PERFORMANCE BOND, LABOR AND MATERIALMEN'S BOND

FAITHFUL PERFORMANCE BOND AND LABOR AND MATERIALMEN'S BOND:

_____, a corporation, as principal, and
_____, a corporation authorized to do business
in the State of California, as Surety, hereby obligate themselves, their successors and assigns, jointly and
severally, to The City of San Diego a municipal corporation in the sum of _____, for the
faithful performance of the annexed contract, and in the sum of _____ for the benefit
of laborers and materialmen designated below.

Conditions:

If the Principal shall faithfully perform the annexed contract with the City of San Diego, California,
then the obligation herein with respect to a faithful performance shall be void; otherwise it shall remain in
full force.

If the Principal shall promptly pay all persons, firms and corporations furnishing materials for or
performing labor in the execution of this contract, and shall pay all amounts due under the California
Unemployment Insurance Act then the obligation herein with respect to laborers and materialmen shall be
void; otherwise it shall remain in full force.

The obligation herein with respect to laborers and materialmen shall inure to the benefit of all
persons, firms and corporations entitled to file claims under the provisions of Article 2. Claimants, (iii) public
works of improvement commencing with Civil Code Section 9100 of the Civil Code of the State of California.

Changes in the terms of the annexed contract or specifications accompanying same or referred to
therein shall not affect the Surety's obligation on this bond, and the Surety hereby waives notice of same.

The Surety shall pay reasonable attorney's fees should suit be brought to enforce the provisions of
this bond.

The Surety expressly agrees that the City of San Diego may reject any contractor or subcontractor
which may be proposed by Surety in fulfillment of its obligations in the event of default by the Principal.

The Surety shall not utilize Principal in completing the improvements and work specified in the
Agreement, nor shall Surety accept a bid from Principal for completion of the improvements and work
specified in the Agreement if the City of San Diego, when declaring the Principal in default, notifies Surety
of the City of San Diego 's objection to Principal's further participation in the completion of the
improvements and work specified in the Agreement.

PERFORMANCE BOND, LABOR AND MATERIALMEN'S BOND (continued)

Dated _____

Approved as to Form

Principal

By _____

Printed Name of Person Signing for Principal

Mara W. Elliott, City Attorney

By _____
Deputy City Attorney

Surety

By _____
Attorney-in-fact

Approved:

Local Address of Surety

By _____
Mayor or Designee

Local Address (City, State) of Surety

Local Telephone No. of Surety

Premium \$ _____

Bond No. _____

ATTACHMENTS

ATTACHMENT A
SCOPE OF WORK

SCOPE OF WORK

1. **SCOPE OF WORK:** This project shall include but not be limited to the demolition of the existing pool and reconstruction of the pool, installation of decking, children's pool deck drainage, slides, shade sails, groundwater pump station, sewer main, and fencing.
 - 1.1. The Work shall be performed in accordance with:
 - 1.1.1. The Notice Inviting Bids and Plans numbered **41287-01-D** through **41287-41-D**, inclusive.
2. **LOCATION OF WORK:** The location of the Work is as follows:

See **Appendix E – Location Map**.
3. **CONTRACT TIME:** The Contract Time for completion of the Work shall be **150 Working Days**.

ATTACHMENT B

RESERVED

ATTACHMENT C

RESERVED

ATTACHMENT D

COMMUNITY DEVELOPMENT BLOCK GRANT (CDBG)

HOUSING AND URBAN DEVELOPMENT (HUD)

FUNDING AGENCY PROVISIONS

IN THE EVENT THAT THESE REQUIREMENTS CONFLICT WITH THE CITY'S GENERAL EOC REQUIREMENTS, THE FUNDING AGENCY'S REQUIREMENTS WILL CONTROL.

1. NOTICE OF REQUIREMENT FOR AFFIRMATIVE ACTION TO ENSURE EQUAL EMPLOYMENT OPPORTUNITY (EXECUTIVE ORDER 11246).

- 1.1.** The goal and timetables for minority and female participation, expressed in percentage terms for the Contractor's aggregate workforce in each trade on all construction work in the covered area, as follows:

	<u>Goal</u>
1. Minority Participation:	16.9%
2. Female Participation:	6.9%

- 1.2.** These goals are applicable to all the Contractor's construction work (whether or not it is Federal or federally assisted) performed in the covered area. If the Contractor performs Work in a geographical area located outside of the covered area, it shall apply the goals established for such geographical area where the Work is actually performed. With regard to this second area, the Contractor also is subject to the goals for both federally involved and non-federally involved Work.
- 1.3.** The Contractor's compliance with the Executive Order and the regulations in 41 CFR Part 60-4 shall be based on its implementation of the Equal Opportunity Clause, specific affirmative action obligations required by the specifications set forth in 41 CFR 60-4.3(a), and its efforts to meet the goals.
- 1.4.** The hours of minority and female employment and training shall be substantially uniform throughout the length of the Contract, and in each trade, and the Contractor shall make a good faith effort to employ minorities and women evenly on each of its projects. The transfer of minority or female employees or trainees from Contractor to Contractor or from project to project for the sole purpose of meeting the Contractor's goals shall be a violation of the Contract, the Executive Order, and the regulations in 41 CFR Part 60-4. Compliance with the goals will be measured against the total work hours performed.
- 1.5.** The Contractor shall provide written notification to the Director the Office of Federal Contract Compliance Programs within 10 Working Days of award of any Subcontract in excess of \$10,000 at any tier for Work under the Contract resulting from this solicitation. The notification shall list the name, address and telephone number of the Subcontractor; employer identification number of the Subcontractor; estimated dollar amount of the Subcontract; estimated starting and completion dates of the Subcontract; and the geographical area in which the subcontract is to be performed. The "covered area" is the City of San Diego.

2. EQUAL OPPORTUNITY CLAUSES:

2.1. The following equal opportunity clauses are incorporated by reference herein:

1. The equal opportunity clause located 41 CFR 60.1.4(a), which specifies the obligations imposed under Executive Order 11246.
2. The equal opportunity clause located at 41 CFR 60-741.5, which contains the obligations imposed by Section 503 of the Rehabilitation Act of 1973.
3. The "Equal Opportunity Clause" (Resolution No. 765092) filed on December 4, 1978, in the Office of the City Clerk, San Diego, California and incorporated in the "Standard Federal Employment Opportunity Construction Contract Specifications (Executive Order 11246 - Document No. 769023, filed September 11, 1984, in the Office of the City Clerk, San Diego, California) is applicable to all non-exempt City construction contracts and subcontracts of \$2,000 or more.
4. Age Discrimination Act of 1975, Pub. L. 94-135.
5. Title VI of the Civil Rights Act of 1964, Pub. L. 88-352.
6. Section 13 of the Federal Water Pollution Control Acts Amendments of 1972, Pub. L. 92-5200 (the Clean Water Act).
7. Section 504 of the Rehabilitation Act of 1973, Pub. L. 93-112 (Executive Orders 11914 and 11250).
8. Women's Minority Business Enterprises, Executive Orders 11625, 12138 and 12432.
9. Section 129 of the Small Business Administration Reauthorization and Amendment Act of 1988, Pub. L. 100-590.

3. STANDARD FEDERAL EQUAL EMPLOYMENT SPECIFICATIONS:

3.1. The Contractor is required to comply with the 15 "Standard Federal Equal Employment Specifications" in section 3.2 below and also located in 41 CFR 60-4.3 for federal and federally-assisted construction contracts in excess of \$10,000.

3.2. Standard Federal Equal Employment Specifications.

1. As used in these specifications:
 - a) Covered area" means the geographical area described in the solicitation from which this contract resulted;
 - b) "Director" means Director, Office of Federal Contract Compliance Programs, United States Department of Labor, or any person to whom the Director delegates authority;

- c) "Employer identification number" means the Federal Social Security number used on the Employer's Quarterly Federal Tax Return, U.S. Treasury Department Form 941.
 - d) Minority" includes:
 - i. Black (all persons having origins in any of the Black African racial groups not of Hispanic origin);
 - ii. Hispanic (all persons of Mexican, Puerto Rican, Cuban, Central or South American or other Spanish Culture or origin, regardless of race);
 - iii. Asian and Pacific Islander (all persons having origins in any of the original peoples of the Far East, Southeast Asia, the Indian Subcontinent, or the Pacific Islands); and
 - iv. American Indian or Alaskan Native (all persons having origins in any of the original peoples of North America and maintaining identifiable tribal affiliations through membership and participation or community identification).
2. Whenever the Contractor, or any Subcontractor at any tier, subcontracts a portion of the work involving any construction trade, it shall physically include in each subcontract in excess of \$10,000 the provisions of these specifications and the Notice which contains the applicable goals for minority and female participation and which is set forth in the solicitations from which this contract resulted.
3. If the Contractor is participating (pursuant to 41.CFR 60-4.5 in a Hometown Plan approved by the U.S. Department of Labor in the covered area either individually or through an association, its affirmative action obligations on all work in the Plan area (including goals and timetables) shall be in accordance with that Plan for those trades which have unions participating in the Plan. Contractors must be able to demonstrate their participation in and compliance with the provisions of any such Hometown Plan. Each Contractor or Subcontractor participating in an approved Plan is individually required to comply with its obligations under the EEO clause, and to make a good faith effort to achieve each goal under the Plan in each trade in which it has employees. The overall good faith performance by other Contractors or Subcontractors toward a goal in an approved Plan does not excuse any covered Contractor's or Subcontractor's failure to take good faith efforts to achieve the Plan goals and timetables.
4. The Contractor shall implement the specific affirmative action standards provided in item 7, paragraphs "a" through "p", of this section below. The goals set forth in the solicitation from which this contract resulted are expressed as percentages of the total hours of employment and training of minority and female utilization the Contractor should reasonably be able to achieve in each construction trade in which it has employees in the covered area. Covered Construction contractors performing construction work in geographical areas where they do not have a Federal or federally assisted construction contract shall apply the minority and female goals established for the geographical area where the work is being performed. Goals are published periodically in the Federal Register in notice form, and such notices may be obtained from any Office of Federal Contract Compliance

Programs office or from Federal procurement contracting officers. The Contractor is expected to make substantially uniform progress in meeting its goals in each craft during the period specified.

5. Neither the provisions of any collective bargaining agreement, nor the failure by a union with whom the Contractor has a collective bargaining agreement, to refer either minorities or women shall excuse the Contractor's obligations under these specifications, Executive Order 11246, or the regulations promulgated pursuant thereto.
6. In order for the nonworking training hours of apprentices and trainees to be counted in meeting the goals, such apprentices and trainees must be employed by the Contractor during the training period, and the Contractor must have made a commitment to employ the apprentices and trainees at the completion of their training, subject to the availability of employment opportunities. Trainees must be trained pursuant to training programs approved by the U.S. Department of Labor.
7. The Contractor shall take specific affirmative actions to ensure equal employment opportunity. The evaluation of the Contractor's compliance with these specifications shall be based upon its effort to achieve maximum results from its actions. The Contractor shall document these efforts fully, and shall implement affirmative action steps at least as extensive as the following:
 - a) Ensure and maintain a working environment free of harassment, intimidation, and coercion at all sites, and in all facilities at which the Contractor's employees are assigned to work. The Contractor, where possible, will assign two or more women to each construction project. The Contractor shall specifically ensure that all foremen, superintendents, and other on-site supervisory personnel are aware of and carry out the Contractor's obligation to maintain such a working environment, with specific attention to minority or female individuals working at such sites or in such facilities
 - b) Establish and maintain a current list of minority and female recruitment sources, provide written notification to minority and female recruitment sources and to community organizations when the Contractor or its unions have employment opportunities available, and maintain a record of the organizations' responses.
 - c) Maintain a current file of the names, addresses and telephone numbers of each minority and female off-the-street applicant and minority or female referral from a union, a recruitment source or community organization and of what action was taken with respect to each such individual. If such individual was sent to the union hiring hall for referral and was not referred back to the Contractor by the union or, if referred, not employed by the Contractor, this shall be documented in the file with the reason therefor, along with whatever additional actions the Contractor may have taken.
 - d) Provide immediate written notification to the Director when the union or unions with which the Contractor has a collective bargaining agreement has not referred to the Contractor a minority person or woman sent by the Contractor, or when the Contractor has other information that the union

referral process has impeded the Contractor's efforts to meet its obligations.

- e) Develop on-the-job training opportunities and/or participate in training programs for the area which expressly include minorities and women, including upgrading programs and apprenticeship and trainee programs relevant to the Contractor's employment needs, especially those programs funded or approved by the Department of Labor. The Contractor shall provide notice of these programs to the sources compiled under 7b above.
- f) Disseminate the Contractor's EEO policy by providing notice of the policy to unions and training programs and requesting their cooperation in assisting the Contractor in meeting its EEO obligations; by including it in any policy manual and collective bargaining agreement; by publicizing it in the company newspaper, annual report, etc.; by specific review of the policy with all management personnel and with all minority and female employees at least once a year; and by posting the company EEO policy on bulletin boards accessible to all employees at each location where construction work is performed.
- g) Review, at least annually, the company's EEO policy and affirmative action obligations under these specifications with all employees having any responsibility for hiring, assignment, layoff, termination or other employment decisions including specific review of these items with onsite supervisory personnel such as Superintendents, General Foremen, etc., prior to the initiation of construction work at any job site. A written record shall be made and maintained identifying the time and place of these meetings, persons attending, subject matter discussed, and disposition of the subject matter.
- h) Disseminate the Contractor's EEO policy externally by including it in any advertising in the news media, specifically including minority and female news media, and providing written notification to and discussing the Contractor's EEO policy with other Contractors and Subcontractors with whom the Contractor does or anticipates doing business.
- i) Direct its recruitment efforts, both oral and written, to minority, female and community organizations, to schools with minority and female students and to minority and female recruitment and training organizations serving the Contractor's recruitment area and employment needs. Not later than one month prior to the date for the acceptance of applications for apprenticeship or other training by any recruitment source, the Contractor shall send written notification to organizations such as the above, describing the openings, screening procedures, and tests to be used in the selection process.
- j) Encourage present minority and female employees to recruit other minority persons and women and, where reasonable, provide after school, summer and vacation employment to minority and female youth both on the site and in other areas of a Contractor's work force.

- k) Validate all tests and other selection requirements where there is an obligation to do so under 41 CFR part 60-3.
 - l) Conduct, at least annually, an inventory and evaluation at least of all minority and female personnel for promotional opportunities and encourage these employees to seek or to prepare for, through appropriate training, etc., such opportunities.
 - m) Ensure that seniority practices, job classifications, work assignments and other personnel practices, do not have a discriminatory effect by continually monitoring all personnel and employment related activities to ensure that the EEO policy and the Contractor's obligations under these specifications are being carried out.
 - n) Ensure that all facilities and company activities are nonsegregated except that separate or single-user toilet and necessary changing facilities shall be provided to assure privacy between the sexes.
 - o) Document and maintain a record of all solicitations of offers for subcontracts from minority and female construction contractors and suppliers, including circulation of solicitations to minority and female contractor associations and other business associations.
 - p) Conduct a review, at least annually, of all supervisors' adherence to and performance under the Contractor's EEO policies and affirmative action obligations.
8. Contractors are encouraged to participate in voluntary associations which assist in fulfilling one or more of their affirmative action obligations (item 7, paragraphs "a" through "p", of this section). The efforts of a contractor association, joint contractor-union, contractor-community, or other similar group of which the contractor is a member and participant, may be asserted as fulfilling any one or more of its obligations under item 7, paragraphs "a" through "p", of this section that the contractor actively participates in the group, makes every effort to assure that the group has a positive impact on the employment of minorities and women in the industry, ensures that the concrete benefits of the program are reflected in the Contractor's minority and female workforce participation, makes a good faith effort to meet its individual goals and timetables, and can provide access to documentation which demonstrates the effectiveness of actions taken on behalf of the Contractor. The obligation to comply, however, is the Contractor's and failure of such a group to fulfill an obligation shall not be a defense for the Contractor's noncompliance.
9. A single goal for minorities and a separate single goal for women have been established. The Contractor, however, is required to provide equal employment opportunity and to take affirmative action for all minority groups, both male and female, and all women, both minority and non-minority. Consequently, the Contractor may be in violation of the Executive Order if a particular group is employed in a substantially disparate manner (for example, even though the Contractor has achieved its goals for women generally, the Contractor may be in violation of the Executive Order if a specific minority group of women is underutilized).

10. The Contractor shall not use the goals and timetables or affirmative action standards to discriminate against any person because of race, color, religion, sex, sexual orientation, gender identity, or national origin.
 11. The Contractor shall not enter into any Subcontract with any person or firm debarred from Government contracts pursuant to Executive Order 11246.
 12. The Contractor shall carry out such sanctions and penalties for violation of these specifications and of the Equal Opportunity Clause, including suspension, termination and cancellation of existing subcontracts as may be imposed or ordered pursuant to Executive Order 11246, as amended, and its implementing regulations, by the Office of Federal Contract Compliance Programs. Any Contractor who fails to carry out such sanctions and penalties shall be in violation of these specifications and Executive Order 11246, as amended.
 13. The Contractor, in fulfilling its obligations under these specifications, shall implement specific affirmative action steps, at least as extensive as those standards prescribed in item 7 of these specifications, so as to achieve maximum results from its efforts to ensure equal employment opportunity. If the Contractor fails to comply with the requirements of the Executive Order, the implementing regulations, or these specifications, the Director shall proceed in accordance with 41 CFR 60-4.8.
 14. The Contractor shall designate a responsible official to monitor all employment related activity to ensure that the company EEO policy is being carried out, to submit reports relating to the provisions hereof as may be required by the Government and to keep records. Records shall at least include for each employee the name, address, telephone numbers, construction trade, union affiliation if any, employee identification number when assigned, social security number, race, sex, status (e.g., mechanic, apprentice trainee, helper, or laborer), dates of changes in status, hours worked per week in the indicated trade, rate of pay, and locations at which the work was performed. Records shall be maintained in an easily understandable and retrievable form; however, to the degree that existing records satisfy this requirement, contractors shall not be required to maintain separate records.
 15. Nothing herein provided shall be construed as a limitation upon the application of other laws which establish different standards of compliance or upon the application of requirements for the hiring of local or other area residents (e.g., those under the Public Works Employment Act of 1977 and the Community Development Block Grant Program).
- 3.3.** Segregated Facilities (41 CFR 60-1.8). The contractor must ensure that facilities provided for employees are provided in such a manner that segregation on the basis of race, color, religion, sex, sexual orientation, gender identity, or national origin cannot result. The contractor may neither require such segregated use by written or oral policies nor tolerate such use by employee custom. The contractor's obligation extends further to ensuring that its employees are not assigned to perform their services at any location, under the contractor's control, where the facilities are segregated. This obligation extends to all contracts containing the equal opportunity clause regardless of the amount of the contract. The term "facilities," as used in this section, means waiting rooms, work areas, restaurants and other eating areas, time clocks, restrooms, wash rooms, locker rooms, and other

storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing provided for employees; Provided, That separate or single-user restrooms and necessary dressing or sleeping areas shall be provided to assure privacy between the sexes.

4. VIOLATION OR BREACH OF REQUIREMENTS:

- 4.1.** If at any time during the course of the Contract there is a violation of the Affirmative Action or Equal Employment Opportunity requirements by the Contractor, or the Subcontractors, the City will notify the Contractor of the breach. The City may withhold any further progress payments to the Contractor until the City is satisfied that the Contractor and Subcontractors are in full compliance with these requirements.

5. MONTHLY EMPLOYMENT UTILIZATION REPORTS:

- 5.1.** Refer to GENERAL EQUAL OPPORTUNITY CONTRACTING PROGRAM REQUIREMENTS, CONSTRUCTION CONTRACTOR REQUIREMENTS in The WHITEBOOK and the following:
1. Federal and Non-Federal Work in San Diego County. Submit an updated list only if work is complete or new contracts have been awarded during the span of this project.

6. RECORDS OF PAYMENTS TO DBEs:

- 6.1.** The Contractor shall maintain records and documents of payments to DBEs for 5 years following the NOC. These records shall be made available for inspection upon request by any authorized representative of the City, funding agency, or both. The reporting requirement shall be extended to any certified DBE Subcontractor.

7. FEDERAL WAGE REQUIREMENTS FOR FEDERALLY FUNDED PROJECTS:

- 7.1.** The successful Bidder's work shall be required to comply with Executive Order 11246, entitled "Equal Employment Opportunity," as amended by Executive Order 11375, and as supplemented in Department of Labor regulations (41 CFR chapter 60).
- 7.2.** This Executive Order pertains to Equal Employment Opportunity regulations and contains significant changes to the regulations including new goals and timetables for women in construction and revised goals and time-tables for minorities in construction.
- 7.3.** Minimum wage rates for this project have been predetermined by the Secretary of Labor and are set forth in the Decision of the Secretary and bound into the specifications book. Should there be any difference between the state or federal wage rates, including health and welfare funds for any given craft, mechanic, or similar classifications needed to execute the Work, it shall be mandatory upon the Contractor or subcontractor to pay the higher of the two rates.
- 7.4.** The minimum wage rate to be paid by the Contractor and the Subcontractors shall be in accordance with the Federal Labor Standards Provisions (see pages below) and Federal Wage Rates (see Wage Rates below) and General Prevailing Wage Determination made by the State of California, Director of Industrial Relations pursuant to California Labor Code Part 7, Chapter 1, Article 2, Sections 1770, 1773 and 1773.1, whichever is higher.

- 7.5. A Contractor having 50 or more employees and its Subcontractors having 50 or more employees and who may be awarded a contract of \$50,000 or more will be required to maintain an affirmative action program, the standards for which are contained in the specifications.
- 7.6. To be eligible for award, each Bidder shall comply with the affirmative action requirements which are contained in the specifications.
- 7.7. Women will be afforded equal opportunity in all areas of employment. However, the employment of women shall not diminish the standards of requirements for the employment of minorities.
8. **PREVAILING WAGE RATES:** Pursuant to San Diego Municipal Code section 22.3019, construction, alteration, demolition, repair and maintenance work performed under this Contract is subject to State prevailing wage laws. For construction work performed under this Contract cumulatively exceeding \$25,000 and for alteration, demolition, repair and maintenance work performed under this Contract cumulatively exceeding \$15,000, the Contractor and its subcontractors shall comply with State prevailing wage laws including, but not limited to, the requirements listed below.
- 8.1. **Compliance with Prevailing Wage Requirements.** Pursuant to sections 1720 through 1861 of the California Labor Code, the Contractor and its subcontractors shall ensure that all workers who perform work under this Contract are paid not less than the prevailing rate of per diem wages as determined by the Director of the California Department of Industrial Relations (DIR). This includes work performed during the design and preconstruction phases of construction including, but not limited to, inspection and land surveying work.
- 8.1.1. Copies of such prevailing rate of per diem wages are on file at the City and are available for inspection to any interested party on request. Copies of the prevailing rate of per diem wages also may be found at <http://www.dir.ca.gov/OPRL/DPreWageDetermination.htm>. Contractor and its subcontractors shall post a copy of the prevailing rate of per diem wages determination at each job site and shall make them available to any interested party upon request.
- 8.1.2. The wage rates determined by the DIR refer to expiration dates. If the published wage rate does not refer to a predetermined wage rate to be paid after the expiration date, then the published rate of wage shall be in effect for the life of this Contract. If the published wage rate refers to a predetermined wage rate to become effective upon expiration of the published wage rate and the predetermined wage rate is on file with the DIR, such predetermined wage rate shall become effective on the date following the expiration date and shall apply to this Contract in the same manner as if it had been published in said publication. If the predetermined wage rate refers to one or more additional expiration dates with additional predetermined wage rates, which expiration dates occur during the life of this Contract, each successive predetermined wage rate shall apply to this Contract on the date following the expiration date of the previous wage rate. If the last of such predetermined wage rates expires during the life of this Contract, such wage rate shall apply to the balance of the Contract.

- 8.2. Penalties for Violations.** Contractor and its subcontractors shall comply with California Labor Code section 1775 in the event a worker is paid less than the prevailing wage rate for the work or craft in which the worker is employed. This shall be in addition to any other applicable penalties allowed under Labor Code sections 1720 – 1861.
- 8.3. Payroll Records.** Contractor and its subcontractors shall comply with California Labor Code section 1776, which generally requires keeping accurate payroll records, verifying and certifying payroll records, and making them available for inspection. Contractor shall require its subcontractors to also comply with section 1776. Contractor and its subcontractors shall submit weekly certified payroll records online via the City's web-based Labor Compliance Program. Contractor is responsible for ensuring its subcontractors submit certified payroll records to the City.
- 8.3.1.** For contracts entered into on or after April 1, 2015, Contractor and their subcontractors shall furnish records specified in Labor Code section 1776 directly to the Labor Commissioner in the manner required by Labor Code section 1771.4.
- 8.4. Apprentices.** Contractor and its subcontractors shall comply with California Labor Code sections 1777.5, 1777.6 and 1777.7 concerning the employment and wages of apprentices. Contractor is held responsible for the compliance of their subcontractors with sections 1777.5, 1777.6 and 1777.7.
- 8.5. Working Hours.** Contractor and their subcontractors shall comply with California Labor Code sections 1810 through 1815, including but not limited to: (i) restrict working hours on public works contracts to eight hours a day and forty hours a week, unless all hours worked in excess of 8 hours per day are compensated at not less than 1½ times the basic rate of pay; and (ii) specify penalties to be imposed on contractors and subcontractors of \$25 per worker per day for each day the worker works more than 8 hours per day and 40 hours per week in violation of California Labor Code sections 1810 through 1815.
- 8.6. Required Provisions for Subcontracts.** Contractor shall include at a minimum a copy of the following provisions in any contract they enter into with a subcontractor: California Labor Code sections 1771, 1771.1, 1775, 1776, 1777.5, 1810, 1813, 1815, 1860 and 1861.
- 8.7. Labor Code Section 1861 Certification.** Contractor in accordance with California Labor Code section 3700 is required to secure the payment of compensation of its employees and by signing this Contract, Contractor certifies that "I am aware of the provisions of Section 3700 of the California Labor Code which require every employer to be insured against liability for workers' compensation or to undertake self-insurance in accordance with the provisions of that code, and I will comply with such provisions before commencing the performance of the work of this Contract."
- 8.8. Labor Compliance Program.** The City has its own Labor Compliance Program authorized in August 2011 by the DIR. The City will withhold contract payments when payroll records are delinquent or deemed inadequate by the City or other governmental entity, or it has been established after an investigation by the City or other governmental entity that underpayment(s) have occurred. For questions or assistance, please contact the City of San Diego's Prevailing Wage Unit at 858-627-3200.

- 8.9. Contractor and Subcontractor Registration Requirements.** This project is subject to compliance monitoring and enforcement by the DIR. A contractor or subcontractor shall not be qualified to bid on, be listed in a bid or proposal, subject to the requirements of section 4104 of the Public Contract Code, or engage in the performance of any contract for public work, unless currently registered and qualified to perform public work pursuant to Labor Code section 1725.5. It is not a violation of this section for an unregistered contractor to submit a bid that is authorized by Section 7029.1 of the Business and Professions code or by Section 10164 or 20103.5 of the Public Contract Code, provided the contractor is registered to perform public work pursuant to Section 1725.5 at the time the contract is awarded.
- 8.9.1.** A Contractor's inadvertent error in listing a subcontractor who is not registered pursuant to Labor Code section 1725.5 in response to a solicitation shall not be grounds for filing a bid protest or grounds for considering the bid non-responsive provided that any of the following apply: (1) the subcontractor is registered prior to bid opening; (2) within twenty-four hours after the bid opening, the subcontractor is registered and has paid the penalty registration fee specified in Labor Code section 1725.5; or (3) the subcontractor is replaced by another registered subcontractor pursuant to Public Contract Code section 4107.
- 8.9.2.** By submitting a bid or proposal to the City, Contractor is certifying that he or she has verified that all subcontractors used on this public work project are registered with the DIR in compliance with Labor Code sections 1771.1 and 1725.5, and Contractor shall provide proof of registration for themselves and all listed subcontractors to the City at the time of bid or proposal due date or upon request.
- 8.10. Stop Order.** For Contractor or its subcontractors engaging in the performance of any public work contract without having been registered in violation of Labor Code sections 1725.5 or 1771.1, the Labor Commissioner shall issue and serve a stop order prohibiting the use of the unregistered contractors or unregistered subcontractor(s) on ALL public works until the unregistered contractor or unregistered subcontractor(s) is registered. Failure to observe a stop order is a misdemeanor.
- 8.11. List of all Subcontractors.** The City may ask Contractor for the most current list of subcontractors (regardless of tier), along with their DIR registration numbers, utilized on this Agreement at any time during performance of this contract, and Contractor shall provide the list within ten (10) working days of the City's request. Additionally, Contractor shall provide the City with a complete list of all subcontractors utilized on this contract (regardless of tier), within ten working days of the completion of the contract, along with their DIR registration numbers. The City shall withhold final payment to Contractor until at least 30 days after this information is provided to the City.
- 8.12. Exemptions for Small Projects.** There are limited exemptions for installation, alteration, demolition, or repair work done on projects of \$25,000 or less. The Contractor shall still comply with Labor Code sections 1720 et. seq. The only recognized exemptions are listed below:
- 8.12.1. Registration.** The Contractor will not be required to register with the DIR for small projects. (Labor Code section 1771.1).

8.12.2. Certified Payroll Records. The records required in Labor Code section 1776 shall be required to be kept and submitted to the City of San Diego, but will not be required to be submitted online with the DIR directly. The Contractor will need to keep those records for at least three years following the completion of the Contract. (Labor Code section 1771.4).

8.12.3. List of all Subcontractors. The Contractor shall not be required to hire only registered subcontractors and is exempt from submitting the list of all subcontractors that is required in section 8.11 above. (Labor code section 1773.3).

9. WAGE RATES: This contract shall be subject to the following Davis-Bacon Wage Decisions:

"General Decision Number: CA20200001 04/17/2020

Superseded General Decision Number: CA20190001

State: California

Construction Types: Building, Heavy (Heavy and Dredging),
Highway and Residential

County: San Diego County in California.

BUILDING CONSTRUCTION PROJECTS; DREDGING PROJECTS (does not include hopper dredge work); HEAVY CONSTRUCTION PROJECTS (does not include water well drilling); HIGHWAY CONSTRUCTION PROJECTS; RESIDENTIAL CONSTRUCTION PROJECTS (consisting of single family homes and apartments up to and including 4 stories)

Note: Under Executive Order (EO) 13658, an hourly minimum wage of \$10.80 for calendar year 2020 applies to all contracts subject to the Davis-Bacon Act for which the contract is awarded (and any solicitation was issued) on or after January 1, 2015. If this contract is covered by the EO, the contractor must pay all workers in any classification listed on this wage determination at least \$10.80 per hour (or the applicable wage rate listed on this wage determination, if it is higher) for all hours spent performing on the contract in calendar year 2020. If this contract is covered by the EO and a classification considered necessary for performance of work on the contract does not appear on this wage determination, the contractor must pay workers in that classification at least the wage rate determined through the conformance process set forth in 29 CFR 5.5(a)(1)(ii) (or the EO minimum wage rate, if it is higher than the conformed wage rate). The EO minimum wage rate will be adjusted annually. Please note that this EO applies to the above-mentioned types of contracts entered into by the federal government that are subject to the Davis-Bacon Act itself, but it does not apply to contracts subject only to the Davis-Bacon Related Acts, including those set forth at 29 CFR 5.1(a)(2)-(60). Additional information on contractor requirements and worker protections under the EO is available at www.dol.gov/whd/govcontracts.

Modification Number	Publication Date
0	01/03/2020
1	01/10/2020
2	01/31/2020
3	03/06/2020
4	04/17/2020

ASBE0005-002 09/01/2019

	Rates	Fringes
Asbestos Workers/Insulator (Includes the application of all insulating materials, protective coverings, coatings, and finishes to all types of mechanical systems).....\$	43.77	22.48
Fire Stop Technician (Application of Firestopping Materials for wall openings and penetrations in walls, floors, ceilings and curtain walls).....	\$ 28.92	18.73

ASBE0005-004 07/01/2019

	Rates	Fringes
Asbestos Removal worker/hazardous material handler (Includes preparation, wetting, stripping, removal, scrapping, vacuuming, bagging and disposing of all insulation materials from mechanical systems, whether they contain asbestos or not)....	\$ 20.63	12.17

BOIL0092-003 03/01/2018

	Rates	Fringes
BOILERMAKER.....	\$ 44.07	33.52

	Rates	Fringes
BRICKLAYER; MARBLE SETTER.....	\$ 38.21	17.44

BRCA0018-004 06/01/2019

	Rates	Fringes
MARBLE FINISHER.....	\$ 33.	14.11
TILE FINISHER.....	\$ 28.23	12.65
TILE LAYER.....	\$ 40.07	18.36

BRCA0018-010 09/01/2018

	Rates	Fringes
TERRAZZO FINISHER.....	\$ 31.25	13.41
TERRAZZO WORKER/SETTER.....	\$ 38.39	14.18

CARP0409-002 07/01/2016

	Rates	Fringes
Diver		
(1) Wet	\$ 712.48	17.03
(2) Standby.....	\$ 356.24	17.03
(3) Tender.....	\$ 348.24	17.03
(4) Assistant Tender.....	\$ 324.24	17.03

Amounts in "'Rates' column are per day

CARP0409-008 08/01/2010

	Rates	Fringes
Modular Furniture Installer.....	\$ 17.00	7.41

CARP0547-001 07/01/2018

	Rates	Fringes
CARPENTER		
(1) Bridge.....	\$ 42.34	19.17
(2) Commercial Building....	\$ 37.11	19.17
(3) Heavy & Highway.....	\$ 42.21	19.17
(4) Residential Carpenter..	\$ 29.69	19.17
(5) Residential		
Insulation Installer.....	\$ 18.00	8.16
MILLWRIGHT.....	\$ 48.71	19.17
PILEDRIVERMAN.....	\$ 42.34	19.17

CARP0547-002 07/01/2017

	Rates	Fringes
Drywall		
(1) Work on wood framed construction of single family residences, apartments or condominiums under four stories		
Drywall Installer/Lather...	\$ 22.95	18.85
Drywall Stocker/Scrapper...	\$ 12.50	12.27
(2) All other work		
Drywall Installer/Lather...	\$ 32.00	17.63
Drywall Stocker/Scrapper...	\$ 12.50	12.27

ELEC0569-001 06/03/2019

	Rates	Fringes
Electricians (Tunnel Work)		
Cable Splicer.....	\$ 50.81	3%+13.63
Electrician.....	\$ 50.06	3%+13.63
Electricians: (All Other Work, Including 4 Stories Residential)		
	Rates	Fringes
Cable Splicer.....	\$ 45.75	3%+14.88
Electrician.....	\$ 45.00	3%+14.88

ELEC0569-004 08/26/2019

	Rates	Fringes
ELECTRICIAN (Sound & Communications Sound Technician).....	\$ 32.95	13.02

SCOPE OF WORK Assembly, installation, operation, service and maintenance of components or systems as used in closed circuit television, amplified master television distribution, CATV on private property, intercommunication, burglar alarm, fire alarm, life support and all security alarms, private and public telephone and related telephone interconnect, public address, paging, audio, language, electronic, background music system less than line voltage or any system acceptable for class two wiring for private, commercial, or industrial use furnished by leased wire, frequency modulation or other recording devices, electrical apparatus by means of which electricity is applied to the amplification, transmission, transference, recording or reproduction of voice, music, sound, impulses and video. Excluded from this Scope of Work - transmission, service and maintenance of background music. All of the above shall include the installation and transmission over fiber optics.

ELEC0569-005 08/26/2019

	Rates	Fringes
Sound & Communications Sound Technician.....	\$ 32.95	13.02

SCOPE OF WORK Assembly, installation, operation, service and maintenance of components or systems as used in closed circuit television, amplified master television distribution, CATV on private property, intercommunication, burglar alarm, fire alarm, life support and all security alarms, private and public telephone and related telephone interconnect, public address, paging, audio, language, electronic, background music system less than line voltage or any system acceptable for

class two wiring for private, commercial, or industrial use furnished by leased wire, frequency modulation or other recording devices, electrical apparatus by means of which electricity is applied to the amplification, transmission, transference, recording or reproduction of voice, music, sound, impulses and video. Excluded from this Scope of Work - transmission, service and maintenance of background music. All of the above shall include the installation and transmission over fiber optics.

SOUND TECHNICIAN: Terminating, operating and performing final check-out

ELEC0569-006 10/01/2018

Work on street lighting; traffic signals; and underground systems and/or established easements outside of buildings

	Rates	Fringes
Traffic signal, street light and underground work		
Utility Technician #1.....	\$ 32.44	8.67
Utility Technician #2.....	\$ 27.05	8.51

STREET LIGHT & TRAFFIC SIGNAL WORK:

UTILITY TECHNICIAN #1: Installation of street lights and traffic signals, including electrical circuitry, programmable controller, pedestal-mounted electrical meter enclosures and laying of pre-assembled cable in ducts. The layout of electrical systems and communication installation including proper position of trench depths, and radius at duct banks, location for manholes, street lights and traffic signals.

UTILITY TECHNICIAN #2: Distribution of material at jobsite, installation of underground ducts for electrical, telephone, cable TV and communication systems. The setting, leveling, grounding and racking of precast manholes, handholes and transformer pads.

ELEC0569-008 06/03/2019

	Rates	Fringes
ELECTRICIAN (Residential, 1-3 Stories).....	\$ 34.69	7.65
-		

ELEC1245-001 01/01/2020

	Rates	Fringes
LINE CONSTRUCTION		
(1) Lineman; Cable splicer..	\$ 58.09	19.74

	Rates	Fringes
(2) Equipment specialist (operates crawler tractors, commercial motor vehicles, backhoes, trenchers, cranes (50 tons and below), overhead & underground distribution line equipment).....	\$ 46.40	18.55
(3) Groundman.....	\$ 35.47	18.17
(4) Powderman.....	\$ 51.87	18.79

HOLIDAYS: New Year's Day, M.L. King Day, Memorial Day,
Independence Day, Labor Day, Veterans Day, Thanksgiving Day
and day after Thanksgiving, Christmas Day

ELEV0018-001 01/01/2020

	Rates	Fringes
ELEVATOR MECHANIC.....	\$ 57.40	34.765+a+b

FOOTNOTE:

- a. PAID VACATION: Employer contributes 8% of regular hourly
rate as vacation pay credit for employees with more than 5
years of service, and 6% for 6 months to 5 years of service.
b. PAID HOLIDAYS: New Years Day, Memorial Day, Independence
Day, Labor Day, Veterans Day, Thanksgiving Day, Friday
after Thanksgiving, and Christmas Day.

ENGI0012-003 07/01/2018

	Rates	Fringes
OPERATOR: Power Equipment (All Other Work)		
GROUP 1.....	\$ 45.30	25.25
GROUP 2.....	\$ 46.08	25.25
GROUP 3.....	\$ 46.37	25.25
GROUP 4.....	\$ 47.86	25.25
GROUP 5.....	\$ 48.96	25.25
GROUP 6.....	\$ 48.08	25.25
GROUP 8.....	\$ 48.19	25.25
GROUP 9.....	\$ 49.29	25.25
GROUP 10.....	\$ 48.31	25.25
GROUP 11.....	\$ 49.41	25.25
GROUP 12.....	\$ 48.48	25.25
GROUP 13.....	\$ 48.58	25.25
GROUP 14.....	\$ 48.61	25.25
GROUP 15.....	\$ 48.69	25.25
GROUP 16.....	\$ 48.81	25.25
GROUP 17.....	\$ 48.98	25.25
GROUP 18.....	\$ 49.08	25.25
GROUP 19.....	\$ 49.19	25.25
GROUP 20.....	\$ 49.31	25.25

	Rates	Fringes
GROUP 21.....	\$ 49.48	25.25
GROUP 22.....	\$ 49.58	25.25
GROUP 23.....	\$ 49.69	25.25
GROUP 24.....	\$ 49.81	25.25
GROUP 25.....	\$ 49.98	25.25

	Rates	Fringes
OPERATOR: Power Equipment (Cranes, Piledriving & Hoisting)		
GROUP 1.....	\$ 46.65	25.25
GROUP 2.....	\$ 47.43	25.25
GROUP 3.....	\$ 47.72	25.25
GROUP 4.....	\$ 47.86	25.25

	Rates	Fringes
GROUP 5.....	\$ 48.08	25.25
GROUP 6.....	\$ 48.19	25.25
GROUP 7.....	\$ 48.31	25.25
GROUP 8.....	\$ 48.48	25.25
GROUP 9.....	\$ 48.65	25.25
GROUP 10.....	\$ 49.65	25.25
GROUP 11.....	\$ 50.65	25.25
GROUP 12.....	\$ 51.65	25.25
GROUP 13.....	\$ 52.65	25.25

	Rates	Fringes
OPERATOR: Power Equipment (Tunnel Work)		
GROUP 1.....	\$ 47.15	25.25
GROUP 2.....	\$ 47.93	25.25
GROUP 3.....	\$ 48.22	25.25
GROUP 4.....	\$ 48.39	25.25
GROUP 5.....	\$ 48.58	25.25
GROUP 6.....	\$ 48.69	25.25
GROUP 7.....	\$ 48.81	25.25

PREMIUM PAY:

\$3.75 per hour shall be paid on all Power Equipment Operator work on the following Military Bases: China Lake Naval Reserve, Vandenberg AFB, Point Arguello, Seely Naval Base, Fort Irwin, Nebo Annex Marine Base, Marine Corp Logistics Base Yermo, Edwards AFB, 29 Palms Marine Base and Camp Pendleton

Workers required to suit up and work in a hazardous material environment: \$2.00 per hour additional. Combination mixer and compressor operator on gunite work shall be classified as a concrete mobile mixer operator.

SEE ZONE DEFINITIONS AFTER CLASSIFICATIONS

POWER EQUIPMENT OPERATORS CLASSIFICATIONS

GROUP 1: Bargeman; Brakeman; Compressor operator; Ditch Witch, with seat or similar type equipment; Elevator operator-inside; Engineer Oiler; Forklift operator (includes loed, lull or similar types under 5 tons; Generator operator; Generator, pump or compressor plant operator; Pump operator; Signalman; Switchman

GROUP 2: Asphalt-rubber plant operator (nurse tank operator); Concrete mixer operator-skip type; Conveyor operator; Fireman; Forklift operator (includes loed, lull or similar types over 5 tons; Hydrostatic pump operator; oiler crusher (asphalt or concrete plant); Petromat laydown machine; PJU side dum jack; Screening and conveyor machine operator (or similar types); Skiploader (wheel type up to 3/4 yd. without attachment); Tar pot fireman; Temporary heating plant operator; Trenching machine oiler

GROUP 3: Asphalt-rubber blend operator; Bobcat or similar type (Skid steer); Equipment greaser (rack); Ford Ferguson (with dragtype attachments); Helicopter radioman (ground); Stationary pipe wrapping and cleaning machine operator

GROUP 4: Asphalt plant fireman; Backhoe operator (mini-max or similar type); Boring machine operator; Boxman or mixerman (asphalt or concrete); Chip spreading machine operator; Concrete cleaning decontamination machine operator; Concrete Pump Operator (small portable); Drilling machine operator, small auger types (Texoma super economatic or similar types - Hughes 100 or 200 or similar types - drilling depth of 30' maximum); Equipment greaser (grease truck); Guard rail post driver operator; Highline cableway signalman; Hydra-hammer-aero stomper; Micro Tunneling (above ground tunnel); Power concrete curing machine operator; Power concrete saw operator; Power-driven jumbo form setter operator; Power sweeper operator; Rock Wheel Saw/Trencher; Roller operator (compacting); Screed operator (asphalt or concrete); Trenching machine operator (up to 6 ft.); Vacuum or much truck

GROUP 5: Equipment Greaser (Grease Truck/Multi Shift).

GROUP 6: Articulating material hauler; Asphalt plant engineer; Batch plant operator; Bit sharpener; Concrete joint machine operator (canal and similar type); Concrete planer operator; Dandy digger; Deck engine operator; Derrickman (oilfield type); Drilling machine operator, bucket or auger types (Calweld 100 bucket or similar types - Watson 1000 auger or similar types - Texoma 330, 500 or 600 auger or similar types - drilling depth of 45' maximum); Drilling machine operator; Hydrographic seeder machine operator (straw, pulp or seed), Jackson track maintainer, or similar type; Kalamazoo Switch tamper, or similar type; Machine tool operator; Maginnis internal full slab vibrator, Mechanical berm, curb or gutter (concrete or asphalt); Mechanical finisher operator (concrete, Clary-Johnson-Bidwell or similar); Micro tunnel system

(below ground); Pavement breaker operator (truck mounted); Road oil mixing machine operator; Roller operator (asphalt or finish), rubber-tired earth moving equipment (single engine, up to and including 25 yds. struck); Self-propelled tar pipelining machine operator; Skiploader operator (crawler and wheel type, over 3/4 yd. and up to and including 1-1/2 yds.); Slip form pump operator (power driven hydraulic lifting device for concrete forms); Tractor operator-bulldozer, tamper-scraper (single engine, up to 100 h.p. flywheel and similar types, up to and including D-5 and similar types); Tugger hoist operator (1 drum); Ultra high pressure waterjet cutting tool system operator; Vacuum blasting machine operator

GROUP 8: Asphalt or concrete spreading operator (tamping or finishing); Asphalt paving machine operator (Barber Greene or similar type); Asphalt-rubber distribution operator; Backhoe operator (up to and including 3/4 yd.), small ford, Case or similar; Cast-in-place pipe laying machine operator; Combination mixer and compressor operator (guniting work); Compactor operator (self-propelled); Concrete mixer operator (paving); Crushing plant operator; Drill Doctor; Drilling machine operator, Bucket or auger types (Calweld 150 bucket or similar types - Watson 1500, 2000 2500 auger or similar types - Texoma 700, 800 auger or similar types - drilling depth of 60' maximum); Elevating grader operator; Grade checker; Gradall operator; Grouting machine operator; Heavy-duty repairman; Heavy equipment robotics operator; Kalamazoo balliste regulator or similar type; Kolman belt loader and similar type; Le Tourneau blob compactor or similar type; Loader operator (Athey, Euclid, Sierra and similar types); Mobark Chipper or similar; Ozzie padder or similar types; P.C. slot saw; Pneumatic concrete placing machine operator (Hackley-Presswell or similar type); Pumpcrete gun operator; Rock Drill or similar types; Rotary drill operator (excluding caisson type); Rubber-tired earth-moving equipment operator (single engine, caterpillar, Euclid, Athey Wagon and similar types with any and all attachments over 25 yds. up to and including 50 cu. yds. struck); Rubber-tired earth-moving equipment operator (multiple engine up to and including 25 yds. struck); Rubber-tired scraper operator (self-loading paddle wheel type-John Deere, 1040 and similar single unit); Self-propelled curb and gutter machine operator; Shuttle buggy; Skiploader operator (crawler and wheel type over 1-1/2 yds. up to and including 6-1/2 yds.); Soil remediation plant operator; Surface heaters and planer operator; Tractor compressor drill combination operator; Tractor operator (any type larger than D-5 - 100 flywheel h.p. and over, or similar-bulldozer, tamper, scraper and push tractor single engine); Tractor operator (boom attachments), Traveling pipe wrapping, cleaning and bending machine operator; Trenching machine operator (over 6 ft. depth capacity, manufacturer's rating); trenching Machine with Road Miner attachment (over 6 ft depth capacity); Ultra high pressure waterjet cutting tool system mechanic; Water pull (compaction) operator

GROUP 9: Heavy Duty Repairman

GROUP 10: Drilling machine operator, Bucket or auger types (Calweld 200 B bucket or similar types-Watson 3000 or 5000 auger or similar types-Texoma 900 auger or similar types-drilling depth of 105' maximum); Dual drum mixer, dynamic compactor LDC350 (or similar types); Monorail locomotive operator (diesel, gas or electric); Motor patrol-blade operator (single engine); Multiple engine tractor operator (Euclid and similar type-except Quad 9 cat.); Rubber-tired earth-moving equipment operator (single engine, over 50 yds. struck); Pneumatic pipe ramming tool and similar types; Prestressed wrapping machine operator; Rubber-tired earth-moving equipment operator (single engine, over 50 yds. struck); Rubber tired earth moving equipment operator (multiple engine, Euclid, caterpillar and similar over 25 yds. and up to 50 yds. struck), Tower crane repairman; Tractor loader operator (crawler and wheel type over 6-1/2 yds.); Woods mixer operator (and similar Pugmill equipment)

GROUP 11: Heavy Duty Repairman - Welder Combination, Welder - Certified.

GROUP 12: Auto grader operator; Automatic slip form operator; Drilling machine operator, bucket or auger types (Calweld, auger 200 CA or similar types - Watson, auger 6000 or similar types - Hughes Super Duty, auger 200 or similar types - drilling depth of 175' maximum); Hoe ram or similar with compressor; Mass excavator operator less tha 750 cu. yards; Mechanical finishing machine operator; Mobile form traveler operator; Motor patrol operator (multi-engine); Pipe mobile machine operator; Rubber-tired earth- moving equipment operator (multiple engine, Euclid, Caterpillar and similar type, over 50 cu. yds. struck); Rubber-tired self- loading scraper operator (paddle-wheel-auger type self-loading - two (2) or more units)

GROUP 13: Rubber-tired earth-moving equipment operator operating equipment with push-pull system (single engine, up to and including 25 yds. struck)

GROUP 14: Canal liner operator; Canal trimmer operator; Remote- control earth-moving equipment operator (operating a second piece of equipment: \$1.00 per hour additional); Wheel excavator operator (over 750 cu. yds.)

GROUP 15: Rubber-tired earth-moving equipment operator, operating equipment with push-pull system (single engine, Caterpillar, Euclid, Athey Wagon and similar types with any and all attachments over 25 yds. and up to and including 50 yds. struck); Rubber-tired earth-moving equipment operator, operating equipment with push-pull system (multiple engine-up to and including 25 yds. struck)

GROUP 16: Rubber-tired earth-moving equipment operator, operating equipment with push-pull system (single engine, over 50 yds. struck); Rubber-tired earth-moving equipment operator, operating equipment with push-pull system (multiple engine, Euclid, Caterpillar and similar, over 25 yds. and up to 50 yds. struck)

GROUP 17: Rubber-tired earth-moving equipment operator, operating equipment with push-pull system (multiple engine, Euclid, Caterpillar and similar, over 50 cu. yds. struck); Tandem tractor operator (operating crawler type tractors in tandem - Quad 9 and similar type)

GROUP 18: Rubber-tired earth-moving equipment operator, operating in tandem (scrapers, belly dumps and similar types in any combination, excluding compaction units - single engine, up to and including 25 yds. struck)

GROUP 19: Rotex concrete belt operator (or similar types); Rubber-tired earth-moving equipment operator, operating in tandem (scrapers, belly dumps and similar types in any combination, excluding compaction units - single engine, Caterpillar, Euclid, Athey Wagon and similar types with any and all attachments over 25 yds. and up to and including 50 cu. yds. struck); Rubber-tired earth-moving equipment operator, operating in tandem (scrapers, belly dumps and similar types in any combination, excluding compaction units - multiple engine, up to and including 25 yds. struck)

GROUP 20: Rubber-tired earth-moving equipment operator, operating in tandem (scrapers, belly dumps and similar types in any combination, excluding compaction units - single engine, over 50 yds. struck); Rubber-tired earth-moving equipment operator, operating in tandem (scrapers, belly dumps, and similar types in any combination, excluding compaction units - multiple engine, Euclid, Caterpillar and similar, over 25 yds. and up to 50 yds. struck)

GROUP 21: Rubber-tired earth-moving equipment operator, operating in tandem (scrapers, belly dumps and similar types in any combination, excluding compaction units - multiple engine, Euclid, Caterpillar and similar type, over 50 cu. yds. struck)

GROUP 22: Rubber-tired earth-moving equipment operator, operating equipment with the tandem push-pull system (single engine, up to and including 25 yds. struck)

GROUP 23: Rubber-tired earth-moving equipment operator, operating equipment with the tandem push-pull system (single engine, Caterpillar, Euclid, Athey Wagon and similar types with any and all attachments over 25 yds. and up to and including 50 yds. struck); Rubber-tired earth-moving equipment operator, operating with the tandem push-pull system (multiple engine, up to and including 25 yds. struck)

GROUP 24: Rubber-tired earth-moving equipment operator, operating equipment with the tandem push-pull system (single engine, over 50 yds. struck); Rubber-tired earth-moving equipment operator, operating equipment with the tandem push-pull system (multiple engine, Euclid, Caterpillar and similar, over 25 yds. and up to 50 yds. struck)

GROUP 25: Concrete pump operator-truck mounted; Rubber-tired earth-moving equipment operator, operating equipment with the tandem push-pull system (multiple engine, Euclid, Caterpillar and similar type, over 50 cu. yds. struck)

CRANES, PILEDRIVING AND HOISTING EQUIPMENT CLASSIFICATIONS

GROUP 1: Engineer oiler; Fork lift operator (includes loed, lull or similar types)

GROUP 2: Truck crane oiler

GROUP 3: A-frame or winch truck operator; Ross carrier operator (jobsite)

GROUP 4: Bridge-type unloader and turntable operator; Helicopter hoist operator

GROUP 5: Hydraulic boom truck; Stinger crane (Austin-Western or similar type); Tugger hoist operator (1 drum)

GROUP 6: Bridge crane operator; Cretor crane operator; Hoist operator (Chicago boom and similar type); Lift mobile operator; Lift slab machine operator (Vagtborg and similar types); Material hoist and/or manlift operator; Polar gantry crane operator; Self Climbing scaffold (or similar

type); Shovel, backhoe, dragline, clamshell operator (over 3/4 yd. and up to 5 cu. yds. mrc); Tugger hoist operator
GROUP 7: Pedestal crane operator; Shovel, backhoe, dragline, clamshell operator (over 5 cu. yds. mrc); Tower crane repair; Tugger hoist operator (3 drum)

GROUP 8: Crane operator (up to and including 25 ton capacity); Crawler transporter operator; Derrick barge operator (up to and including 25 ton capacity); Hoist operator, stiff legs, Guy derrick or similar type (up to and including 25 ton capacity); Shovel, backhoe, dragline, clamshell operator (over 7 cu. yds., M.R.C.)

GROUP 9: Crane operator (over 25 tons and up to and including 50 tons mrc); Derrick barge operator (over 25 tons up to and including 50 tons mrc); Highline cableway operator; Hoist operator, stiff legs, Guy derrick or similar type (over 25 tons up to and including 50 tons mrc); K-crane operator; Polar crane operator; Self erecting tower crane operator maximum lifting capacity ten tons

GROUP 10: Crane operator (over 50 tons and up to and including 100 tons mrc); Derrick barge operator (over 50 tons up to and including 100 tons mrc); Hoist operator, stiff legs, Guy derrick or similar type (over 50 tons up to

and including 100 tons mrc), Mobile tower crane operator (over 50 tons, up to and including 100 tons M.R.C.); Tower crane operator and tower gantry

GROUP 11: Crane operator (over 100 tons and up to and including 200 tons mrc); Derrick barge operator (over 100 tons up to and including 200 tons mrc); Hoist operator, stiff legs, Guy derrick or similar type (over 100 tons up to and including 200 tons mrc); Mobile tower crane operator (over 100 tons up to and including 200 tons mrc)

GROUP 12: Crane operator (over 200 tons up to and including 300 tons mrc); Derrick barge operator (over 200 tons up to and including 300 tons mrc); Hoist operator, stiff legs, Guy derrick or similar type (over 200 tons, up to and including 300 tons mrc); Mobile tower crane operator (over 200 tons, up to and including 300 tons mrc)

GROUP 13: Crane operator (over 300 tons); Derrick barge operator (over 300 tons); Helicopter pilot; Hoist operator, stiff legs, Guy derrick or similar type (over 300 tons); Mobile tower crane operator (over 300 tons)

TUNNEL CLASSIFICATIONS

GROUP 1: Skiploader (wheel type up to 3/4 yd. without attachment)

GROUP 2: Power-driven jumbo form setter operator

GROUP 3: Dinkey locomotive or motorperson (up to and including 10 tons)

GROUP 4: Bit sharpener; Equipment greaser (grease truck); Slip form pump operator (power-driven hydraulic lifting device for concrete forms); Tugger hoist operator (1 drum); Tunnel locomotive operator (over 10 and up to and including 30 tons)

GROUP 5: Backhoe operator (up to and including 3/4 yd.); Small Ford, Case or similar; Drill doctor; Grouting machine operator; Heading shield operator; Heavy-duty repairperson; Loader operator (Athey, Euclid, Sierra and similar types); Mucking machine operator (1/4 yd., rubber-tired, rail or track type); Pneumatic concrete placing machine operator (Hackley-Presswell or similar type); Pneumatic heading shield (tunnel); Pumpcrete gun operator; Tractor compressor drill combination operator; Tugger hoist operator (2 drum); Tunnel locomotive operator (over 30 tons)

GROUP 6: Heavy Duty Repairman

GROUP 7: Tunnel mole boring machine operator

ENGINEERS ZONES

\$1.00 additional per hour for all of IMPERIAL County and the portions of KERN, RIVERSIDE & SAN BERNARDINO Counties as defined below:

That area within the following Boundary: Begin in San Bernardino County, approximately 3 miles NE of the intersection of I-15 and the California State line at that point which is the NW corner of Section 1, T17N, R14E, San Bernardino Meridian. Continue W in a straight line to that point which is the SW corner of the northwest quarter of Section 6, T27S, R42E, Mt. Diablo Meridian. Continue North to the intersection with the Inyo County Boundary at that point which is the NE corner of the western half of the northern quarter of Section 6, T25S, R42E, MDM. Continue W along the Inyo and San Bernardino County boundary until the intersection with Kern County, as that point which is the SE corner of Section 34, T24S, R40E, MDM. Continue W along the Inyo and Kern County boundary until the intersection with Tulare County, at that point which is the SW corner of the SE quarter of Section 32, T24S, R37E, MDM. Continue W along the Kern and Tulare County boundary, until that point which is the NW corner of T25S, R32E, MDM. Continue S following R32E lines to the NW corner of T31S, R32E, MDM. Continue W to the NW corner of T31S, R31E, MDM. Continue S to the SW corner of T32S, R31E, MDM. Continue W to SW corner of SE quarter of Section 34, T32S, R30E, MDM. Continue S to SW corner of T11N, R17W, SBM. Continue E along south boundary of T11N, SBM to SW corner of T11N, R7W, SBM. Continue S to SW corner of T9N, R7W, SBM. Continue E along south boundary of T9N, SBM to SW corner of T9N, R1E, SBM. Continue S along west boundary of R1E, SBM to Riverside County line at the SW corner of T1S, R1E, SBM. Continue E along south boundary of T1S, SBM (Riverside County Line) to SW corner of T1S, R10E, SBM. Continue S along west boundary of R10E, SBM to Imperial County line at the SW corner of T8S, R10E, SBM. Continue W along Imperial and Riverside county line to NW corner of T9S, R9E, SBM. Continue S along the boundary between Imperial and San Diego Counties, along the west edge of R9E, SBM to the south boundary of Imperial County/California state line. Follow the California state line west to Arizona state line, then north to Nevada state line, then continuing NW back to start at the point which is the NW corner of Section 1, T17N, R14E, SBM

\$1.00 additional per hour for portions of SAN LUIS OBISPO, KERN, SANTA BARBARA & VENTURA as defined below:

That area within the following Boundary: Begin approximately 5 miles north of the community of Cholame, on the Monterey County and San Luis Obispo County boundary at the NW corner of T25S, R16E, Mt. Diablo Meridian. Continue south along the west side of R16E to the SW corner of T30S, R16E, MDM. Continue E to SW corner of T30S, R17E, MDM. Continue S to SW corner of T31S, R17E, MDM. Continue E to SW corner of T31S, R18E, MDM. Continue S along West side of R18E, MDM as it crosses into San Bernardino Meridian numbering area and becomes R30W. Follow the west side of R30W, SBM to the SW corner of T9N, R30W, SBM. Continue E along the south edge of T9N, SBM to the Santa Barbara County and Ventura County boundary at that point which

is the SW corner of Section 34.T9N, R24W, SBM, continue S along the Ventura County line to that point which is the SW corner of the SE quarter of Section 32, T7N, R24W, SBM. Continue E along the south edge of T7N, SBM to the SE corner to T7N, R21W, SBM. Continue N along East side of R21W, SBM to Ventura County and Kern County boundary at the NE corner of T8N, R21W. Continue W along the Ventura County and Kern County boundary to the SE corner of T9N, R21W. Continue North along the East edge of R21W, SBM to the NE corner of T12N, R21W, SBM. Continue West along the north edge of T12N, SBM to the SE corner of T32S, R21E, MDM. [T12N SBM is a think strip between T11N SBM and T32S MDM]. Continue North along the East side of R21E, MDM to the Kings County and Kern County border at the NE corner of T25S, R21E, MDM, continue West along the Kings County and Kern County Boundary until the intersection of San Luis Obispo County. Continue west along the Kings County and San Luis Obispo County boundary until the intersection with Monterey County. Continue West along the Monterey County and San Luis Obispo County boundary to the beginning point at the NW corner of T25S, R16E, MDM.

\$2.00 additional per hour for INYO and MONO Counties and the Northern portion of SAN BERNARDINO County as defined below:

That area within the following Boundary: Begin at the intersection of the northern boundary of Mono County and the California state line at the point which is the center of Section 17, T10N, R22E, Mt. Diablo Meridian. Continue S then SE along the entire western boundary of Mono County, until it reaches Inyo County at the point which is the NE corner of the Western half of the NW quarter of Section 2, T8S, R29E, MDM. Continue SSE along the entire western boundary of Inyo County, until the intersection with Kern County at the point which is the SW corner of the SE 1/4 of Section 32, T24S, R37E, MDM. Continue E along the Inyo and Kern County boundary until the intersection with San Bernardino County at that point which is the SE corner of section 34, T24S, R40E, MDM. Continue E along the Inyo and San Bernardino County boundary until the point which is the NE corner of the Western half of the NW quarter of Section 6, T25S, R42E, MDM. Continue S to that point which is the SW corner of the NW quarter of Section 6, T27S, R42E, MDM. Continue E in a straight line to the California and Nevada state border at the point which is the NW corner of Section 1, T17N, R14E, San Bernardino Meridian. Then continue NW along the state line to the starting point, which is the center of Section 18, T10N, R22E, MDM.

REMAINING AREA NOT DEFINED ABOVE RECIEVES BASE RATE

 ENGI0012-004 08/01/2015

	Rates	Fringes
OPERATOR: Power Equipment		
(DREDGING)		
(1) Leverman.....	\$ 49.50	23.60
(2) Dredge dozer.....	\$ 43.53	23.60
(3) Deckmate.....	\$ 43.42	23.60

	Rates	Fringes
(4) Winch operator (stern winch on dredge).....	\$ 42.87	23.60
(5) Fireman-Oiler, Deckhand, Bargeman, Leveehand.....	\$ 42.33	23.60
(6) Barge Mate.....	\$ 42.94	23.60

IRON0377-002 07/01/2019

	Rates	Fringes
Ironworkers:		
Fence Erector.....	\$ 33.58	24.66
Ornamental, Reinforcing and Structural.....	\$ 40.00	33.30

PREMIUM PAY:

\$6.00 additional per hour at the following locations:

China Lake Naval Test Station, Chocolate Mountains Naval Reserve-Niland, Edwards AFB, Fort Irwin Military Station, Fort Irwin Training Center-Goldstone, San Clemente Island, San Nicholas Island, Susanville Federal Prison, 29 Palms - Marine Corps, U.S. Marine Base - Barstow, U.S. Naval Air Facility - Seale, Vandenberg AFB

\$4.00 additional per hour at the following locations:

Army Defense Language Institute - Monterey, Fallon Air Base, Naval Post Graduate School - Monterey, Yermo Marine Corps Logistics Center

\$2.00 additional per hour at the following locations:

Port Hueneme, Port Mugu, U.S. Coast Guard Station - Two Rock

LABO0089-001 07/01/2019

	Rates	Fringes
LABORER (BUILDING and all other Residential Construction)		
Group 1.....	\$ 32.92	19.54
Group 2.....	\$ 33.60	19.54
Group 3.....	\$ 34.31	19.54
Group 4.....	\$ 35.11	19.54
Group 5.....	\$ 37.04	19.54

LABORER (RESIDENTIAL
CONSTRUCTION - See definition
below)

	Rates	Fringes
(1) Laborer.....	\$ 30.82	17.87
(2) Cleanup, Landscape, Fencing (Chain Link & Wood).	\$ 29.53	17.87

RESIDENTIAL DEFINITION: Wood or metal frame construction of single family residences, apartments and condominiums - excluding (a) projects that exceed three stories over a garage level, (b) any utility work such as telephone, gas, water, sewer and other utilities and (c) any fine grading work, utility work or paving work in the future street and public right-of-way; but including all rough grading work at the job site behind the existing right of way

LABORER CLASSIFICATIONS

GROUP 1: Cleaning and handling of panel forms; Concrete Screeding for Rought Strike-off; Concrete, water curing; Demolition laborer; Flagman; Gas, oil and/or water pipeline laborer; General Laborer; General clean-up laborer; Landscape laborer; Jetting laborer; Temporary water and air lines laborer; Material hoseman (walls, slabs, floors and decks); Plugging, filling of Shee-bolt holes; Dry packing of concrete; Railroad maintenance, Repair Trackman and road beds, Streetcar and railroad construction trac laborers; Slip form raisers; Slurry seal crews (mixer operator, applicator operator, squeegee man, Shuttle man, top man), filling of cracks by any method on any surface; Tarman and mortar man; Tool crib or tool house laborer; Window cleaner; Wire Mesh puling-all concrete pouring operations

GROUP 2: Asphalt Shoveler; Cement Dumper (on 1 yard or larger mixer and handling bulk cement); Cesspool digger and installer; Chucktender; Chute man, pouring concrete, the handling of the cute from ready mix trucks, such as walls, slabs, decks, floors, foundations, footings, curbs, gutters and sidewalks; Concrete curer-impervious membrane and form oiler; Cutting torch operator (demoliton); Guinea chaser; Headboard man-asphlt; Laborer, packing rod steel and pans; membrane vapor barrier installer; Power broom sweepers (small); Riiprap, stonepaver, placing stone or wet sacked concrete; Roto scraper and tiller; Tank sealer and cleaner; Tree climber, faller, chain saw operator, Pittsburgh Chipper and similar type brush shredders; Underground laborers, including caisson bellower

GROUP 3: Buggymobile; Concrete cutting torch; Concrete cutting torch; Concrete pile cutter; Driller, jackhammer, 2 1/2 feet drill steel or longer; Dri Pak-it machine; High sealer (including drilling of same); Hydro seeder and similar type; Impact wrench, mult-plate; Kettlemen, potmen and mean applying asphalt, lay-kold, creosote, line caustic and similar type materials (applying means applying, dipping, brushing or handling of such materials for pipe

wrapping and waterproofing); Operators of pneumatic, gas, electric tools, vibratring machines, pavement breakers, air blasting, come-along, and similar mechanical tools not separately classified herein; Pipelayers back up man coating, grouting, making of joints, sealing, caulking, diapering and including rubber gasket joints, pointing and any and all other services; Rotary Scarifier or multiple head concrete chipping scaarifier; Steel header board man and guideline setter; Tampers, Barko, Wacker and similar type; Trenching machine, handpropelled

GROUP 4: Asphalt raker, luterman, ironer, apshalt dumpman and asphalt spreader boxes (all types); Concrete core cutter (walls, floors or ceilings), Grinder or sander; Concrete saw man; cutting walls or flat work, scoring old or new concrete; Cribber, shorer, lagging, sheeting and trench bracing, hand-guided lagging hammer; Laser beam in connection with laborer's work; Oversize concrete vibrator operator 70 pounds and over; Pipelayer performing all services in the laying, installation and all forms of connection of pipe from the point of receiving pipe in the ditch until completion of oepration, including any and all forms of tubular material, whether pipe, metallic or non-metallic, conduit, and any other stationary type of tubular device used for the conveying of any substance or element, whether water, sewage, solid, gas, air or other product whatsoever and without regard to the nature of material from which the tubular material is fabricated; No joint pipe and stripping of same; Prefabricated manhole installer; Sandblaster (nozzleman), Porta shot-blast, water blasting

GROUP 5: Blasters Powderman-All work of loading holes, placing and blasting of all pwder and explosives of whatever type, regardless of method used for such loading and placing; Driller-all power drills, excluding jackhammer, whether core, diamond, wagon, track, multiple unit, and any and all other types of mechanical drills without regard to the form of motive power.

LABO0089-002 11/01/2019

	Rates	Fringes
LABORER (MASON TENDER)	\$ 32.00	18.28

LABO0089-004 07/01/2019

HEAVY AND HIGHWAY CONSTRUCTION

	Rates	Fringes
Laborers:		
Group 1.....	\$ 34.04	19.54
Group 2.....	\$ 34.50	19.54
Group 3.....	\$ 34.91	19.54

	Rates	Fringes
Group 4.....	\$ 35.75	19.54
Group 5.....	\$ 39.02	19.54

LABORER CLASSIFICATIONS

GROUP 1: Laborer: General or Construction Laborer, Landscape Laborer. Asphalt Rubber Material Loader. Boring Machine Tender (outside), Carpenter Laborer (cleaning, handling, oiling & blowing of panel forms and lumber), Concrete Laborer, Concrete Screeding for rough strike-off, Concrete water curing. Concrete Curb & Gutter laborer, Certified Confined Space Laborer, Demolition laborer & Cleaning of Brick and lumber, Expansion Joint Caulking; Environmental Remediation, Monitoring Well, Toxic waste and Geotechnical Drill tender, Fine Grader, Fire Watcher, Limbers, Brush Loader, Pilers and Debris Handlers. flagman. Gas Oil and Water Pipeline Laborer. Material Hoseman (slabs, walls, floors, decks); Plugging, filling of shee bolt holes; Dry packing of concrete and patching; Post Holer Digger (manual); Railroad maintenance, repair trackman, road beds; Rigging & signaling; Scaler, Slip-Form Raisers, Filling cracks on any surface, tool Crib or Tool House Laborer, Traffic control (signs, barriers, barricades, delineator, cones etc.), Window Cleaner

GROUP 2: Asphalt abatement; Buggymobile; Cement dumper (on 1 yd. or larger mixers and handling bulk cement); Concrete curer, impervious membrane and form oiler; Chute man, pouring concrete; Concrete cutting torch; Concrete pile cutter; driller/Jackhammer, with drill steel 2 1/2 feet or longer; Dry pak-it machine; Fence erector; Pipeline wrapper, gas, oil, water, pot tender & form man; Grout man; Installation of all asphalt overlay fabric and materials used for reinforcing asphalt; Irrigation laborer; Kettleman-Potman hot mop, includes applying asphalt, lay-klold, creosote, lime caustic and similar tyhpes of materials (dipping, brushing, handling) and waterproofing; Membrane vapor barrier installer; Pipelayer backup man (coating, grouting, making of joints, sealing caulkiing, diapering including rubber basket joints, pointing); Rotary scarifier, multiple head concrete chipper; Rock slinger; Roto scraper & tiller; Sandblaster pot tender; Septic tank digger/installer; Tamper/wacker operator; Tank scaler & cleaner; Tar man & mortar man; Tree climber/faller, chainb saw operator, Pittsburgh chipper & similar type brush shredders.

GROUP 3: Asphalt, installation of all frabrics; Buggy Mobile Man, Bushing hammer; Compactor (all types), Concrete Curer - Impervious membrane, Form Oiler, Concrete Cutting Torch, Concrete Pile Cutter, Driller/Jackhammer with drill steel 2 1/2 ft or longer, Dry Pak-it machine, Fence erector including manual post hole digging, Gas oil or water Pipeline Wrapper - 6 ft pipe and over, Guradrail erector, Hydro seeder, Impact Wrench man (multi plate), kettleman-Potman Hot Mop includes applying Asphalt, Lay-Kold, Creosote, lime caustic and similar types of materials (dipping, brushing or handling) and

waterproofing. Laser Beam in connection with Laborer work. High Scaler, Operators of Pneumatic Gas or Electric Tools, Vibrating Machines, Pavement Breakers, Air Blasting, Come-Alongs and similar mechanical tools, Remote-Controlled Robotic Tools in connection with Laborers work. Pipelayer Backup Man (Coating, grouting, making of joints, sealing, caulking, diapering including rubber gasket joints, pointing and other services). Power Post Hole Digger, Rotary Scarifier (multiple head concrete chipper scarifier), Rock Slinger, Shot Blast equipment (8 to 48 inches), Steel Headerboard Man and Guideline Setter, Tamper/Wacker operator and similar types, Trenching Machine hand propelled.

GROUP 4: Any worker exposed to raw sewage. Asphalt Raker, Luteman, Asphalt Dumpman, Asphalt Spreader Boxes, Concrete Core Cutter, Concrete Saw Man, Cribber, Shorer, Head Rock Slinger. Installation of subsurface instrumentation, monitoring wells or points, remediation system installer; Laborer, asphalt-rubber distributor bootman; Oversize concrete vibrator operators, 70 pounds or over. Pipelayer, Prefabricated Manhole Installer, Sandblast Nozzleman (Water Blasting-Porta Shot Blast), Traffic Lane Closure.

GROUP 5: Blasters Powderman-All work of loading holes, placing and blasting of all powder and explosives of whatever type, regardless of method used for such loading and placing; Horizontal directional driller, Boring system, Electronic tracking, Driller: all power drills excluding jackhammer, whether core, diamond, wagon, track, multiple unit, and all other types of mechanical drills without regard to form of motive power. Environmental remediation, Monitoring well, Toxic waste and Geotechnical driller, Toxic waste removal. Welding in connection with Laborer's work.

LABO0300-005 01/01/2018

	Rates	Fringes
Asbestos Removal Laborer.....	\$ 33.19	17.78

SCOPE OF WORK: Includes site mobilization, initial site cleanup, site preparation, removal of asbestos-containing material and toxic waste, encapsulation, enclosure and disposal of asbestos- containing materials and toxic waste by hand or with equipment or machinery; scaffolding, fabrication of temporary wooden barriers and assembly of decontamination stations.

LABO0345-001 07/01/2019

	Rates	Fringes
LABORER (GUNITE)		
GROUP 1.....	\$ 44.05	18.42

	Rates	Fringes
GROUP 2.....	\$ 43.10	18.42
GROUP 3.....	\$ 39.56	18.42

FOOTNOTE: GUNITE PREMIUM PAY: Workers working from a Bosn'n's Chair or suspended from a rope or cable shall receive 40 cents per hour above the foregoing applicable classification rates. Workers doing gunite and/or shotcrete work in a tunnel shall receive 35 cents per hour above the foregoing applicable classification rates, paid on a portal-to-portal basis. Any work performed on, in or above any smoke stack, silo, storage elevator or similar type of structure, when such structure is in excess of 75'-0" above base level and which work must be performed in whole or in part more than 75'-0" above base level, that work performed above the 75'-0" level shall be compensated for at 35 cents per hour above the applicable classification wage rate.

GUNITE LABORER CLASSIFICATIONS

GROUP 1: Rodmen, Nozzlemen

GROUP 2: Gunmen

GROUP 3: Reboundmen

LABO1184-001 07/01/2019

	Rates	Fringes
Laborers: (HORIZONTAL DIRECTIONAL DRILLING)		
(1) Drilling Crew Laborer...	\$ 36.70	15.05
(2) Vehicle Operator/Hauler.	\$ 36.87	15.05
(3) Horizontal Directional Drill Operator.....	\$ 38.72	15.05
(4) Electronic Tracking Locator.....	\$ 40.72	15.05
Laborers: (STRIPING/SLURRY SEAL)		
GROUP 1.....	\$ 37.91	18.06
GROUP 2.....	\$ 39.21	18.06
GROUP 3.....	\$ 41.22	18.06
GROUP 4.....	\$ 42.96	18.06

LABORERS - STRIPING CLASSIFICATIONS

GROUP 1: Protective coating, pavement sealing, including repair and filling of cracks by any method on any surface in parking lots, game courts and playgrounds; carstops; operation of all related machinery and equipment; equipment repair technician

GROUP 2: Traffic surface abrasive blaster; pot tender - removal of all traffic lines and markings by any method (sandblasting, waterblasting, grinding, etc.) and

preparation of surface for coatings. Traffic control person: controlling and directing traffic through both conventional and moving lane closures; operation of all related machinery and equipment

GROUP 3: Traffic delineating device applicator: Layout and application of pavement markers, delineating signs, rumble and traffic bars, adhesives, guide markers, other traffic delineating devices including traffic control. This category includes all traffic related surface preparation (sandblasting, waterblasting, grinding) as part of the application process. Traffic protective delineating system installer: removes, relocates, installs, permanently affixed roadside and parking delineation barricades, fencing, cable anchor, guard rail, reference signs, monument markers; operation of all related machinery and equipment; power broom sweeper

GROUP 4: Striper: layout and application of traffic stripes and markings; hot thermo plastic; tape traffic stripes and markings, including traffic control; operation of all related machinery and equipment

LABO1414-003 08/07/2019

	Rates	Fringes
LABORER		
PLASTER CLEAN-UP LABORER....	\$ 34.82	20.02
PLASTER TENDER.....	\$ 37.37	20.02

Work on a swing stage scaffold: \$1.00 per hour additional.

Work at Military Bases - \$3.00 additional per hour:
 Coronado Naval Amphibious Base, Fort Irwin, Marine Corps Air Station-29 Palms, Imperial Beach Naval Air Station, Marine Corps Logistics Supply Base, Marine Corps Pickle Meadows, Mountain Warfare Training Center, Naval Air Facility-Seeley, North Island Naval Air Station, Vandenberg AFB.

PAIN0036-001 07/01/2019

	Rates	Fringes
Painters: (Including Lead Abatement)		
(1) Repaint (excludes San Diego County).....	\$ 28.59	15.97
	Rates	Fringes
(2) All Other Work.....	\$ 32.12	16.09

REPAINT of any previously painted structure. Exceptions:
work involving the aerospace industry, breweries, commercial
recreational facilities, hotels which operate commercial
establishments as part of hotel service, and sports facilities.

PAIN0036-010 10/01/2019

	Rates	Fringes
DRYWALL FINISHER/TAPER		
(1) Building & Heavy Construction.....	\$ 35.69	17.10
(2) Residential Construction (Wood frame apartments, single family homes and multi-duplexes up to and including four stories).....	\$ 25.11	17.06

PAIN0036-012 01/01/2020

	Rates	Fringes
GLAZIER.....	\$ 44.55	17.06

PAIN0036-019 01/01/2020

	Rates	Fringes
SOFT FLOOR LAYER.....	\$ 32.27	17.24

PLAS0200-005 08/07/2019

	Rates	Fringes
PLASTERER.....	\$ 43.73	16.03

NORTH ISLAND NAVAL AIR STATION, COLORADO NAVAL AMPHIBIOUS
BASE, IMPERIAL BEACH NAVAL AIR STATION: \$3.00 additional
per hour.

PLAS0500-001 07/01/2018

	Rates	Fringes
CEMENT MASON/CONCRETE FINISHER		
GROUP 1.....	\$ 26.34	21.12
GROUP 2.....	\$ 27.99	21.12
GROUP 3.....	\$ 30.07	21.12

CEMENT MASONS - work inside the building line, meeting the following criteria:

GROUP 1: Residential wood frame project of any size; work classified as Type III, IV or Type V construction; interior tenant improvement work regardless the size of the project; any wood frame project of four stories or less.

GROUP 2: Work classified as type I and II construction

GROUP 3: All other work

PLUM0016-006 09/01/2018

	Rates	Fringes
PLUMBER, PIPEFITTER, STEAMFITTER		
Camp Pendleton.....	\$ 54.63	22.16
Plumber and Pipefitter All other work except work on new additions and remodeling of bars, restaurant, stores and commercial buildings not to exceed 5,000 sq. ft. of floor space and work on strip malls, light commercial, tenant improvement and remodel work.....	\$ 50.13	22.16
Work ONLY on new additions and remodeling of commercial buildings, bars, restaurants, and stores not to exceed 5,000 sq. ft. of floor space.....	\$ 48.58	21.18
Work ONLY on strip malls, light commercial, tenant improvement and remodel work.....	\$ 37.10	19.51

PLUM0016-011 09/01/2018

	Rates	Fringes
PLUMBER/PIPEFITTER Residential.....	\$ 40.23	18.08

PLUM0345-001 09/01/2019

	Rates	Fringes
PLUMBER Landscape/Irrigation Fitter.	\$ 34.40	23.05
Sewer & Storm Drain Work....	\$ 34.40	23.05

ROOF0045-001 07/01/2019

	Rates	Fringes
ROOFER.....	\$ 34.25	9.10

* SFCA0669-001 04/01/2020

	Rates	Fringes
SPRINKLER FITTER.....	\$ 41.57	24.10

SHEE0206-001 07/01/2019

	Rates	Fringes
SHEET METAL WORKER		
Camp Pendleton.....	\$ 40.94	28.51
Except Camp Pendleton.....	\$ 38.94	28.51
Sheet Metal Technician.....	\$ 29.25	8.87

SHEET METAL TECHNICIAN - SCOPE:

a. Existing residential buildings, both single and multi-family, where each unit is heated and/or cooled by a separate system b. New single family residential buildings including tracts. c. New multi-family residential buildings, not exceeding five stories of living space in height, provided each unit is heated or cooled by a separate system. Hotels and motels are excluded. d. LIGHT COMMERCIAL WORK: Any sheet metal, heating and air conditioning work performed on a project where the total construction cost, excluding land, is under \$1,000,000 e. TENANT IMPROVEMENT WORK: Any work necessary to finish interior spaces to conform to the occupants of commercial buildings, after completion of the building shell

TEAM0166-001 09/01/2019

	Rates	Fringes
Truck drivers:		
GROUP 1.....	\$ 18.90	34.69
GROUP 2.....	\$ 26.49	34.69
GROUP 3.....	\$ 26.69	34.69
GROUP 4.....	\$ 26.89	34.69
GROUP 5.....	\$ 27.09	34.69
GROUP 6.....	\$ 27.59	34.69
GROUP 7.....	\$ 29.09	34.69

FOOTNOTE: HAZMAT PAY: Work on a hazmat job, where hazmat certification is required, shall be paid, in addition to the classification working in, as follows: Levels A, B and C - +\$1.00 per hour. Workers shall be paid hazmat pay in increments of four (4) and eight (8) hours.

TRUCK DRIVER CLASSIFICATIONS

GROUP 1: Fuel Man, Swamper

GROUP 2: 2-axle Dump Truck, 2-axle Flat Bed, Concrete Pumping Truck, Industrial Lift Truck, Motorized Traffic Control, Pickup Truck on Jobsite

GROUP 3: 2-axle Water Truck, 3-axle Dump Truck, 3-axle Flat Bed, Erosion Control Nozzleman, Dump Crete Truck under 6.5 yd, Forklift 15,000 lbs and over, Prell Truck, Pipeline Work Truck Driver, Road Oil Spreader, Cement Distributor or Slurry Driver, Bootman, Ross Carrier

GROUP 4: Off-road Dump Truck under 35 tons 4-axles but less than 7-axles, Low-Bed Truck & Trailer, Transit Mix Trucks under 8 yd, 3-axle Water Truck, Erosion Control Driver, Grout Mixer Truck, Dump Crete 6.5yd and over, Dumpster Trucks, DW 10, DW 20 and over, Fuel Truck and Dynamite, Truck Greaser, Truck Mounted Mobile Sweeper 2-axle Winch Truck

GROUP 5: Off-road Dump Truck 35 tons and over, 7-axles or more, Transit Mix Trucks 8 yd and over, A-Frame Truck, Swedish Cranes

GROUP 6: Off-Road Special Equipment (including but not limited to Water Pull Tankers, Athey Wagons, DJB, B70 Wuclids or like Equipment)

GROUP 7: Repairman

WELDERS - Receive rate prescribed for craft performing operation to which welding is incidental.

=====

Note: Executive Order (EO) 13706, Establishing Paid Sick Leave for Federal Contractors applies to all contracts subject to the Davis-Bacon Act for which the contract is awarded (and any solicitation was issued) on or after January 1, 2017. If this contract is covered by the EO, the contractor must provide employees with 1 hour of paid sick leave for every 30 hours they work, up to 56 hours of paid sick leave each year. Employees must be permitted to use paid sick leave for their own illness, injury or other health-related needs, including preventive care; to assist a family member (or person who is like family to the employee) who is ill, injured, or has other health-related needs, including preventive care; or for reasons resulting from, or to assist a family member (or person who is like family to the employee) who is a victim of, domestic violence, sexual assault, or stalking. Additional information on contractor requirements and worker protections under the EO is available at www.dol.gov/whd/govcontracts.

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29CFR 5.5 (a) (1) (ii)).

The body of each wage determination lists the classification and wage rates that have been found to be prevailing for the cited type(s) of construction in the area covered by the wage determination. The classifications are listed in alphabetical order of "identifiers" that indicate whether the particular rate is a union rate (current union negotiated rate for local), a survey rate (weighted average rate) or a union average rate (weighted union average rate).

Union Rate Identifiers

A four letter classification abbreviation identifier enclosed in dotted lines beginning with characters other than "SU" or "UAVG" denotes that the union classification and rate were prevailing for that classification in the survey. Example: PLUM0198-005 07/01/2014. PLUM is an abbreviation identifier of the union which prevailed in the survey for this classification, which in this example would be Plumbers. 0198 indicates the local union number or district council number where applicable, i.e., Plumbers Local 0198. The next number, 005 in the example, is an internal number used in processing the wage determination. 07/01/2014 is the effective date of the most current negotiated rate, which in this example is July 1, 2014.

Union prevailing wage rates are updated to reflect all rate changes in the collective bargaining agreement (CBA) governing this classification and rate.

Survey Rate Identifiers

Classifications listed under the "SU" identifier indicate that no one rate prevailed for this classification in the survey and the published rate is derived by computing a weighted average rate based on all the rates reported in the survey for that classification. As this weighted average rate includes all rates reported in the survey, it may include both union and non-union rates. Example: SULA2012-007 5/13/2014. SU indicates the rates are survey rates based on a weighted average calculation of rates and are not majority rates. LA indicates the State of Louisiana. 2012 is the year of survey on which these classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the

wage determination. 5/13/2014 indicates the survey completion date for the classifications and rates under that identifier.

Survey wage rates are not updated and remain in effect until a new survey is conducted.

Union Average Rate Identifiers

Classification(s) listed under the UAVG identifier indicate that no single majority rate prevailed for those classifications; however, 100% of the data reported for the classifications was union data. EXAMPLE: UAVG-OH-0010 08/29/2014. UAVG indicates that the rate is a weighted union average rate. OH indicates the state. The next number, 0010 in the example, is an internal number used in producing the wage determination. 08/29/2014 indicates the survey completion date for the classifications and rates under that identifier.

A UAVG rate will be updated once a year, usually in January of each year, to reflect a weighted average of the current negotiated/CBA rate of the union locals from which the rate is based.

WAGE DETERMINATION APPEALS PROCESS

1.) Has there been an initial decision in the matter? This can be:

- * an existing published wage determination
- * a survey underlying a wage determination
- * a Wage and Hour Division letter setting forth a position on a wage determination matter
- * a conformance (additional classification and rate) ruling

On survey related matters, initial contact, including requests for summaries of surveys, should be with the Wage and Hour Regional Office for the area in which the survey was conducted because those Regional Offices have responsibility for the Davis-Bacon survey program. If the response from this initial contact is not satisfactory, then the process described in 2.) and 3.) should be followed.

With regard to any other matter not yet ripe for the formal process described here, initial contact should be with the Branch of Construction Wage Determinations. Write to:

Branch of Construction Wage Determinations
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

2.) If the answer to the question in 1.) is yes, then an interested party (those affected by the action) can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Write to:

Wage and Hour Administrator
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and by any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3.) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

4.) All decisions by the Administrative Review Board are final.

=====

END OF GENERAL DECISION"

10. SECTION 3 OF THE HOUSING AND URBAN DEVELOPMENT ACT OF 1968:

- 10.1.** The work to be performed under this contract is on a project assisted under a program providing direct Federal financial assistance from the Department of Housing and Urban Development and is subject to the requirements of Section 3 of the Housing and Urban Development Act of 1968, as amended, 12 U.S.C. 1701u. Section 3 requires that to the greatest extent feasible opportunities for training and employment be given lower income residents of the project area and contracts for work in connection with the project be awarded to business concerns which are located in or owned in substantial part by persons residing in the area of the project.
- 10.2.** The parties to this contract will comply with the provisions of said Section 3 and the regulations issued pursuant thereto by the Secretary of Housing and Urban Development set forth in 24 CFR Part 135, and all applicable rules and orders of the Department issued thereunder prior to the execution of this contract. The parties to this contract certify and agree that they are under no contractual or other disability which would prevent them from complying with these requirements.
- 10.3.** The Contractor will send to each labor organization or representative of workers with which he has a collective bargaining agreement or other contract or understanding, if any, a notice advising the said labor organization or workers' representative of his commitments under this Section 3 clause and shall post copies of the notice in conspicuous places available to employees and applicants for employment or training.
- 10.4.** The Contractor will include this Section 3 clause in every subcontract for work in connection with the project and will, at the direction of the applicant for or recipient of Federal financial assistance, take appropriate action pursuant to the subcontract upon a finding that the Subcontractor is in violation of regulations issued by the Secretary of Housing and Urban Development, 24 CFR Part 135. The Contractor will not subcontract with any Subcontractor where it has notice or knowledge that the latter has been found in violation of regulations under 24 CFR Part 135 and will not let any subcontract unless the Subcontractor has first provided it with a preliminary statement of ability to comply with the requirements of these regulations.
- 10.5.** Compliance with the provisions of Section 3, the regulations set forth in 24 CFR Part 135, and all applicable rules and orders of the Department issued thereunder prior to the execution of the contract, shall be a condition of the Federal financial assistance provided to the project, binding upon the applicant or recipient for such assistance, its successors and assigns. Failure to fulfill these requirements shall subject the applicant or recipient, its Contractors and Subcontractors, its successors, and assigns to those sanctions specified by the grant or loan agreement or contract through which Federal assistance is provided, and to such sanctions as are specified by 24 CFR Part 135.

11. FEDERAL LABOR STANDARDS PROVISIONS:

APPLICABILITY: The Project or Program to which the construction work covered by this contract pertains is being assisted by the United States of America and the following Federal Labor Standards Provisions (Office of the Secretary of Labor 29 CFR 5) are included in this Contract pursuant to the provisions applicable to such Federal assistance.

SECTION A.

1. Minimum Wages.

- (i) All laborers and mechanics employed or working upon the site of the work, (or under the United States Housing Act of 1937 or under the Housing Act of 1949 in the construction or development of the project) will be paid unconditionally and not less often than once a week, and without subsequent deduction or rebate on any account (except such payroll deductions as are permitted by regulations issued by the Secretary of Labor under the Copeland Act (29 CFR Part 3), the full amount of wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment computed at rates not less than those contained in the wage determination of the Secretary of Labor which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the contractor and such laborers and mechanics.

Contributions made or costs reasonably anticipated for bona fide fringe benefits under Section I(b)(2) of the Davis-Bacon Act on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions of 29 CFR 5.5(a)(1)(iv); also, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs, which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics shall be paid the appropriate wage rate and fringe benefits on the wage determination for the classification of work actually performed, without regard to skill, except as provided in 29 CFR 5.5(a)(4). Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein: Provided that the employer's payroll records accurately set forth the time spent in each classification in which work is performed. The wage determination (including any additional classification and wage rates conformed under 29 CFR 5.5(a)(1)(ii) and the Davis-Bacon poster (WH-1321) shall be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible, place where it can be easily seen by the workers.

- (ii) (a) Any class of laborers or mechanics, including helpers, which is not listed in the wage determination and which is to be employed under the contract shall be classified in conformance with the wage determination. The Federal Agency or its designee shall approve an additional classification and wage rate and fringe benefits therefore only when the following criteria have been met:
 - (1) The work to be performed by the classification requested is not performed by a classification in the wage determination; and

- (2)** The classification is utilized in the area by the construction industry; and
- (3)** The proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination
- (b)** If the contractor and the laborers and mechanics to be employed in the classification (if known), or their representatives, and the contracting officer or its designee agree on the classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken shall be sent by the contracting officer to the Administrator of the Wage and Hour Division, Employment Standards Administration, U.S. Department of Labor, Washington, D.C. 20210. The Administrator, or an authorized representative, will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.
- (c)** In the event the contractor, the laborers or mechanics to be employed in the classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer shall refer the questions, including the views of all interested parties and the recommendation of the contracting officer, to the Administrator for determination. The Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.
- (d)** The wage rate (including fringe benefits where appropriate) determined pursuant to subparagraphs (1)(ii)(b) or (c) of this section, shall be paid to all workers performing work in the classification under this contract from the first day on which work is performed in the classification.
- (iii)** Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor shall either pay the benefit as stated in the wage determination or shall pay another bona fide fringe benefit or an hourly cash equivalent thereof.
- (iv)** If the contractor does not make payments to a trustee or other third person, the contractor may consider as part of the wages of any laborer or mechanic the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program, Provided, That the Secretary of Labor has found, upon the written request of the contractor, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

2. Withholding.

The Federal Agency or its designee shall upon its own action or upon written request of an authorized representative of the Department of Labor withhold or cause to be withheld from the contractor under this contract or any other Federal contract with the same prime contractor, or any other Federally-assisted contract subject to Davis-Bacon prevailing wage requirements, which is held by the same prime contractor so much of the accrued payments or advances as may be considered necessary to pay laborers and mechanics, including apprentices, trainees and helpers, employed by the contractor or any subcontractor the full amount of wages required by the contract. In the event of failure to pay any laborer or mechanic, including any apprentice, trainee or helper, employed or working on the site of the work (or under the United States Housing Act of 1937 or under the Housing Act of 1949 in the construction or development of the project), all or part of the wages required by the contract, the Federal Agency or its designee may, after written notice to the contractor, sponsor, applicant, or owner, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

3. Payrolls and Basic Records.

- (i) Payrolls and basic records relating thereto shall be maintained by the contractor during the course of the work preserved for a period of 3 years thereafter for all laborers and mechanics working at the site of the work (or under the United States Housing Act of 1937 or under the Housing Act of 1949 in the construction or development of the project. Such records shall contain the name, address, and social security number of each such worker, his or her correct classification, hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalents thereof of the types described in Section I(b)(2)(B) of the Davis-bacon Act), daily and weekly number of hours worked, deductions made and actual wages paid. Whenever the Secretary of Labor has found under 29 CFR 5.5 (a)(1)(iv) that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in Section I(b)(2)(B) of the Davis-Bacon Act, the contractor shall maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, and that the plan or program has been communicated in writing to the laborers or mechanics affected, and records which show the costs anticipated or the actual cost incurred in providing such benefits. Contractors employing apprentices or trainees under approved programs shall maintain written evidence of the registration of apprenticeship programs and certification of trainee programs, the registration of the apprentices and trainees, and the ratios and wage rates prescribed in the applicable programs.
- (ii) (a) The contractor shall submit weekly for each week in which any contract work is performed a copy of all payrolls to the Federal Agency or its designee if the agency is a party to the contract, but if the agency is not such a party, the contractor will submit the payrolls to the applicant sponsor, or owner, as the case may be, for transmission to the Federal Agency or its designee. The payrolls submitted shall set out accurately and completely all of the information required to be maintained under 29 CFR 5.5(a)(3)(i) except that full social security numbers and home addresses shall not be included on weekly transmittals. Instead the payrolls shall only need to include an individually identifying number for each employee (e.g., the last four digits of the employee's social security number). The required weekly payroll information may be submitted in any form desired.

Optional Form WH-347 is available for this purpose from the Wage and Hour Division Web site at <https://www.dol.gov/whd/forms/wh347.pdf> or its successor site. The prime contractor is responsible for the submission of copies of payrolls by all subcontractors.

Contractors and subcontractors shall maintain the full social security number and current address of each covered worker, and shall provide them upon request to the Federal Agency or its designee if the agency is a party to the contract, but if the agency is not such a party, the contractor will submit the payrolls to the applicant sponsor, or owner, as the case may be, for transmission to the Federal Agency, the contractor, or the Wage and Hour Division of the Department of Labor for purposes of an investigation or audit of compliance with prevailing wage requirements. It is not a violation of this subparagraph for a prime contractor to require a subcontractor to provide addresses and social security numbers to the prime contractor for its own records, without weekly submission to the sponsoring government agency (or the applicant, sponsor, or, owner).

(b) Each payroll submitted shall be accompanied by a "Statement of Compliance," signed by the contractor or subcontractor or his or her agent who pays or supervises the payment of the persons employed under the contract and shall certify the following:

- (1)** That the payroll for the payroll period contains the information required to be provided under 29 CFR 5.5 (a)(3)(ii), the appropriate information is being maintained under 29 CFR 5.5(a)(3)(i), and that such information is correct and complete;
 - (2)** That each laborer or mechanic (including each helper, apprentice, and trainee) employed on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in 29 CFR Part 3;
 - (3)** That each laborer or mechanic has been paid not less than the applicable wage rates and fringe benefits or cash equivalents for the classification of work performed, as specified in the applicable wage determination incorporated into the contract.
- (c)** The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH-347 shall satisfy the requirement for submission of the "Statement of Compliance" required by subparagraph A.3.(ii)(b) of this section.
 - (d)** The falsification of any of the above certifications may subject the contractor or subcontractor to civil or criminal prosecution under Section 1001 of Title 18 and Section 231 of Title 31 of the United States Code.

- (iii) The contractor or subcontractor shall make the records required under subparagraph A.3.(i) of this section available for inspection, copying, or transcription by authorized representatives of the Federal Agency or its designee or the Department of Labor, and shall permit such representatives to interview employees during working hours on the job. If the contractor or subcontractor fails to submit the required records or to make them available, Federal agency or its designee may, after written notice to the contractor, sponsor, applicant or owner, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available may be grounds for debarment action pursuant to 29 CFR 5.12.

4. **Apprentices and Trainees.**

- (i) **Apprentices.** Apprentices will be permitted to work at less than the predetermined rate for the work they performed when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the U.S. Department of Labor, Employment and Training Administration, Office of Apprenticeship Training, Employer and Labor Services, or with a State Apprenticeship Agency recognized by the Office, or if a person is employed in his or her first 90 days of probationary employment as an apprentice in such an apprenticeship program, who is not individually registered in the program, but who has been certified by the Office of Apprenticeship Training, Employer and Labor Services or a State Apprenticeship Agency (where appropriate) to be eligible for probationary employment as an apprentice. The allowable ratio of apprentices to journeymen on the job site in any craft classification shall not be greater than the ratio permitted to the contractor as to the entire work force under the registered program. Any worker listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated above, shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. Where a contractor is performing construction on a project in a locality other than that in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyman's hourly rate) specified in the contractor's or subcontractor's registered program shall be observed. Every apprentice must be paid at not less than the rate specified in the registered program for the apprentice's level of progress, expressed as a percentage of the journeymen hourly rate specified in the applicable wage determination.

Apprentices shall be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator determines that a different practice prevails for the applicable apprentice classification, fringes shall be paid in accordance with that determination. In the event the Office of Apprenticeship Training, Employer and Labor Services, or a State Apprenticeship Agency recognized by the Office, withdraws approval of an apprenticeship program, the contractor will no longer be permitted to utilize apprentices at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

- (ii) **Trainees.** Except as provided in 29 CFR 5.16, trainees will not be permitted to work at less than the predetermined rate for the work performed unless they are employed pursuant 'to and individually registered in a program which has received prior approval, evidenced by formal certification by the U.S. Department of Labor, Employment and Training Administration. The ratio of trainees to journeymen on the job site shall not be greater than permitted under the plan approved by the Employment and Training Administration. Every trainee must be paid at not less than the rate specified in the approved program for the trainee's level of progress, expressed as a percentage of the journeyman hourly rate specified in the applicable wage determination. Trainees shall be paid fringe benefits in accordance with the provisions of the trainee program. If the trainee program does not mention fringe benefits, trainees shall be paid the full amount of fringe benefits listed on the wage determination unless the Administrator of the Wage and Hour Division determines that there is an apprenticeship program associated with the corresponding journeyman wage rate on the wage determination which provides for less than full fringe benefits for apprentices. Any employee listed on the payroll at a trainee rate who is not registered and participating in a training plan approved by the Employment and Training Administration shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. In addition, any trainee performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. In the event the Employment and Training Administration withdraws approval of a training program, the contractor will no longer be permitted to utilize trainees at less than the applicable predetermined rate for the work performed until an acceptable program is approved.
- (iii) **Equal Employment Opportunity.** The utilization of apprentices, trainees and journeymen under 29 CFR Part 5 shall be in conformity with the equal employment opportunity requirements of Executive Order 11246, as amended, and 29 CFR Part 30.

5. Compliance with Copeland Act Requirements.

The contractor shall comply with the requirements of 29 CFR Part 3 which are incorporated by reference in this contract.

6. Subcontracts.

The contractor or subcontractor will insert in any subcontracts the clauses contained in 29 CFR 5.59(a)(1) through (10 and such other clauses as the Federal Agency may by appropriate instructions require, and a copy of the applicable prevailing wage decision, and also a clause requiring the subcontractors to include these clauses in any lower tier subcontracts. The prime contractor shall be responsible for the compliance by any subcontractor or lower tier subcontractor with all the contract clauses in 29 CFR 5.5.

7. Contract Termination; Debarment.

A breach of the contract clauses in 29 CFR 5.5 may be grounds for termination of the contract and for debarment as a contractor and a subcontractor as provided in 29 CFR 5.12.

8. Compliance with Davis-Bacon and Related Act Requirements.

All rulings and interpretations of the Davis-Bacon and Related Acts contained in 29 CFR Parts 1, 3, and 5 are herein incorporated by reference in this contract.

9. Disputes Concerning Labor Standards.

Disputes arising out of the labor standards provisions of this contract shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the Department of Labor set forth in 29 CFR Parts 5, 6, and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the U.S. Department of Labor, or the employees or their representatives.

10. Certification of Eligibility.

- (i) Certification of Eligibility. By entering into this contract the contractor certifies that neither it (nor he or she) nor any person or firm who has an interest in the contractor's firm is a person or firm ineligible to be awarded Government contracts by virtue of Section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).
- (ii) No part of this contract shall be subcontracted to any person or firm ineligible for award of a Government contract by virtue of Section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1)..
- (iii) The penalty for making false statements is prescribed in the U.S. Criminal Code, 18 U.S.C. 1001.

SECTION B. The provisions of this section B are applicable where the amount of the prime contract exceeds \$100,000. As used in this paragraph, the terms "laborers" and "mechanics" include watchmen and guards.

1. Contract Work Hours and Safety Standards Act.

- (i) **Overtime requirements.** No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any such laborer or mechanic in any workweek in which the individual is employed on such work to work in excess of 40 hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of 40 hours in such workweek.
- (ii) **Violation; Liability For Unpaid Wages; Liquidated Damages.** In the event of any violation of the clause set forth in subparagraph (B)(1)(i) of this section, the contractor and any subcontractor responsible therefore shall be liable for the unpaid wages. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory), for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer or mechanic, including watchmen and guards, employed in violation of the clause set forth in subparagraph (B)(1)(i) of this paragraph, in the sum of \$10 for each calendar day on which such individual was required or permitted to work in excess of the standard workweek of 40 hours without payment of the overtime wages required by the clause set forth in sub paragraph (B)(1)(i) of this section.

- (iii) **Withholding For Unpaid Wages And Liquidated Damages.** The Federal Agency or its designee shall upon its own action or upon written request of an authorized representative of the Department of Labor withhold or cause to be withheld, from any moneys payable on account of work performed by the contractor or subcontractor under any such contract or any other Federal contract with the same prime contract, or any other Federally-assisted contract subject to the Contract Work Hours and Safety Standards Act which is held by the same prime contractor such sums as may be determined to be necessary to satisfy any liabilities of such contractor or subcontractor for unpaid wages and liquidated damages as provided in the clause set forth in subparagraph (B)(1)(ii) of this section.
 - (iv) **Subcontracts.** The contractor or subcontractor shall insert in any subcontracts the clauses set forth in subparagraphs (B)(1)(i) through (B)(1)(iv) of this section and also a clause requiring the subcontractors to include these clauses in any lower tier subcontracts. The prime contractor shall be responsible for compliance by any subcontractor or lower tier subcontractor with the clauses set forth in subparagraphs (B)(1)(i) through (B)(1)(iv) of this section.
2. In addition to the clauses contained in Section B, in any contract subject only to the Contract Work Hours and Safety Standards Act and not to any of the other statutes cited in 29 CFR 5.1, the Agency Head shall cause or require the contracting officer to insert a clause requiring that the contractor or subcontractor shall maintain payrolls and basic payroll records during the course of the work and shall preserve them for a period of three years from the completion of the contract for all laborers and mechanics, including guards and watchmen, working on the contract. Such records shall contain the name and address of each such employee, social security number, correct classifications, hourly rates of wages paid, daily and weekly number of hours worked, deductions made, and actual wages paid. Further, the Agency Head shall cause or require the contracting officer to insert in any such contract a clause providing that the records to be maintained under this paragraph shall be made available by the contractor or subcontractor for inspection, copying, or transcription by authorized representatives of the (write the name of agency) and the Department of Labor, and the contractor or subcontractor will permit such representatives to interview employees during working hours on the job.

SECTION C.

1. Compliance Verification.

- (i) The Recipient shall periodically interview a sufficient number of employees entitled to DB prevailing wages (covered employees) to verify that contractors or subcontractors are paying the appropriate wage rates. As provided in 29 CFR 5.6(a)(6), all interviews must be conducted in confidence. Use Standard Form 1445 (SF 1445) or equivalent documentation to memorialize the interviews. Copies of the SF 1445 are available from the funding agency upon request.
- (ii) The Recipient shall establish and follow an interview schedule based on its assessment of the risks of noncompliance with DB posed by contractors or subcontractors and the duration of the contract or subcontract. At a minimum, the Recipient should conduct interviews with a representative group of covered employees within two weeks of each

contractor or subcontractor's submission of its initial weekly payroll data and two weeks prior to the estimated completion date for the contract or subcontract. The Recipient must conduct more frequent interviews if the initial interviews or other information indicates that there is a risk that the contractor or subcontractor is not complying with DB. The Recipient shall immediately conduct necessary interviews in response to an alleged violation of the prevailing wage requirements. All interviews shall be conducted in confidence.

- (iii) The Recipient shall periodically conduct spot checks of a representative sample of weekly payroll data to verify that contractors or subcontractors are paying the appropriate wage rates. The Recipient shall establish and follow a spot check schedule based on its assessment of the risks of noncompliance with DB posed by contractors or subcontractors and the duration of the contract or subcontract. At a minimum, if practicable the Recipient shall spot check payroll data within two weeks of each contractor or subcontractor's submission of its initial payroll data and two weeks prior to the completion date the contract or subcontract. The Recipient must conduct more frequent spot checks if the initial spot check or other information indicates that there is a risk that the contractor or subcontractor is not complying with DB. In addition, during the examinations the Recipient shall verify evidence of fringe benefit plans and payments thereunder by contractors and subcontractors who claim credit for fringe benefit contributions.
- (iv) The Recipient shall periodically review contractors and subcontractors use of apprentices and trainees to verify registration and certification with respect to apprenticeship and training programs approved by either the U.S Department of Labor or a state, as appropriate, and that contractors and subcontractors are not using disproportionate numbers of, laborers, trainees and apprentices. These reviews shall be conducted in accordance with the schedules for spot checks and interviews described in subsection (ii) and (iii) above.
- (v) The Recipient must immediately report potential violations of the DB prevailing wage requirements to the funding agency DB contact listed above and to the appropriate DOL Wage and Hour District Office listed at <http://www.dol.gov/whd/america2.htm>.

12. AGENCY SPECIFIC PROVISIONS:

Note: Failure to comply with these specifications e.g., taking the specified steps prior to Bid opening and submitting the forms with the Bid, will lead to the Bid being declared **non-responsive** and, therefore, shall be rejected.

12.1. CDBG HUD Requirements:

12.1.1. Affirmative Good Faith Effort Steps shall include the steps listed at 24 CFR 85.36(e)(2), set forth below:

1. Placing qualified DBE business enterprises on solicitation lists;
2. Assuring that DBE business enterprises are solicited whenever they are potential sources;

3. Dividing total requirements, when economically feasible, into smaller tasks or quantities to permit maximum participation by DBE business enterprises;
4. Establishing delivery schedules, where the requirement permits, which encourage participation by DBE business enterprises;
5. Using the services and assistance of the Small Business Administration and the Minority Business Development Agency of the Department of Commerce; and
6. Requiring the Subcontractors to take the affirmative steps listed in this section.
7. See "DBE Potential Resources Centers" Section in these specifications. Include a completed copy of the form AA61, "List of Work Made Available" with the GFE documentation.

13. DBE POTENTIAL RESOURCES CENTERS:

- 13.1.** Utilization of US Small Business Administration and Minority Business Development Agency (MBDA) resources is required at no cost. These agencies offer several services, including Internet access to databases of DBEs.
- 13.2.** For additional assistance, the recipient or contractor can telephone the local offices of both agencies in their area (SBA Minority Enterprise Development Offices and DOC MBDA Regional Centers). The Internet web sites also include names, addresses, and phone or fax numbers of local SBA and MBDA centers. Do not write to these sources
- 13.3.** The Contractor shall provide documentation that the local SBA/MBDA offices or web sites were notified of the contracting bid opportunity at least 15 Working Days prior to Bid opening and solicitation to DBE subcontractors at least 10 Working Days prior to Bid opening. Documentation shall not only include the efforts to contact the information sources and list the Contract opportunity, but also the solicitation and response to the bid request.
- 13.4.** Include qualified DBEs on solicitation lists and record the information on Form AA63. Solicitation shall be as broad as possible.
- 13.5.** If DBE sources are not located, explain why and describe the efforts made.
- 13.6.** The Contractor shall send invitations to at least 3 (or all, if less than 3) DBE vendors for each item of work referred by sources contacted. The invitations shall adequately specify the items for which bids are requested. The record of "good faith" efforts shall indicate a real desire for a positive response, such as a certified mail receipt or a documented telephone conversation.

13.7. A regular letter or an unanswered telephone call is not an adequate "good faith" effort. A list of all sub-bidders, including the bidders not selected and non DBE Subcontractors, and bid amount for each item of the Work shall be submitted on Form AA62. If a low bid was not accepted, an explanation shall be provided.

13.8. Federal Agencies (must be contacted and solicitations posted on their websites):

Name and Address	Telephone and Web Site
U.S. Small Business Administration	(415) 744-6820 Extension 0
455 Market Street, Suite 600	Dynamic Small Business Search: http://dsbs.sba.gov/dsbs/search/dsp_dsbs.cfm ¹
San Francisco, CA 94105	Bid Notification: https://eweb1.sba.gov/subnet/common/dsp_login.cfm ²
RE: Minority Enterprise Development Offices	
U.S. Department of Commerce	(415) 744-7415
Minority Business Development Agency	Website:
555 Montgomery Street	http://www.mbda.gov/ ³
San Francisco, CA 94111	RE: Business Development Centers

13.9. State Agencies (must be contacted):

Name and Address	Telephone and Web Site
California Department of Transportation	Mailing Address: PO Box 942874
(CALTRANS) Business Enterprise Program ⁴	Sacramento, CA 94274-0015
1820 Alhambra Blvd.	(916) 227-9599
Sacramento, CA 95816	DBE Database: www.dot.ca.gov/hq/bep/find_certified.htm
CA Public Utilities Commission (CPUC) ⁵	
505 Van Ness Avenue	Directory: https://sch.thesupplierclearinghouse.com/FrontEnd/SearchCertifiedDirectory.asp
San Francisco, CA 94102-3298	

Notes:

1. The Contractor shall use the SBA's Dynamic Business Search database to search for potential subcontractors, suppliers, and/or manufacturers. Bidder must provide a copy of all search records for items of work made available with GFE documentation.
2. Contractor shall use SUB-Net to post subcontracting opportunities. Contractor shall post Subcontractor opportunities at least 15 Working Days prior to bid opening. Small businesses can review this web site to identify opportunities in their areas of expertise. The web site is designed primarily as a place for large businesses to post solicitations and notices. Bidder **must** provide copy of the Display Solicitation Record identifying the date solicitation notice was posted with GFE documentation.
3. Contractor may use MBDA web portal to post subcontracting opportunities. If utilized, the Contractor shall post subcontractor opportunities at least 30 Calendar Days prior to Bid opening. Small businesses can review this web site to identify opportunities in their areas of expertise. The web site is designed primarily as a place for large businesses to post solicitations and notices. Provide copy of the Offer Overview with the GFE documentation.
4. Based on the federal DBE program, CALTRANS maintains a database and provides directories of minority and woman-owned firms. Bidder must provide a copy of all search records for items of work made available with GFE documentation.
5. CPUC maintains a database of DBE-owned business enterprises and serves to inform the public. Bidder **must** provide a copy of all search records for items of work made available with GFE documentation.

14. GOOD FAITH EFFORT DOCUMENTATION SUBMITTALS:

14.1. The affirmative GFE steps documentation shall be submitted **within 4 Working Days after the Bid Opening**. If this documentation is not submitted when due, the City will declare the Bid non-responsive and reject it.

14.2. The required documentation shall be submitted and logged in at the following address:

CITY OF SAN DIEGO
PUBLIC WORKS CONTRACTS
525 B STREET, SUITE 750, (7TH FLOOR) MS 908A
SAN DIEGO, CA 92101
SUBJECT: AFFIRMATIVE GOOD FAITH EFFORT DOCUMENTATION
BID NO K-20-1888-DBB-3-A

14.3. The Contractor shall maintain the records documenting compliance with requirements including documentation of its GFE and data relied upon in formulating its fair share objectives.

15. FORMS:

15.1. The Contractor shall demonstrate that efforts were made to attract DBEs on this contract. The Contractor and Subcontractors shall take the steps listed in these specifications to assure that DBEs are used whenever possible as sources of supplies, construction, equipment, or services. In addition to the specified GFE documentation, the Bidder shall submit the following forms:

15.1.1. The following forms shall be completed and submitted within **4 Working Days after the Bid Opening**. Failure to include any of the forms shall cause the Bid to be deemed **non-responsive**.

1. Form AA61 List of Work Made Available
2. Form AA62 Summary of Bids Received
3. Form AA63 Good Faith Effort List of Subcontractors Solicited

FUNDING AGENCY PROVISIONS
FORMS

LIST OF WORK MADE AVAILABLE

List items of the Work the Bidder made available to DBE firms. Identify those items of the Work the Bidder might otherwise perform with its own forces and those items that have been broken down into economically feasible units to facilitate DBE participation. For each item listed, show the dollar amount and percentage of the Base Bid. The Bidder must demonstrate that enough work to meet the goal was made available to DBE firms.

ITEM OF WORK MADE AVAILABLE	NAICS CODE	BIDDER NORMALLY PERFORMS ITEM (Y/N)	ITEM BROKEN DOWN TO FACILITATE PARTICIPATION (Y/N)	AMOUNT	PERCENTAGE OF BASE BID

SUMMARY OF BIDS RECEIVED

Type of Job	NAICS CODES	Company Name	Selected (Y/N)	Bid Amount	DBE	Non-DBE	Explanation for not Selecting

USE ADDITIONAL FORMS AS NECESSARY

DISADVANTAGE BUSINESS ENTERPRISE (DBE)
GOOD FAITH EFFORT LIST OF SUBCONTRACTORS SOLICITED

Contractor Name	Contractor Address	How Located	Date of Contact	Contact Method	Task Description	Response (Yes/No)

USE ADDITIONAL FORMS AS NECESSARY

ATTACHMENT E
SUPPLEMENTARY SPECIAL PROVISIONS

SUPPLEMENTARY SPECIAL PROVISIONS

The following Supplementary Special Provisions (SSP) modifies the following documents:

1. The **2018 Edition** of the Standard Specifications for Public Works Construction (The "GREENBOOK").
2. The **2018 Edition** of the City of San Diego Standard Specifications for Public Works Construction (The "WHITEBOOK"), including the following:
 - a) General Provisions (A) for all Construction Contracts.

SECTION 1 – GENERAL, TERMS, DEFINITIONS, ABBREVIATIONS, UNITS OF MEASURE, AND SYMBOLS

1-2 TERMS AND DEFINITIONS. To the "WHITEBOOK", items 43, 56, 69, and 102, DELETE in their entirety and SUBSTITUTE with the following:

43. **Field Order** - A Field Order is a written agreement by the Engineer to compensate you for Work items in accordance with 2-8, "EXTRA WORK" or 2-9, "CHANGED CONDITIONS". A Field Order does not change the Contract Price, Contract Time, or the scope intent of the Contract.
56. **Notice of Completion (NOC)** - A document recorded with the County of San Diego to signify that the Contract Work has been completed and accepted by the City.
69. **Punchlist** - A list of items of Work or corrections generated after a Walk-through that is conducted when you consider that the Work and Services are complete, and as verified by the Owner. The Punchlist may be completed in phases if defined in the Contract.
102. **Walk-through** - The procedure the City uses to evaluate the status of the Project or the phase of the Project and to generate a Punchlist prior to Acceptance.

To the "WHITEBOOK", item 54, "Normal Working Hours", ADD the following:

The **Normal Working Hours** are **variable**. Work must be completed by May 31, 2021. See 6-1.2, "Commencement of Work".

To the "WHITEBOOK", ADD the following:

108. **Substantial Completion** – When all Contract Work is deemed complete by the Contractor in writing, and as verified by the Owner. Substantial Completion may be completed in phases if defined in the Contract.

109. **Acceptance of Work** – When all of the Contract work is deemed officially complete, including all Punchlist items, by the Owner.
110. **Occupancy** – When the Owner deems a building is ready for use, the Owner will issue a certificate of Occupancy in writing.

1-7.1.3 Requests for Information (RFI). To the “WHITEBOOK”, DELETE in its entirety and SUBSTITUTE with the following:

1. Should You discover a conflict, omission, errors in the Contract Documents, differences with existing field conditions, or have any questions concerning interpretation or clarification of Contract Documents, or when you propose deviations to the standards or design, you shall submit a Request for Information (RFI) to the City regarding your question or clarification within **1 Working Day**.
2. Your RFI shall meet the following requirements:
 - a) All RFIs, whether by You or your Subcontractor or supplier at any tier, shall be submitted by You to the City.
 - b) RFIs shall be numbered sequentially.
 - c) You shall clearly and concisely set forth the single issue for which interpretation or clarification is sought, indicate Specification Section numbers, Contract Drawing numbers, and details, or other items involved, and state why a response is required from the City.
 - d) RFIs shall be submitted within **1 Working Day** in order that they may be adequately researched and answered before the response affects any critical activity of the Work.
 - e) Should You believe that a response to an RFI causes a change to the requirements of the Contract, You shall, before proceeding, give written notice to the City, indicating that You believe that City response to the RFI to be a Change Order. Failure to give such written notice within **5 Working Days** of receipt of the City’s response to the RFI shall waive Your right to seek additional time or cost.
3. The City will respond to RFIs within **5 Working Days** unless the City notifies You in writing that a response will take longer. The **5 Working Days** shall begin when the RFI is received and dated by the City. Responses from the City will not change any requirement of the Contract unless so noted by the City in the response to the RFI. The City will not issue a Change Order for Extra Work or additional time when the issue raised in the RFI was due to your fault, neglect, or any unauthorized deviations from the project design or specifications.
4. If You proceed in resolving a conflict, omission, or any error in the Contract Documents without sending the City an RFI in accordance with the requirements stated above, the City may require You to remove such work at Your cost or back charge You the cost to remove this work.

SECTION 3 – CONTROL OF THE WORK

3-2 SELF-PERFORMANCE. To the “GREENBOOK”, DELETE in its entirety and SUBSTITUTE with the following:

1. You shall perform, with your own organization, Contract Work amounting to at least 30% of the base Bid.

3-9 TECHNICAL STUDIES AND SUBSURFACE DATA. To the “WHITEBOOK”, ADD the following:

5. In preparation of the Contract Documents, the designer has relied upon the following reports of explorations and tests at the Work Site:
 - a) Geotechnical Evaluation for City Heights Pool, by Platt/Whitelaw Architects, Inc. dated February 12, 2019.
6. The reports listed above are available for review at the following link:

<https://filecloud.sandiego.gov/url/cityheightspoolspecs>

3-10 SURVEYING. To the “GREENBOOK” and “WHITEBOOK”, DELETE in its entirety and SUBSTITUTE with the following:

3-10 SURVEYING (DESIGN-BID-BUILD).

3-10.1 General.

1. You shall provide all required site layout and general grade checking work not specified in 3-10.2, “Survey Services Provided by City (via City Consultant Surveyor)”.
2. Notify the City, in writing, at least 2 Working Days prior to requesting survey services provided by the City.

3-10.2 Survey Services Provided by City (via City Consultant Surveyor).

1. Monument Perpetuation, including mark-outs, will be performed by the City Engineering Support & Technical Services Division’s (ESTS), Land Survey Section (LSS), unless otherwise noted. You are responsible for requesting the coordination of these services.
 - a) If at any time a monument will be destroyed or covered, such monument shall be perpetuated in accordance with state law. Inform the LSS, via project Resident Engineer, if any monument will be destroyed or covered during any construction activity.
2. The following surveying services (including construction staking), as defined in California Business & Professions Code §8726, shall be provided by the City or a City consultant surveyor:

- a) Locating or establishing alignment or elevations of all features or structures shown on project Plans.
 - b) Locating or establishing geodetic control points for all site feature or structure locations.
 - c) Produce topographic as-built data.
 - d) Locating, establishing, or re-establishing monuments, property lines, right-of-way lines, or easement lines.
 - e) Verifying structure finish grade elevations.
3. All construction survey stakes, control points, and other survey related marks provided by the City shall be preserved for the duration of the Project. If any construction survey stakes, control points, or other survey related marks are lost or disturbed and need to be replaced, such replacement shall be performed at the your expense.

3-10.3 Payment.

- 1. The payment for site layout and general grade checking Work, coordination, and preservation of all survey related marks shall be included in the Contract Price.

3-13.1 Completion. To the "GREENBOOK", DELETE in its entirety and SUBSTITUTE with the following:

- 1. You shall submit a written assertion that the Work has been completed and is ready for Owner Acceptance. If, in the Engineer's judgment, the Work has been completed in accordance with the Contract Documents, the Engineer will set forth in writing the date the Work was completed. This will be the date that you are relieved from responsibility to protect and maintain the Work and to which liquidated damages will be computed.

3-13.1.1 Requirements Before Requesting a Walk-through. To the "WHITEBOOK", DELETE in its entirety and SUBSTITUTE with the following:

3-13.1.1 Requirements Before Requesting Substantial Completion.

- 1. The following items are required prior to requesting a Substantial Completion:
 - a) Remove temporary facilities from the Site.
 - b) Thoroughly cleaning the Site and removing all mark outs and construction staking.
 - c) Provide completed and signed Red-lines in accordance with 3-7.3 "Redlines and Record Documents".

- d) Provide all material and equipment maintenance and operation instructions and/or manuals.
- e) Provide all tools which are permanent parts of the equipment installed in the Project.
- f) Provide and properly identify all keys for construction and all keys for permanent Work.
- g) Provide all final Special Inspection reports required by the applicable building Code.
- h) Provide all items specified to be supplied as extra stock. Wrap, seal, or place in a container all items as necessary to allow for storage by the City for future use. Verify the specified quantities.
- i) Ensure that all specified EOCP and certified wage rate documentations covering the Contract Time have been submitted.
- j) Provide the spare parts for the proposed irrigation system as specified in the Special Provisions.
- k) If the Work includes sewer and storm drain installations, the inspection shall include televising in accordance with 306-18, "VIDEO INSPECTION".
- l) If the Work includes a Plant Establishment Period, Work in accordance with 801-6, "MAINTENANCE AND PLANT ESTABLISHMENT" shall be completed prior to requesting Substantial Completion, unless approved otherwise by the Owner.
- m) Notify the Engineer to arrange a final inspection of permanent BMPs installed.

3-13.1.2 Walk-through and Punchlist Procedure. To the "WHITEBOOK", DELETE in its entirety and SUBSTITUTE with the following:

1. You shall notify the Engineer 15 Working Days in advance of date of anticipated Substantial Completion to allow time for Engineer to schedule a Walk-through. After you complete the requirements in 3-13.1.1, "Requirements Before Requesting Substantial Completion" and when you consider that the Work is Substantially Complete, you will notify the Engineer in writing that the Project is Substantially Complete. The Engineer will review your request and determine if the Project is ready for a Walk-through, by verifying whether you have completed all items as required by 3-13.1.1, "Requirements Before Requesting Substantial Completion". Within 7 Working Days, the City will either reject your request of a Walk-through in writing or schedule a Walk-through inspection. The Engineer shall facilitate the Walk-through.

2. The following documents shall be provided at the time of your Walk-through request: As-Built markup, Plans, specifications, technical data such as submittals and equipment manuals, draft final payment, warranties, material certifications, bonds, guarantees, maintenance service agreements, and maintenance and operating manuals.
3. Written warranties, except manufacturer's standard printed warranties, shall be on a letterhead addressed to you. Warranties shall be submitted in the format described in this section, modified as approved by the City, to suit the conditions pertaining to the warranty. Lack of submitting these items will delay start of Walk-through.
4. The Engineer will provide you with the Punchlist within 15 Working Days after the date of the Walk-through. The City shall not provide a preliminary Punchlist.
5. If the Engineer finds that the Project is not Substantially Complete as defined herein, the Engineer will terminate the Walk-through and notify you in writing.
6. If, at any time during the Engineer's evaluation of the corrective Work required by the Punchlist, the Engineer discovers that additional corrective Work is required, the Engineer may include that corrective Work in the Punchlist.
7. You shall remain solely responsible for the Project Site until the Project is completely operational, all Punchlist items have been corrected, and all operation and maintenance manuals have been accepted by the City.
8. The Engineer shall meet with you until all Punchlist items are corrected. You shall complete the Punchlist within 30 Working Days, and Working Days will continue to be counted until Acceptance of the Project.

3-13.2 Acceptance. To the "WHITEBOOK", DELETE in its entirety and SUBSTITUTE with the following:

1. You shall provide the completed, signed, and stamped DS-563 to the Engineer prior to Acceptance.
2. You shall deliver the final As-builts and final billing prior to Acceptance.
3. You shall assemble and deliver to the Engineer a Final Summary Report and Affidavit of Disposal prior to Acceptance.
4. Acceptance shall occur after all of the requirements contained in the Contract Documents have been fulfilled. If, in the Engineer's judgment, you have fully performed the Contract, the Engineer will recommend to the City Engineer that your performance of the Contract be accepted. You shall receive notification of Acceptance in writing from the Owner and counting of working days shall cease and Warranty begins.

5. Retention can be released 35 Calendar Days after NOC. Submit your request for retention to the Resident Engineer and they will mail to you a "Release of Claims" form which shall be completed and returned before the retention will be released.

3-13.3

Warranty. To the "WHITEBOOK", DELETE in its entirety and SUBSTITUTE with the following:

1. You shall warranty and repair all defective materials and workmanship for a period of 1 year. This call back warranty period shall start on the date the Work was accepted by the City unless the City has Beneficial Use or takes Occupancy of the project earlier (excluding water, sewer, and storm drain projects).
2. You shall warranty the Work free from all latent defects for 10 years and patent defects for a period of 4 years.
3. The warranty period for specific items covered under manufacturers' or suppliers' warranties shall commence on the date they are placed into service at the direction of the Engineer in writing.
4. All express warranties from Subcontractors, manufacturers', or Suppliers', of any tier, for the materials furnished and Work performed shall be assigned, in writing, to the City, and shall be delivered to the Engineer prior to the Acceptance of your performance of the Contract.
5. Replace or repair defective materials and workmanship in a manner satisfactory to the Engineer after notice to do so from the Engineer and within the time specified in the notice. If you fail to make such replacements or repairs within the time specified in the notice, the City may perform the replacement or repairs at your expense. If you fail to reimburse the City for the actual costs, your Surety shall be liable for the cost
6. Items that shall be warrantied free from defective workmanship and materials for a period longer than 1 year are as follows:

Specified Item	Minimum Warranty Period
Detectable Warning Tile Construction	3 Years of Manufacturer's Warranty
All Work Under SECTION 500 – PIPELINE REHABILITATION	3 Years
Fiber Optic Interconnect Cables	2 Years
Luminaires*	10 Years of Manufacturer's Warranty
LED Signal Modules	3 Years of Manufacturer's Warranty
Field Devices Associated with 700-6.3, "Adaptive Control Note"	See 700-6.3.9, "Warranty"

- * Provide documentation verifying that the induction luminaire models being offered for the Project are covered by the 10 year warranty.

7. You shall provide the City and property owner a copy of the manufacturer's warranty for private sewer pumps, including the alarm panel and all other accessories.
 - a) You shall involve the manufacturer in the installation and startup as needed to secure any extended warranty required.
 - b) Nothing in here is intended to limit any manufacturer's warranty which provides the City with greater warranty rights than set forth in this section or the Contract Documents.
 - c) The warranty shall include all components. The form of the warranty shall be approved by the Engineer in accordance with 3-13.3.2, "Warranty Format Requirements".
8. If, during the warranty period, any item of the Work is found to be Defective Work, you shall correct it promptly after receipt of written notice from the City to do so. The warranty period shall be extended with respect to portions of the Work corrected as part of the warranty requirements.

3-15.2 Integration of Work with Separate Contractors. To the "WHITEBOOK", ADD the following:

2. A separate Contractor will be working on accessibility upgrades in the City Heights Recreation Center front entrance, parking area, and within the restrooms during construction. Please coordinate accordingly.

SECTION 4 - CONTROL OF MATERIALS

4-1.3.4 Specialty Inspection Paid for by the Contractor. To the "WHITEBOOK", ADD the following:

2. See Technicals.

4-3.5.1 Payment. To the "WHITEBOOK", item 1, DELETE in its entirety and SUBSTITUTE with the following:

1. The payment for special inspections and testing Work required in the Contract Documents and in accordance with 4-3.5, "Special Inspections", shall be paid under the Bid item for **"Construction of City Heights Pool Improvements"**.

4-3.6 Preapproved Materials. To the "WHITEBOOK", ADD the following:

3. You shall submit in writing a list of all products to be incorporated in the Work that are on the AML.

4-6 **TRADE NAMES.** To the "WHITEBOOK", ADD the following:

11. You shall submit your list of proposed substitutions for an "equal" item **at least 10 Working Days prior to the Bid due date** and on the City's Product Submittal Form available at:

<http://www.sandiego.gov/publicworks/edocref/index.shtml>

SECTION 5 – LEGAL RELATIONS AND RESPONSIBILITIES

5-4 **INSURANCE.** To the "GREENBOOK", DELETE in its entirety and SUBSTITUTE with the following:

5-4 **INSURANCE.**

1. The insurance provisions herein shall not be construed to limit your indemnity obligations contained in the Contract.

5-4.1 **Policies and Procedures.**

1. You shall procure the insurance described below, at its sole cost and expense, to provide coverage against claims for loss including injuries to persons or damage to property, which may arise out of or in connection with the performance of the Work by you, your agents, representatives, officers, employees or Subcontractors.
2. Insurance coverage for property damage resulting from your operations is on a replacement cost valuation. The market value will not be accepted.
3. You shall maintain this insurance for the duration of this Contract and at all times thereafter when you are correcting, removing, or replacing Work in accordance with this Contract. Your liabilities under the Contract, e.g., your indemnity obligations, is not deemed limited to the insurance coverage required by this Contract.
4. The payment for insurance shall be included in the Contract Price as bid by you. Except as specifically agreed to by the City in writing, you are not entitled to any additional payment. Do not begin any Work under this Contract until you have provided and the City has approved all required insurance.
5. Policies of insurance shall provide that the City is entitled to 30 Days (10 Days for cancellation due to non-payment of premium) prior written notice of cancellation or non-renewal of the policy. Maintenance of specified insurance coverage is a material element of the Contract. Your failure to maintain or renew coverage or to provide evidence of renewal during the term of the Contract may be treated by the City as a material breach of the Contract.

5-4.2 Types of Insurance.

5-4.2.1 Commercial General Liability Insurance.

1. Commercial General Liability Insurance shall be written on the current version of the ISO Occurrence form CG 00 01 07 98 or an equivalent form providing coverage at least as broad.
2. The policy shall cover liability arising from premises and operations, XCU (explosions, underground, and collapse), independent contractors, products/completed operations, personal injury and advertising injury, bodily injury, property damage, and liability assumed under an insured's contract (including the tort liability of another assumed in a business contract).
3. There shall be no endorsement or modification limiting the scope of coverage for either "insured vs. insured" claims or contractual liability. You shall maintain the same or equivalent insurance for at least 10 years following completion of the Work.
4. All costs of defense shall be outside the policy limits. Policy coverage shall be in liability limits of not less than the following:

<u>General Annual Aggregate Limit</u>	<u>Limits of Liability</u>
Other than Products/Completed Operations	\$2,000,000
Products/Completed Operations Aggregate Limit	\$2,000,000
Personal Injury Limit	\$1,000,000
Each Occurrence	\$1,000,000

5-4.2.2 Commercial Automobile Liability Insurance.

1. You shall provide a policy or policies of Commercial Automobile Liability Insurance written on the current version of the ISO form CA 00 01 12 90 or later version or equivalent form providing coverage at least as broad in the amount of \$1,000,000 combined single limit per accident, covering bodily injury and property damage for owned, non-owned, and hired automobiles ("Any Auto").
2. All costs of defense shall be outside the limits of the policy.

5-4.2.5 Contractors Builders Risk Property Insurance.

1. You shall provide at your expense, and maintain until Final Acceptance of the Work, a Special Form Builders Risk Policy or Policies. This insurance shall be in an amount equal to the replacement cost of the completed Work (without deduction for depreciation) including the cost of excavations, grading, and filling. The policy or policies limits shall be 100% of this Contract value of the Work plus 15% to cover

administrative costs, design costs, and the costs of inspections and construction management.

2. Insured property shall include material or portions of the Work located away from the Site but intended for use at the Site and shall cover material or portions of the Work in transit. The policy or policies shall include as insured property scaffolding, falsework, and temporary buildings located at the Site. The policy or policies shall cover the cost of removing debris, including demolition.
3. The policy or policies shall provide that all proceeds thereunder shall be payable to the City as Trustee for the insured, and shall name the City, the Contractor, Subcontractors, and Suppliers of all tiers as named insured. The City, as Trustee, will collect, adjust, and receive all monies which may become due and payable under the policy or policies, may compromise any and all claims thereunder, and will apply the proceeds of such insurance to the repair, reconstruction, or replacement of the Work.
4. Any deductible applicable to the insurance shall be identified in the policy or policies documents and responsibility for paying the part of any loss not covered because of the application of such deductibles shall be apportioned among the parties except for the City as follows: if there is more than one claimant for a single occurrence, then each claimant shall pay a pro-rata share of the per occurrence deductible based upon the percentage of their paid claim to the total paid for insured. The City shall be entitled to 100% of its loss. You shall pay the City any portion of that loss not covered because of a deductible at the same time the proceeds of the insurance are paid to the City as trustee.
5. Any insured, other than the City, making claim to which a deductible applies shall be responsible for 100% of the loss not insured because of the deductible. Except as provided for under California law, the policy or policies shall provide that the City is entitled to 30 Days prior written notice (10 Days for cancellation due to non-payment of premium) of cancellation or non-renewal of the policy or policies.

5-4.3 Rating Requirements. Except for the State Compensation Insurance Fund, all insurance required by this Contract as described herein shall be carried only by responsible insurance companies with a rating of, or equivalent to, at least "A-, VI" by A.M. Best Company, that are authorized by the California Insurance Commissioner to do business in the State, and that have been approved by the City.

5-4.3.1 Non-Admitted Carriers. The City will accept insurance provided by non-admitted, "surplus lines" carriers only if the carrier is authorized to do business in the State and is included on the List of Approved Surplus Lines Insurers (LASLI list).

All policies of insurance carried by non-admitted carriers shall be subject to all of the requirements for policies of insurance provided by admitted carriers described herein.

5-4.4 Evidence of Insurance. Furnish to the City documents e.g., certificates of insurance and endorsements evidencing the insurance required herein, and furnish renewal documentation prior to expiration of this insurance. Each required document shall be signed by the insurer or a person authorized by the insurer to bind coverage on its behalf.

We reserve the right to require complete, certified copies of all insurance policies required herein.

5-4.5 Policy Endorsements.

5-4.5.1 Commercial General Liability Insurance.

5-4.5.1.1 Additional Insured.

1. You shall provide at your expense policy endorsement written on the current version of the ISO Occurrence form CG 20 10 11 85 or an equivalent form providing coverage at least as broad.
2. To the fullest extent allowed by law e.g., California Insurance Code §11580.04, the policy shall be endorsed to include the City and its respective elected officials, officers, employees, agents, and representatives as additional insured.
3. The additional insured coverage for projects for which the Engineer's Estimate is \$1,000,000 or more shall include liability arising out of:
 - a) Ongoing operations performed by you or on your behalf,
 - b) your products,
 - c) your Work, e.g., your completed operations performed by you or on your behalf, or
 - d) premises owned, leased, controlled, or used by you.
4. The additional insured coverage for projects for which the Engineer's Estimate is less than \$1,000,000 shall include liability arising out of:
 - a) Ongoing operations performed by you or on your behalf,
 - b) your products, or
 - c) premises owned, leased, controlled, or used by you.

5-4.5.1.2 Primary and Non-Contributory Coverage. The policy shall be endorsed to provide that the coverage with respect to operations, including the completed operations, if appropriate, of the Named Insured is primary to any insurance or self-insurance of the City and its elected officials, officers, employees, agents and representatives. Further, it shall provide that any insurance maintained by the City and its elected officials, officers, employees, agents and representatives shall be in excess of your insurance and shall not contribute to it.

5-4.5.1.3 Project General Aggregate Limit. The policy or policies shall be endorsed to provide a Designated Construction Project General Aggregate Limit that will apply only to the Work. Only claims payments which arise from the Work shall reduce the Designated Construction Project General Aggregate Limit. The Designated Construction Project General Aggregate

Limit shall be in addition to the aggregate limit provided for the products-completed operations hazard.

5-4.5.2 Commercial Automobile Liability Insurance.

5-4.5.2.1 Additional Insured. Unless the policy or policies of Commercial Auto Liability Insurance are written on an ISO form CA 00 01 12 90 or a later version of this form or equivalent form providing coverage at least as broad, the policy shall be endorsed to include the City and its respective elected officials, officers, employees, agents, and representatives as additional insured, with respect to liability arising out of automobiles owned, leased, hired or borrowed by you or on your behalf. This endorsement is limited to the obligations permitted by California Insurance Code §11580.04.

5-4.5.5 Builders Risk Endorsements.

5-4.5.5.1 Waiver of Subrogation. The policy or policies shall be endorsed to provide that the insurer will waive all rights of subrogation against the City, and its respective elected officials, officers, employees, agents, and representatives for losses paid under the terms of the policy or policies and which arise from Work performed by the Named Insured for the City.

5-4.5.5.2 Builders Risk – Partial Utilization. If the City desires to occupy or use a portion or portions of the Work prior to Acceptance in accordance with this Contract, the City will notify you and you shall immediately notify your Builder's Risk insurer and obtain an endorsement that the policy or policies shall not be cancelled or lapse on account of any such partial use or occupancy. You shall obtain the endorsement prior to the City's occupation and use.

5-4.6 Deductibles and Self-Insured Retentions. You shall pay for all deductibles and self-insured retentions. You shall disclose deductibles and self-insured retentions to the City at the time the evidence of insurance is provided.

5-4.7 Reservation of Rights. The City reserves the right, from time to time, to review your insurance coverage, limits, deductibles and self-insured retentions to determine if they are acceptable to the City. The City will reimburse you, without overhead, profit, or any other markup, for the cost of additional premium for any coverage requested by the Engineer but not required by this Contract.

5-4.8 Notice of Changes to Insurance. You shall notify the City 30 Days prior to any material change to the policies of insurance provided under this Contract.

5-4.9 Excess Insurance. Policies providing excess coverage shall follow the form of the primary policy or policies e.g., all endorsements.

5-4.10 Architects and Engineers Professional Insurance (Errors and Omissions Insurance).

1. For Contracts with required engineering services (e.g., Design-Build, preparation of engineered Traffic Control Plans (TCP), and etc) by you, you shall keep or require all of your employees or Subcontractors, who provide professional engineering services under this contract, Professional Liability coverage with a limit of **\$1,000,000** per claim and **\$2,000,000** annual aggregate in full force and effect.

2. You shall ensure the following:
 - a) The policy retroactive date is on or before the date of commencement of the Project.
3. The policy will be maintained in force for a period of 3 years after completion of the Project or termination of this Contract, whichever occurs last. You agree that for the time period specified above, there will be no changes or endorsements to the policy that affect the specified coverage. If professional engineering services are to be provided solely by the Subcontractor, you shall:
 - a) Certify this to the City in writing and
 - b) Agree in writing to require the Subcontractor to procure Professional Liability coverage in accordance with the requirements set forth above.

5-4.11 Workers' Compensation Insurance and Employers Liability Insurance.

1. In accordance with the provisions of §3700 of the California Labor Code, you shall provide at your expense Workers' Compensation Insurance and Employers Liability Insurance to protect you against all claims under applicable state workers compensation laws. The City, its elected officials, and employees will not be responsible for any claims in law or equity occasioned by your failure to comply with the requirements of this section.
2. Limits for this insurance shall be not less than the following:

<u>Workers' Compensation</u>	<u>Statutory Employers Liability</u>
Bodily Injury by Accident	\$1,000,000 each accident
Bodily Injury by Disease	\$1,000,000 each employee
Bodily Injury by Disease	\$1,000,000 policy limit
3. By signing and returning the Contract you certify that you are aware of the provisions of §3700 of the Labor Code which requires every employer to be insured against liability for worker's compensation or to undertake self-insurance in accordance with the provisions of that code and you shall comply with such provisions before commencing the Work as required by §1861 of the California Labor Code.

5-4.11.1 Waiver of Subrogation. The policy or policies shall be endorsed to provide that the insurer will waive all rights of subrogation against the City and its respective elected officials, officers, employees, agents, and representatives for losses paid under the terms of the policy or policies and which arise from Work performed by the Named Insured for the City.

5-10.2.1 Public Notice by Contractor. To the "WHITEBOOK", item 3, DELETE in its entirety and SUBSTITUTE with the following:

2. No less than 5 Working Days in advance of Project construction activities and utility service interruptions, you shall notify all critical facilities, businesses, institutions,

property owners, residents, or any other impacted stakeholders within a minimum 300-foot (90 m) radius of the Project. Verbal and written notifications shall be sent to critical facilities (including but not limited to police stations, fire stations, hospitals, and schools). A copy of written notifications sent to any critical facility shall also be sent to the Resident Engineer. You shall keep records of the people contacted, along with the dates of notification, and shall provide the record to the Engineer upon request. You shall identify all other critical facilities that need to be notified.

3. Furnish and distribute public notices in the form of door hangers using the City's format to all occupants and/or property owners along streets:
 - a) Where Work is to be performed at least Working 5 Working Days before starting construction or survey activities or impacting the community as approved by the Resident Engineer.
 - b) Within 5 Working Days of the completion of your construction activities where Work was performed, you shall distribute public notices in the form of door hangers, which outlines the anticipated dates of Asphalt Resurfacing or Slurry Seal.
- a) 72 hours in advance of the scheduled resurfacing.

5-13

ELECTRONIC COMMUNICATION. To the "WHITEBOOK", DELETE in its entirety and SUBSTITUTE with the following:

1. Virtual Project Manager shall be used on this Contract.
2. You shall post all communications addressed to the Engineer concerning construction including RFIs, submittals, daily logs including the Weekly Statement of Working Days (WSWD), Storm Water, and transmittals to the Virtual Project Manager (VPM) website established for the Projects. This shall not supersede any Federal requirements.
3. Maintain a list of scheduled activities including planned and actual execution dates for all major construction activities and milestones defined in the approved Schedule.
4. Review and act on all communications addressed to you in the VPM project website.
5. A user's guide to the VPM system is available on the City's website and shall be provided to you at the Pre-construction Meeting. Refer to the VPM training videos and forms at the location below:

<https://www.sandiego.gov/publicworks/edocref>
6. Submit the Sensitive Information Authorization Acknowledgement Form and VPM User Agreement located in the VPM user's guide at the Pre-construction Meeting.

7. SECTION 6 – PROSECUTION AND PROGRESS OF THE WORK

6-1.1 Construction Schedule. To the "WHITEBOOK", item 1, subsection "s", DELETE in its entirety and SUBSTITUTE with the following:

- s) Submit an updated cash flow forecast with every pay request (for each Project ID or WBS number provided in the Contract) showing periodic and cumulative construction billing amounts for the duration of the Contract Time. If there has been any Extra Work since the last update, include only the approved amounts.
 - i. Refer to the Sample City Invoice materials in **Appendix D – Sample City Invoice with Cash Flow Forecast** and use the format shown.
 - ii. See also the "Cash Flow Forecast Example" at the location below:

<https://www.sandiego.gov/publicworks/edocref>

6-1.5.2 Excusable Non-Compensable Delays. To the "WHITEBOOK", DELETE in its entirety and SUBSTITUTE with the following:

6-1.5.2 Excusable Non-Compensable and Concurrent Delays.

- 1. The City shall only issue an extension of time for Excusable Delays that meet the requirements of 6-4.2, "Extensions of Time" for the following circumstances:
 - a) Delays resulting from Force Majeure.
 - b) Delays caused by weather.
 - c) Delays caused by changes to County, State, or Federal law.
- 2. When a non-excusable delay is concurrent with an Excusable Delay, you shall not be entitled to an extension of Contract Time for the period the non-excusable delay is concurrent with the Excusable Delay.
- 3. When an Excusable Non-Compensable Delay is concurrent with an Excusable Compensable Delay, you shall be entitled to an extension of Contract Time, but shall not be entitled to compensation for the period the Excusable Non-Compensable Delay is concurrent with the Excusable Compensable Delay.

6-1.2 Commencement of the Work. To the "WHITEBOOK", ADD the following:

- 5. Work must be completed by May 31, 2021. To meet this schedule, Contractor has option to use Saturdays and Sundays and also Night Work hours (such as 7:00 p.m. to 3:00 a.m., 9:00 p.m. to 5:00 a.m., or other adjusted night hours based on City approval). Contractor shall identify in their first schedule submitted to the City of San Diego the selection of their hours to allow advanced notice for City of San Diego to mobilize staff for inspection and quality control. During the contract, any changes to this must be given to the City at least one week in advance. Regarding weekend and extended hours work beyond normal work hours defined in section

1-2, note that prevailing wage requirements match with union agreements. Contractor shall conform to union requirements, including but not limited to number of crews needed to meet this section's hour and working day requirement, and Contractor shall price this into their bid. If Saturdays, Sundays, and/or nights are used, they shall be counted as Working Days of the Contract Time.

6. The CONTRACTOR shall be responsible for applying for and obtaining any permits, including a noise abatement permit, to do the work at night. All costs for obtaining approval for night work, and to perform the work at night, shall be included in the lump sum cost bid for "Night Work". The Contractor shall not have 2 shifts in row with the same crew personnel.

6-4.2 Extensions of Time. To the "WHITEBOOK", DELETE in its entirety and SUBSTITUTE with the following:

1. The Contract Time shall not be modified except by Change Order.
2. You shall notify the City in writing within **1 Working Day** after the occurrence and discovery of an event that impacts the Project Schedule.
 - a) If you believe this event requires a Change Order, you shall submit a written Change Order request with a report to the City that explains the request for Change Order within **5 Working Days**. The Change Order request must include supporting data, a general description of the discovery, the basis for extension, and the estimated length of extension. The City may grant an extension of time, in writing, for the Change Order request if you require more time to gather and analyze data.
3. The Engineer shall not grant an extension of Contract Time in accordance with 6-1.5, "Excusable Delays" unless you demonstrate, through an analysis of the critical path, the following:
 - a) The event causing the delay impacted the activities along the Project's critical path.
 - b) The increases in the time to perform all or part of the Project beyond the Contract Time arose from unforeseeable causes beyond your control and without your fault or negligence and that all project float has been used.
4. Any modifications to the Contract Time will be incorporated into the weekly document that the Engineer issues that stipulates the Contract Time. If you do not agree with this document, submit to the Engineer for review a written protest supporting your objections to the document within **30 Calendar Days** after receipt of the statement. Your failure to file a timely protest shall constitute your acceptance of the Engineer's weekly document.
 - a) Your protest will be considered a claim for time extension and shall be subject to 2-10.1, "Claims".

6-4.4 **Written Notice and Report.** To the "WHITEBOOK", DELETE in its entirety and SUBSTITUTE with the following:

1. Your failure to notify the Resident Engineer within **1 Working Day** OR provide a Change Order request within **5 Working Days** after the event, in accordance with 6-4.2, "Extensions of Time", will be considered grounds for refusal by the City to consider such request if your failure to notify prejudices the City in responding to the event.

ADD:

6-6.1.1 Environmental Document.

1. The City of San Diego has prepared a **Notice of Exemption** for **City Heights Pool Reconstruction**, Project No. **B-18044**, as referenced in the Contract Appendix. You shall comply with all requirements of the **Notice of Exemption** as set forth in **Appendix A**.
2. Compliance with the City's environmental document shall be included in the Contract Price.

6-9 **LIQUIDATED DAMAGES.** DELETE in its entirety and SUBSTITUTE with the following:

1. Your failure to complete the Work within times specified in the Attachment A - Scope of Work shall result in damages being sustained by the City. Such damages are, and shall continue to be, impracticable and extremely difficult to determine. For each consecutive Working Day in excess of the time specified for the completion of the Work, as adjusted in accordance with 6-4, "DELAYS AND EXTENSIONS OF TIME", you shall pay to the City, or have withheld from monies due it, the sum described in the table below.
2. The execution of the Contract shall constitute agreement between you the City that the liquidated damage amount described in the table below is the value of the damage caused by your failure to complete the Work within the allotted time. Such sum shall not be construed as a penalty and may be deducted from your payments if such delay occurs.

Contract Value	Liquidated Damage Daily Amount
Less than \$100,000	\$750
\$100,000 and more	\$1500

SECTION 7 – MEASUREMENT AND PAYMENT

7-3.1 **General.** To the "WHITEBOOK", ADD the following:

3. The Lump Sum Bid item for "**Construction of City Heights Pool Improvements**" shall include but not be limited to:
 - a) Payment for the demolition of the existing pool and reconstruction of the pool, installation of decking, children's pool deck drainage, slides, shade

sails, all work for groundwater pump station, sewer main, and fencing, and any incidental Survey work required to complete construction specified in the Plans, Contract Documents, and Technical Sections.

- b) Payment for clearing and grubbing Work and shall include full compensation for all clearing, grubbing, demolition, and excavation work within the Project Site. Payment for preservation of property shall also be included in this Bid item.
- c) Payment for all required inspections specified in the Plans, Technicals, and other Contract Documents including, but not limited to, Department of Environmental Health Inspections, Pool Shotcrete Inspections, and inspections required on Structural Sheets.
- d) Payment for pool deck Work including the concrete pool deck, pool deck turndown, reinforcement, joints, dowels, fencing and gates, retaining wall, pedestrian walkway with retaining curb, pedestrian walkway with protective railing, landscape and irrigation and construction, complete-in-place.
- e) Payment for furnishing and installation of all valves and hose bibs with locking key and vacuum breaker, cleanout (SDS-102), backwater device (SDS-104), filter fabric, and rock envelope around perforated pipe.
- f) Payment for Dewatering Non-Hazardous Contaminated Water in accordance 3-12.8, Dewatering.

7-3.2

Partial and Final Payment. To the "GREENBOOK", paragraph (3), DELETE in its entirety and SUBSTITUTE with the following:

Upon commencement of the Work, an escrow account shall be established in a financial institution chosen by you and approved by the City. Documentation for an escrow payment shall have an escrow agreement signed by you, the City, and the escrow agent. From each progress payment, no less than 5% will be deducted and deposited by the City into the escrow account. Upon completion of the Contract, the City will notify the Escrow agent in writing to release the funds to you. Only the designated representative of the City shall sign the request for the release of Escrow funds.

7-3.9

Field Orders. To the "WHITEBOOK", DELETE in its entirety and SUBSTITUTE with the following:

1. If the cumulative total of Field Order items of Work does not exceed the "Field Orders" Bid Item, the City shall pay those Field Orders as shown below:

TABLE 7-3.9

FIELD ORDER LIMITS

Contract Price	Maximum Field Order Work Amount
Less than \$100,001	\$2,500
\$100,001 to \$1,000,000	\$5,000
\$1,000,001 to \$5,000,000	\$10,000
\$5,000,001 to \$15,000,000	\$20,000
\$15,000,001 to \$30,000,000	\$40,000
Greater than \$30,000,000	\$50,000

2. Order items of Work for contracts greater than \$15,000,000 will require additional approvals from the City prior to its approval by the Resident Engineer.
3. The City will issue a Field Order only after the City's acceptance of the cost of the field order amount.
4. Field Orders shall not be used to add scope or to include extensions of time related to changes in work.
5. If in the event there is a change related to the critical path on the project which necessitates an extension of time and the change amount is within the Field Order limits shown on Table 7-3.9, then a Field Order can be issued to compensate you for the approved costs. Any extensions of time associated with the change shall be included in a subsequent Change Order and no additional compensation shall be granted as part of the change order for the extension of time.
6. The unused portions of Field Orders Bid item shall revert to the City upon Acceptance.

7-3.11

Compensation Adjustments for Price Index Fluctuations. To the "WHITEBOOK" ADD the following:

This Contract is not subject to the provisions of The "WHITEBOOK" for Compensation Adjustments for Price Index Fluctuations for paving asphalt.

SECTION 209 – PRESSURE PIPE

209-1.1.1 General. To the "WHITEBOOK", ADD the following:

2. PVC products, specifically type C900 and C905, as manufactured or distributed by J-M Manufacturing Company or JM Eagle shall not be used on the Contract for pressurized pipe.
3. Refer to AWWA C900-16 for all references to AWWA C905.

SECTION 300 – EARTHWORK

300-1.1 General. To the "WHITEBOOK", ADD the following:

10. Prior to submittal of a Bid for this Work, the Contractor shall inspect the project site to verify the magnitude and cost of all Clearing and Grubbing required to accomplish the Work. Clearing and Grubbing shall also include saw cutting, demolition, removal and disposal of all existing improvements called out on the Plans to be removed and/or disposed of, including, but not limited to, soil, pool deck to the nearest joint including reinforcement, pool shell and reinforcement, pool plumbing, pool slides and play structures including footings, other pool appurtenances as shown on the plans, retaining walls, fencing and gates, trench drains and grates, underground utilities, lights and electrical conduits, trees/vegetation, irrigation, landscaping, tree trimming, tree removal, and all other existing improvements that are shown on the plans for removal or are in conflict with the installation of work shown on the plans, directed by the Resident Engineer to be removed, or otherwise required to perform the work.

Final removal depths for the pool are as shown on the Excavation Plan.

11. Prior to submittal of a Bid for this Work, the Contractor shall inspect the project site to verify the magnitude and cost of Salvaging and/or Re-Installing/Relocating Existing Improvements, as called out on the Plans and necessary to accomplish the Work.

300-1.4 Payment. To the "WHITEBOOK", ADD the following:

3. Payment for clearing and grubbing Work shall be included in the Bid item for "**Construction of City Heights Pool Improvements**". No other payments shall be made.

SECTION 302 – ROADWAY SURFACING

302-4.5 Scheduling, Public Convenience and Traffic Control. To the "GREENBOOK", paragraphs (1) and (2), DELETE in their entirety and SUBSTITUTE with the following:

1. In addition to the requirements of Part 6, you shall comply with the following:
 - a) At least 5 Working Days prior to commencing the Work, you shall submit your proposed Schedule to the Engineer for approval.

- b) Based upon the approved schedule, you shall notify residents and businesses of the Work and post temporary "No Parking" signs 72 hours in advance.
- c) Requests for changes in the approved Schedule shall be submitted to the Engineer for approval at least 3 Working Days before the street is scheduled to be sealed.

ADD:

SECTION 318 - GROUNDWATER PUMP STATION

318-1 GROUNDWATER PUMP STATION MATERIALS.

318-1.1 General.

1. Contractor shall furnish a package type pre-engineered pump station that will consist of a 4-foot diameter cylinder made of either fiberglass or concrete with factory installed pipe and conduit openings.
2. Pump station shall contain two pumps (duplex) of the flow rate and total dynamic head as indicated on the plans. Pumps shall be Flygt heavy duty, non-clog submersible pumps or approved equal.
3. Control panel shall be a stand-alone control panel with mounting hardware to mount to a building wall or on a pedestal. Control panel shall be a NEMA 4X enclosure.
4. Pump station appurtenances shall include:
 - a) Stainless steel guide bar bracket and cable holder hooks
 - b) Check valve and shutoff valve internal to the wet well as indicated on the plans
 - c) Vent piping
 - d) Influent and effluent pipe connections and orientations as indicated on the plans
 - e) Pressure transducer and backup level floats
 - f) Aluminum access hatch with fall protection grating

318-2 GROUNDWATER PUMP STATION CONSTRUCTION.

318-2.1 General.

1. Excavation and backfill for Pump Station installation shall conform to Standard Specifications, Section 300-3. Upon completion of excavation and dewatering, the subgrade at the bottom of the excavation shall be smoothed and adjusted for grade. The excavation bottom subgrade shall be compacted to a firm and unyielding condition to the extent practicable without soil amendment or other

special preparation. Wet well base structures shall be laid on a bed of filter fabric and crushed rock as shown on the Plans and conforming to this Specification and the pump station manufacturers recommendations. The bedding material shall be leveled and compacted to a firm and unyielding condition prior to installation of the structure.

2. Pump station installation shall conform to the details shown on the plans and shall include the installation of the wet well, pumps, force main piping including fittings, couplings, valves, anchor brackets, pipe penetrations and sealing, control panel and foundation.
3. Testing shall conform to the following requirements:
 - a) Pumps: The pump and power cord shall be visually inspected for imperfections, cuts or nicks.
 - b) Contractor to refer to manufacturer's specifications for testing procedures.
 - c) The pump shall have a ground continuity check.
 - d) Oil is added, and the pump is run. Voltage and current are monitored visually, electronically, and the tester listens for any noise or malfunction.
 - e) Contractor to fill wet well with potable water to allow each pump to cycle a minimum of five times. The alarm system should be cycled a minimum of three times.
 - f) Contractor to coordinate with the City Maintenance Department for inspection of the pump operation. The City's lead plumber and lead electrician (or designates) shall be present during startup and testing.
 - g) Contractor shall be responsible for providing water for use in testing the operation of the pump station.
4. The contractor shall assemble an operations and maintenance manual for the pump stations and provide 2 copies to the City.

318-2.2 Payment.

1. Payment for Groundwater Pump Station shall be included in the Bid item for **"Construction of City Heights Pool Improvements"** and shall include full compensation for furnishing all labor, materials, equipment, tools, and incidentals and for doing all the work (including excavation, shoring, dewatering, backfill, pump station installation, concrete, testing and commissioning, all electrical work, valves, and 3" force main), complete-in-place, and City of San Diego groundwater discharge permitting as specified in these Special Provisions, and as shown on the Plans. Information for permitting requirements can be found here:

<https://www.sandiego.gov/public-utilities/permits-construction/industrial-user-permits/groundwater>

SECTION 601 - TEMPORARY TRAFFIC CONTROL FOR CONSTRUCTION AND MAINTENANCE WORK ZONES

601-2.1.4 Traffic Control for Resurfacing and Slurry Sealing. To the "WHITEBOOK", item 3, subsection "d", DELETE in its entirety and SUBSTITUTE with the following:

- d) Place "NO PARKING - TOW-AWAY ZONE" signs 72 hours in advance of the scheduled slurry sealing. Reschedule street block segments which are not completed by the last posted Working Day. If a Work delay of 48 hours or more occurs from the originally scheduled Work date, remove the "NO PARKING - TOW-AWAY ZONE" signs for a minimum of 24 hours, then reset and re-post for the appropriate Work date.

601-3.5.1 General. To the "WHITEBOOK", item 3, DELETE in its entirety and SUBSTITUTE with the following:

3. Temporary "No Parking" and "No Stopping" signs shall be installed 72 hours before enforcement. Temporary "No Parking" and "No Stopping" signs shall be installed and removed as specified in the Special Provisions. Signs shall indicate specific days, dates, and times of restrictions. If violations occur, call Police Dispatch 619-531-2000 to enforce the Tow-Away notice.

SECTION 1001 – CONSTRUCTION BEST MANAGEMENT PRACTICES (BMPs)

1001-1 GENERAL. To the "WHITEBOOK", ADD the following:

7. Based on a preliminary assessment by the City, this Contract is subject to **WPCP**.
-

TECHNICALS

CITY HEIGHTS POOL RECONSTRUCTION

4380 LANDIS STREET, SAN DIEGO, CA 92105

SPECIFICATIONS

08/19/2019

PLATT/WHITELAW ARCHITECTS, INC.
4034 30TH STREET, SAN DIEGO, CALIFORNIA 92104
619 546-4326



CITY HEIGHTS POOL
RECONSTRUCTION
4380 LANDIS STREET, SAN DIEGO, CA 92105

TECHNICAL SPECIFICATIONS

Division	Section Title
----------	---------------

DIVISION 01 - GENERAL REQUIREMENTS

01 10 00 SUMMARY

DIVISION 05 - METALS

05 73 00 ORNAMENTAL ALUMINUM RAILINGS

DIVISION 13 - SPECIAL CONSTRUCTION

13 11 00 SWIMMING POOL GENERAL REQUIREMENTS
13 11 01 SWIMMING POOL EXCAVATION
13 11 02 SWIMMING POOL CONCRETE
13 11 03 SWIMMING POOL SHOTCRETE
13 11 04 SWIMMING POOL CERAMIC TILE
13 11 05 SWIMMING POOL PLASTER
13 11 06 SWIMMING POOL EQUIPMENT
13 11 07 SWIMMING POOL MECHANICAL
13 11 08 SWIMMING POOL ELECTRICAL
13 31 00 FABRIC STRUCTURES

DIVISION 26 - ELECTRICAL

26 05 19 LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES
26 05 23 CONTROL-VOLTAGE ELECTRICAL POWER CABLES
26 05 26 GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS
26 05 29 HANGERS AND SUPPORTS FOR ELECTRICAL SYSTEMS
26 05 33 RACEWAYS AND BOXES FOR ELECTRICAL SYSTEMS
26 05 43 UNDERGROUND DUCTS AND RACEWAYS FOR ELECTRICAL SYSTEMS
26 05 44 SLEEVES AND SLEEVE SEALS FOR ELECTRICAL RACEWAYS AND CABLING
26 05 48.16 SEISMIC CONTROLS FOR ELECTRICAL SYSTEMS
26 05 53 IDENTIFICATION FOR ELECTRICAL SYSTEMS
26 28 13 FUSES
26 28 16 ENCLOSED SWITCHES AND CIRCUIT BREAKERS
26 29 13.03 MANUAL AND MAGNETIC MOTOR CONTROLLERS

END OF TABLE OF CONTENTS

SECTION 01 10 00 - SUMMARY

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Project information.
 - 2. Work covered by Contract Documents.
 - 3. Work performed by Owner.
 - 4. Contractor's use of site and premises.
 - 5. Coordination with occupants.
 - 6. Work restrictions.
 - 7. Specification and Drawing conventions.
 - 8. Miscellaneous provisions.
- B. Related Requirements:

1.3 PROJECT INFORMATION

- A. Project Identification: City Heights Pool Reconstruction
 - 1. Project Location: 4380 Landis Street, San Diego, CA 92105
- B. Owner: City of San Diego.
 - 1. Project manager: Parita Ammerlahn, Public Works, 525 B Street, Suite 750, MS#////, San Diego, CA 92101. (619) 533-5406
- C. Architect: Platt/Whitelaw Architects, Inc., 4034 30th Street, San Diego, CA 92104. (619) 546-4326

1.4 CONTRACT

- 1. Project will be constructed under a single prime contract.

1.5 CONTRACTOR'S USE OF SITE AND PREMISES

- A. Unrestricted Use of Site: Contractor shall have full use of Project site, within the limits of work, for construction operations during construction period. The pool will be closed, however, the adjacent Park & Rec/Swim Center building will remain in partial use by Park & Rec Staff and community meetings. In addition, the adjacent park will remain in public use.

1.6 COORDINATION WITH OCCUPANTS

- A. Partial Owner Occupancy: Owner will occupy the adjacent premises during entire construction period. Cooperate with Owner during construction operations to minimize conflicts and facilitate Owner usage. Perform the Work so as not to interfere with Owner's operations. Maintain existing exits unless otherwise indicated.
 - 1. Maintain access to existing walkways, and other adjacent occupied or used facilities. Do not close or obstruct walkways, or other occupied or used facilities without written permission from Owner and authorities having jurisdiction.
 - 2. Provide not less than 72 hours' notice to Owner of activities that will affect Owner's operations.
- B. Comply with restrictions on construction operations.
 - 1. Comply with limitations on use of public streets, alley and fire lane rights of way, and other requirements of authorities having jurisdiction.
 - a. Fire access width of 13 feet to the east side of the site shall always be maintained.
- C. On-Site Work Hours: Limit work to hours indicated in the General Provisions unless otherwise indicated. Work hours may be modified to meet Project requirements if approved by Resident Engineer and authorities having jurisdiction.
- D. Existing Utility Interruptions: Do not interrupt utilities serving facilities occupied by Owner or others unless permitted under the following conditions and then only after arranging for temporary utility services according to requirements indicated:
 - 1. Notify Resident Engineer not less than seven days in advance of proposed utility interruptions.
 - 2. Obtain Resident Engineer's written permission before proceeding with utility interruptions.
- E. Noise, Vibration, Dust, and Odors: Coordinate operations that may result in high levels of noise and vibration, dust, odors, or other disruption to Owner occupancy with Resident Engineer.
 - 1. Notify Resident Engineer not less than seven days in advance of proposed disruptive operations.
 - 2. Obtain Resident Engineer's written permission before proceeding with disruptive operations.
- F. Smoking and Controlled Substance Restrictions: Use of tobacco products and other controlled substances on Owner's property is not permitted.

1.7 SPECIFICATION AND DRAWING CONVENTIONS

- A. Specification Content: The Specifications use certain conventions for the style of language and the intended meaning of certain terms, words, and phrases when used in particular situations. These conventions are as follows:
1. Imperative mood and streamlined language are generally used in the Specifications. The words "shall," "shall be," or "shall comply with," depending on the context, are implied where a colon (:) is used within a sentence or phrase.
 2. Specification requirements are to be performed by Contractor unless specifically stated otherwise.
- B. Drawing Coordination: Requirements for materials and products identified on Drawings are described in detail in the Specifications. One or more of the following are used on Drawings to identify materials and products:
1. Terminology: Materials and products are identified by the typical generic terms used in the individual Specifications Sections.
 2. Abbreviations: Materials and products are identified by abbreviations published as part of the U.S. National CAD Standard.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 011000

SECTION 05 73 00 - ORNAMENTAL ALUMINUM RAILING

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Ornamental Aluminum Railing.

1.2 REFERENCES

- A. ASTM B 211 - Standard Specification for Aluminum and Aluminum-Alloy Bar, Rod, Wire.
- B. ASTM B 247 - Standard Specification for Aluminum and Aluminum Die Forgings, Hand Forgings and rolled Ring Forgings.
- C. ASTM E 935 - Standard Test Methods for Permanent Metal Railing Systems and Rails for Buildings.

1.3 DESIGN / PERFORMANCE REQUIREMENTS

- A. Comply with requirements of building authorities having jurisdiction in Project location and the following:
 - 1. Handrail Standard: ANSI A1264.1
- B. Structural Performance: Engineer, fabricate, and install handrails, guardrails, and railing systems to withstand, when tested per ASTM E 935, loadings required by applicable building and safety codes but not less than the following:
- C. Design Loads: Design to the following requirements. Concentrated and uniform loading need not be applied simultaneously.
 - 1. Uniform load: 50 pounds per foot (74.3 kg/m) applied at the top in any direction.
 - 2. Concentrated load: 200 pounds (90.6 kg) applied at the top in any direction.

1.4 SUBMITTALS

- A. Submit under provisions of Section 01300.
- B. Product Data: Manufacturer's data sheets on each product to be used, including:
 - 1. Preparation instructions and recommendations.
 - 2. Details of material and construction. ^[1]_{SEP}
 - 3. Storage and handling requirements and recommendations.

4. Installation methods and requirements.
- C. Shop Drawings: Submit shop drawings for fabrication and installation of ornamental metalwork. Include plans, elevations and detail sections. Indicate materials, methods, finishes and types of joinery, fasteners, anchorages and accessory items.
- D. Load Tests: Submit test results from ASTM E 935 conducted on the manufacturer's supplied system indicating compliance with required structural loading.
- E. Selection Samples: For each finish product specified, two complete sets of color charts representing manufacturer's full range of available colors and patterns.
- F. Manufacturer's Certificates: Certify products meet or exceed specified requirements.
- G. Closeout Submittals: Provide manufacturer's maintenance instructions that include recommendations for periodic cleaning and maintenance of all components.

1.5 QUALITY ASSURANCE

- A. Manufacturer shall have been successfully engaged in the respective product prior to commencement of the work.
- B. Mock-Up: Provide a mock-up for evaluation of surface preparation techniques and application workmanship.
 1. Finish areas designated by Architect.
 2. Do not proceed with remaining work until workmanship, color, and sheen are approved by Architect.
 3. Refinish mock-up area as required to produce acceptable work.
 4. Accepted mock-ups shall be comparison standard for remaining Work

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Store products in manufacturer's unopened, properly labeled, original packaging until ready for installation.
- B. Store components to avoid damage from moisture, abrasion, and other construction activities.

1.7 SEQUENCING

- A. Ensure that products of this section are supplied to affected trades in time to prevent interruption of construction progress.

1.8 PROJECT CONDITIONS

- A. Maintain environmental conditions (temperature, humidity, and ventilation) within limits recommended by manufacturer for optimum results. Do not install products under environmental conditions outside manufacturer's absolute limits.
- B. Field Measurements: Take measurements of actual dimensions where necessary for fit without gaps. Indicate measurements on shop drawings.

PART 2 PRODUCTS

2.1 MANUFACTURERS

- A. Basis of design Manufacturer: Superior Aluminum Products, Inc.; 555 E. Main St., P. O. Box 430, Russia, OH 45363. Phone: 937-526-4065. Fax: 937-526-3904. Email: info@superioraluminum.com. Web: www.superioraluminum.com.
- B. Or equal.

2.2 ORNAMENTAL ALUMINUM RAILINGS

- A. Guard Rail Series 9000 Heavy-Duty Aluminum Railing: Series 9000 railings run between posts which shall contain machined openings for level applications. Pickets shall be 3/4 inch (1.91 cm) square on 4-1/2 inch (11.43 cm) maximum centers, and shall run between the top and bottom rail. Picket fasteners are concealed by a screw cover in matching finish.
 - 1. Series 9000 Design
 - a. Rail Style: Single top and bottom rail, two-line railing system.
 - 1) Top Rail Size
 - (a) Standard 2 inch (5.08 cm) wide by 1-5/8 inch (4.13 cm) high top rail.
 - 2) Bottom Rail Size
 - (a) Standard 3/4 inch (1.91 cm) wide by 1-5/8 inch (4.13 cm) high bottom rail.
 - b. Square Posts:
 - 1) 2-1/2 inch (10.16cm)
 - c. Height:
 - 1) 42 inch (106.68 cm)
 - d. Design
 - 1) Design: As indicated on the Drawings.
 - e. Base: Size to fit the posts specified
 - f. Cover Flange for Embedded Posts
 - g. All fasteners used in the system shall be aluminum or stainless steel.

2.3 RAILING MATERIALS

- A. Rail, Post and Pickets: Aluminum extrusions; alloy and temper 6063-T4 or 6063-T6 for rail and posts, and 6063-T5 for square pickets.
 - 1. Tube: ASTM B 211.
- B. Base Flanges, Anchors, and railing accessories: ASTM B 247.
 - 1. Bases cast from manufacturer's standard A-356-T6, 535, or 713 aluminum alloys or solid extruded 6063 aluminum alloy stock.
 - 2. Base flanges and railing accessories cast from manufacturer's standard 319, A-356, A-356-T6, 535, or 713 aluminum alloys.
- C. Grout: Non-shrink Portland cement-based hydraulic grout, mixed and applied in accordance with manufacturer's instructions; gypsum based material are not acceptable. Provide formulation that is resistant to erosion from water exposure without needing protection by a sealer or waterproof coating and recommended by manufacturer for exterior pool deck use.

2.4 FINISH

- A. Baked on Enamel Colors (AAMA 2603):
 - 1. As selected by Architect from standard color range

2.5 FABRICATION

- A. All components or railing sections shall be fabricated at the manufacturing facility in largest practical site delivery sizes. All components or railing sections shall be fabricated to exact measurements specified through Drawings and field dimensions.
- B. All posts grouted in concrete to have one nominal 1/4 inch (6.0 mm) nominal diameter weep hole, 1/2 inch (12.0 mm) nominal above post collar, in the plane of the rail
- C. Provide components required for anchorage of framing. Fabricate anchors and related components of material and finish as required, or as specifically noted.
- D. Provide coring and matching mounting plates and backings as noted, suitable to receive specified custom finish hardware.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Do not begin installation until substrates have been properly prepared.

- B. If substrate preparation is the responsibility of another installer, notify Resident Engineer of unsatisfactory preparation before proceeding.

3.2 PREPARATION

- A. Clean surfaces thoroughly prior to installation.
- B. Ensure that adjacent surfaces, structures, and finishes are protected from damage by construction activities of this section.
- C. Use wood blocks and padding to prevent damage to railing members and fittings during erection
- D. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.

3.3 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Keep perimeter lines straight, plumb, and level.
- C. Provide grounds, clips, adhesives, brackets, anchors, and accessories necessary for a complete installation.
 - 1. Sleeve Mounting:
 - a. Arrange for casting of sleeves or core drill concrete to provide holes for railing uprights.
 - b. After setting, fill holes with hydraulic grout; brace members until grout is cured.
 - 2. Connect railing components in accordance with manufacturer's instructions applicable to the specified system. Tighten all fasteners so that completed railing is rigid and free of play at joints and component attachments.

3.4 ERECTION TOLERANCES

- A. Install railings plumb and level, securely fastened, with vertical members plumb.
 - 1. Maximum variation from plumb: 1/4 inch (6.0 mm).
 - 2. Maximum misalignment from true position: 1/4 inch (6.0 mm).
 - 3. Maximum misalignment between adjacent separated members: 1/8 inch (3.0 mm).

3.5 CLEANING

- A. Remove dust or other foreign matter from component surfaces; clean finishes in accordance with AAMA 609 and AAMA 610-02.

3.6 PROTECTION

- A. Protect installed products until completion of project.
- B. Touch-up, repair or replace damaged products before Substantial Completion.

END OF SECTION 01 73 00

SECTION 131100 – SWIMMING POOL GENERAL REQUIREMENTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and 2018 Greenbook and City of San Diego “Whitebook”, apply to this section.

1.2 WORK INCLUDED

- A. The scope of the work included under this Section of the Specifications shall include swimming pool(s) as illustrated on the Drawings and specified herein. The General and Supplementary Conditions of the Specifications shall form a part and be included under this Section of the Specifications. The Swimming Pool Subcontractor shall provide all supervision, labor, material, equipment, machinery, plant and any and all other items necessary to complete the work. ALL OF THE WORK IN SECTIONS 131100 – 131108 IS TO BE THE RESPONSIBILITY OF ONE EXPERIENCED SWIMMING POOL SUBCONTRACTOR PRIMARILY ENGAGED IN THE CONSTRUCTION OF COMMERCIAL PUBLIC-USE SWIMMING POOLS, A MINIMUM SIZE OF 6,000 SQUARE FEET OF WATER SURFACE AREA WITH A CONCRETE AND CERAMIC TILE PERIMETER OVERFLOW GUTTER AND SELF-MODULATING BALANCE TANK. The Swimming Pool Subcontractor shall furnish and install the swimming pool structures, finishes, cantilever forming, swimming pool mechanical and electrical systems, and all accessories necessary for a complete, functional swimming pool system, as herein described. Work shall include start-up, instruction of Owner’s personnel, as-built drawings and warranties as required.

1.3 CODES, RULES, PERMITS, FEES

- A. The swimming pools shall be constructed in strict accordance with the applicable provisions set forth by authorities having jurisdiction over swimming pool construction and operation in the State of California.
- B. The Swimming Pool Subcontractor shall give all necessary notices, obtain all permits, and pay all government sales taxes, fees, and other costs in connection with his work; file all necessary plans, prepare all documents and obtain all necessary approvals of governmental departments having jurisdiction; obtain all required certificates of inspection for his work and deliver same to the Designated Representative before request for acceptance and final payment for the work.
- C. The Swimming Pool Subcontractor shall include in the work any labor, materials, services, apparatus, or drawings in order to comply with all applicable laws, ordinances, rules and regulations, whether or not shown on Drawings and/or specified.

- D. The Contractor shall submit all required documents and materials to all Governmental Departments having jurisdiction for any deferred approval items or substituted materials or products to obtain final approval to installation.

1.4 DESCRIPTION OF WORK

- A. Furnish and perform supervision, coordination, all layout, formwork, excavation, hand trim, disposing off-site of all unused material or debris to complete the swimming pool excavation to the dimensions shown on the plans.
- B. Furnish and install complete swimming pool structures, including reinforcing steel and cast-in-place or pneumatically placed concrete walls and floors.
- C. Furnish and install swimming pool finishes, including ceramic tile and marble plaster or other waterproof finishes.
- D. Furnish and install complete swimming pool mechanical system(s), including, but not limited to, circulation systems, filtration systems, pool water heating systems, water chemistry control systems, domestic water fill line systems, booster pump and special effects systems, and all pumps, piping, valves, and connections between system(s) and swimming pool(s).
- E. Furnish and install complete swimming pool electrical system(s) from P.O.C. in Mechanical Room, including, but not limited to, underwater lighting systems, water level control systems, timing systems, scoreboards, special effects systems, control circuitry, motor starters, time clocks, bonding, and all conduits, conductors, contactors, and switches between the system(s) and swimming pool(s).
- F. Furnish and install all swimming pool cantilever forming, deck equipment and required anchors and inserts for the specified equipment as required by code, shown on the Drawings and specified herein.
- G. After the initial filling of the swimming pool system(s), should any repairs, continuing work, or other Subcontractor responsibility require drainage or partial drainage of the swimming pool systems, the Swimming Pool Subcontractor shall be responsible for any subsequent refilling and shall complete the project with the swimming pool system(s) full of water, water in chemical balance, complete in every way, and in full operation.

1.5 ASSIGNED RESPONSIBILITIES AND RELATED WORK

- A. It is the intent of this section of the Specifications to clarify Work responsibilities of the trades directly and indirectly involved in construction of the pool systems. All labor, equipment, materials and supplies furnished by the Swimming Pool Subcontractor and other Subcontractors shall be as directed by the Owner through his Designated Representative.
- B. THE SWIMMING POOL SUBCONTRACTOR SHALL NOT SUBCONTRACT ANY PORTION OF THE SWIMMING POOL CONSTRUCTION OR SWIMMING POOL EQUIPMENT INSTALLATION TO ANYONE OTHER THAN A SUBCONTRACTOR THAT SATISFIES THE REQUIREMENTS OF SECTION 131100.

- C. References to “swimming pool systems” shall include the swimming pools, equipment, and accessories.
- D. The Owner will provide one complete water filling of the swimming pool(s), but will not assume any responsibility for the swimming pool system(s) until they have been proved fully operational, complete in every way and accepted by the Designated Representative.

1.6 RESPONSIBILITIES OF THE CONTRACTOR

- A. The Contractor shall grade the swimming pool site(s), establish benchmarks, cut and fill as necessary to provide as level an area as possible at swimming pool deck elevation before swimming pool layout.
- B. The Contractor shall be responsible for horizontal dimensions and grade elevations accurately from established lines and benchmarks (as indicated on the Drawings) and be responsible for those grades.
- C. The Contractor shall provide adequate temporary light, electric power, heat and ventilation per Federal and State OSHA requirements to construct the swimming pool system(s).
- D. The Contractor shall not permit any heavy equipment activity over any area or within five (5) feet of any area under which swimming pool piping is buried. There shall be no exceptions to this requirement.
- E. The Contractor shall keep the swimming pool excavation(s) and swimming pool structure(s) free of construction residue and waste materials of his workmen or Subcontractors, removing said material from the swimming pools as required.
- F. The Contractor shall protect the swimming pool(s) from damage caused by his construction equipment and /or workmen and Subcontractors.
- G. The Contractor shall provide a representative at time of swimming pool start-up to coordinate all trades related to swimming pool system(s).

1.7 RESPONSIBILITIES OF THE MECHANICAL SUBCONTRACTOR

- A. The Mechanical Subcontractor shall be licensed in the State of California and provide written notifications to Swimming Pool Subcontractor and contractor when necessary to excavate and backfill within the swimming pool construction site.
- B. The Mechanical Subcontractor shall not utilize any swimming pool piping trench for installation of any sanitary sewer, storm sewer, domestic water, hot water, chilled water or natural gas line.
- C. The Mechanical Subcontractor shall furnish and install all sanitary sewer piping, including vent stacks (if necessary), for backwash pits, floor drains and floor sinks as required by code, shown on Drawings, and herein specified.

- D. The Mechanical Subcontractor shall furnish and install all storm sewer piping and site drainage systems as required by code, shown on the Drawings, and herein specified.
- E. The Mechanical Subcontractor shall provide a minimum 75 psi water supply for swimming pool construction work within fifty (50) feet of the swimming pool construction site(s).
- F. The Mechanical Subcontractor shall furnish and install reduced pressure backflow protected domestic water lines to P.O.C. within swimming pool Mechanical Room as required by code, shown on the Drawings, and herein specified.
- G. The Mechanical Subcontractor shall furnish and install natural gas piping, pressure regulation and valving to P.O.C. within swimming pool Mechanical Room as required by code, shown on the drawings, and herein specified.
- H. The Mechanical Subcontractor shall furnish and install all ductwork, louvers, and all HVAC equipment within swimming pool Mechanical Room as required by code, shown on the Drawings, and herein specified.
- I. The Mechanical Subcontractor shall provide a representative at time of swimming pool start-up to coordinate work related to swimming pool system(s).

1.8 RESPONSIBILITIES OF THE ELECTRICAL SUBCONTRACTOR

- A. The Electrical Subcontractor shall be licensed in the State of California and shall furnish and install electrical service to swimming pool Mechanical Room sized to accommodate all necessary swimming pool equipment as shown on the Drawings and herein specified.
- B. The Electrical Subcontractor shall furnish any temporary power needed by the Swimming Pool Subcontractor within fifty (50) feet of the swimming pool construction site(s).
- C. The Electrical Subcontractor shall furnish and install all conduits, conductors, starters/disconnects, panels, circuits, switches and equipment as required for lighting, ventilation and HVAC equipment within swimming pool Mechanical Room as required by code, shown on the Drawings, and herein specified.
- D. The Electrical Subcontractor shall furnish and install all conduits, conductors, panels, circuits, switches and equipment for area lighting as required by code, shown on the Drawings, and herein specified.
- E. All equipment, material and installation shall be as required under Division 16 of the Specifications and shall conform to NEC Article 680 (latest revision), State and Local Codes, and as may be required by all authorities having jurisdiction over swimming pool construction within the State of California.
- F. The Electrical Subcontractor shall provide a representative at time of swimming pool start-up to coordinate work related to swimming pool system(s).

1.9 INTENT

- A. It is the intention of these specifications and Drawings to call for finished work, tested and ready for operation. Wherever the work “provide” is used, it shall mean “furnish and install complete and ready for use.”
- B. Minor details not usually shown or specified, but necessary for proper installation and operation, shall be included in the work, the same as if herein specified or shown.

1.10 SCHEDULE OF VALUES

- A. Provide a Schedule of Values for all work specified in each of the technical specifications listed in the table below, regardless of whether the work is performed by the swimming pool contractor or others. Values listed shall be fully burdened, with contractor general conditions, overhead, profit and bonds included. Payments for swimming pool work completed shall not be approved until Schedule of Values has been submitted to and approved by Architect.

SWIMMING POOL SCHEDULE OF VALUES			
No.	Section #	Description	Value
1.	131101	Swimming Pool Excavation	
2.	131102	Swimming Pool Concrete	
3.	131103	Swimming Pool Shotcrete	
4.	131104	Swimming Pool Ceramic Tile	
5.	131105	Swimming Pool Plaster	
6.	131106	Swimming Pool Equipment	
7.	131107	Swimming Pool Mechanical	
8.	131108	Swimming Pool Electrical	
9.	131413	Fiberglass Waterslide	
Total			

1.11 SUBMITTAL PROCEDURES

- A. General: Electronic copies of CAD Drawings of the Contract Drawings will not be provided by Architect for Subcontractor's use in preparing submittals.
- B. Coordination: Coordinate preparation and processing submittals with performance construction activities.
 - 1. Coordinate each submittal with fabrication, purchasing, testing, delivery, other submittals, and related activities that require sequential activity. Coordinate transmittal of different types of submittals for related parts of the Work so processing will not be delayed because of need to review submittals concurrently for coordination.

- a. Architect reserves the right to withhold action on a submittal requiring coordination with other submittals until related submittals are received.
- C. Submittals Schedule: Comply with requirements in Division 1 Section "Construction Progress Documentation" for list of submittals and time requirements for schedules performance of related construction activities.
- D. Processing Time: Allow enough time for submittal review, including time for re-submittals as follows. Time for review shall commence on Architect's receipt of submittal.
 - 1. Initial Review: Allow fifteen (15) days for initial review of each submittal. Allow additional time if processing must be delayed to permit coordination with subsequent submittals. Architect will advise Contract when a submittal being processed must be delayed for coordination.
 - 2. Concurrent Review: Where concurrent review of submittals by Architect's consultants, Owner, or other parties is required, allow twenty-one (21) days for initial review of each submittal.
 - 3. Direct Transmittal to Consultant: Where the Contract Documents indicate that submittals may be transmitted directly to Architect's consultants, provide duplicate copy of transmittal to Architect. Submittal will be returned to Architect before being returned to Subcontractor.
 - 4. If intermediate submittal is necessary, process it in same manner as initial submittal.
 - 5. Allow fifteen (15) days for processing each submittal.
 - 6. No extension of the Contract Time will be authorized because of failure to transmit submittals enough in advance of the Work to permit processing.
- E. Identification: Place a title block on each submittal for identification.
 - 1. Indicate name of firm or entity that prepared each submittal on title block.
 - 2. Provide a space on title block to record Subcontractor's review and approval markings and action take by Architect.
 - 3. Include the following information on title block for processing and recording action taken: (See Attached Sample)
 - a. Project name.
 - b. Date.
 - c. Name and address of Subcontractor.
 - d. Name of Subcontractor.
 - e. Name of Supplier.
 - f. Name of Manufacturer.
 - g. Unique identifier, including revision number.
 - h. Number and title of appropriate Specification Section.
 - i. Drawing number and detail references, as appropriate.
 - j. Other necessary identification.

SUBMITTAL FOR:	SUBMITTAL TO:	SUBCONTRACTOR:
<hr/>		
<hr/>		
Item Number:	<hr/>	
Section Number:	<hr/>	
Section Description:	<hr/>	
Subcontractor:	<hr/>	
Supplier:	<hr/>	
Manufacturer:	<hr/>	
Product Code:	<hr/>	
Quantity:	<hr/>	
<hr/>		
Subcontractor Certification:		Contractor's Submittal Stamp:
<p>It is hereby certified that the equipment or material designated in this submittal is proposed to be incorporated in the above-named project and is in compliance with the contract drawings and / or specifications and is submitted for approval.</p> <p>Certified by: <hr/></p> <p>Date: <hr/></p> <p>Job <hr/></p> <p>Superintendent: <hr/></p> <p>Revisions: <hr/></p>		
<hr/>		
Architect's Review Stamp and Comments		

- F. Deviations: Highlight, encircle, or otherwise identify deviations from the Contract documents on submittal.
- G. On all catalogue or cut sheets identify which model or type is being submitted.
- H. Transmittal: Package each submittal individually and appropriately for transmittal and handling. Product data and shop drawings shall be packaged within a three-ring binder and colored samples shall be packaged on a heavy cardboard. Transmit each submittal using a transmittal form.
 - 1. On an attached separate sheet, prepared on Subcontractor's letterhead, record relevant information, request for data, revisions other than those requested by Architect on previous submittals and deviations from requirements of the Contract documents, including minor variations and limitations. Include the same label information as the related submittal.
 - 2. Include Subcontractor's certification stating that information submitted complies with requires of the Contract Documents.
 - 3. Transmittal Form: Provide locations on form for the following information:
 - a. Project name.
 - b. Date.
 - c. Destination (To:).
 - d. Source (From:).
 - e. Names of Subcontractor, manufacturer, and supplier.
 - f. Category and type of submittal.
 - g. Submittal purpose and description.
 - h. Remarks.
- I. Distribution: Furnish copies of final submittals to manufacturers, Subcontractors, suppliers, fabricators, installers, authorities having jurisdiction and others as necessary for performance of construction activities. Show distribution on transmittal forms.
- J. Use for Construction: Use only final submittals with mark indicating action taken by Architect in connection with construction.

1.12 SUBSTITUTIONS

- A. To obtain approval to use unspecified products, bidders shall submit requests for substitution at least ten (10) days prior to bid date. Requests shall only be considered if they clearly describe the product for which approval is asked, including all data necessary to demonstrate acceptability. All unspecified products and equipment will be considered on an "or equal" basis at the discretion of the Designated Representative. Requests for substitution received after the specified deadline will not be considered. Where a conflict exists between the requirements of the General Conditions / Special Conditions / Division 1 concerning substitutions and the requirements of this Article, this Article (Section 131100, Article 1.10) shall govern.

- B. Where the Swimming Pool Subcontractor proposes to use an item of equipment other than that specified or detailed on the Drawings which requires any redesign of the structure, partitions, foundations, piping, wiring, or any other part of the architectural, mechanical, or electrical layout, all such redesign and all new drawings (stamped by California Licensed Engineer) and detailing required shall be prepared by the Swimming Pool Subcontractor, at his own expense, submitted for review and approval by the Designated Representative prior to bid.
- C. Where such approved deviation requires a different quantity and arrangement of piping, supports and anchors, wiring, conduit, and equipment from that specified or indicated on the Drawings, the Swimming Pool Subcontractor shall furnish and install any such piping, structural supports, controllers, motors, starters, electrical wiring and conduit, and any other additional equipment required by the system, at no additional cost to the Owner.

1.13 SURVEYS AND MEASUREMENTS

- A. The Swimming Pool Subcontractor shall base all measurements, both horizontal and vertical, from benchmarks established by the Contractor. All work shall agree with these established lines and levels. The mechanical Drawings do not give exact details as to elevations of piping, exact locations, etc. and do not show all offsets, control lines, pilot lines and other installation details. Verify all measurements at site and check the correctness of same as related to the work.

1.14 DRAWINGS

- A. Drawings are diagrammatic and indicate the general arrangement of the systems and work included in the Subcontractor. Drawings are not to be scaled. The architectural drawings and details shall be examined for exact dimensions. Where they are not definitely shown, this information shall be obtained from the Designated Representative.

1.15 SWIMMING POOL SUBSUBCONTRACTOR

- A. The swimming pool construction work as herein described and specified in Division 13 of the Project Manual shall be the complete responsibility of a qualified and specifically licensed (C-53 license classification within the State of California) Swimming Pool Subcontractor with extensive experience in commercial public use swimming pool installations.
- B. The Contractor shall require the Swimming Pool Subcontractor to furnish to the Contractor performance and payment bonds in the amount of 100% of the Swimming Pool Subcontractor's bid written by a surety Company properly registered in the State of California and listed by the U.S. Treasury. The expense of the bond(s) is to be borne by the Subcontractor. The Contractor shall clearly specify the amount and requirements of the bond(s) in the Contractor's written or published request for subbids. The Contractor's written or published request for subbids shall also specify that the bond(s) expense is to be borne by the Subcontractor.
- C. Subcontractor certifies that it meets the qualifications and experience requirements established in Swimming Pool General Requirements, Section 131100, as follows:

1. All the work in sections 131100 - 131108 is to be the responsibility of one experienced swimming pool subcontractor primarily engaged in the construction of commercial public-use swimming pools, a minimum size of 6,000 square feet of water surface area with a concrete and ceramic tile perimeter overflow gutter and self-modulating balance tank.
 2. Name at least one project that meets the requirements of section (b) above and the contact as reference by the Contractor, the Awarding Authority of their agent or designee.
 - a. Owner: _____
Scope of Project: _____
Contact Person: _____
Phone Number: _____
Architect for Project: _____
 - b. Owner: _____
Scope of Project: _____
Contact Person: _____
Phone Number: _____
Architect for Project: _____
 - c. Owner: _____
Scope of Project: _____
Contact Person: _____
Phone Number: _____
Architect for Project: _____
 - d. Owner: _____
Scope of Project: _____
Contact Person: _____
Phone Number: _____
Architect for Project: _____
 - e. Owner: _____
Scope of Project: _____
Contact Person: _____
Phone Number: _____
Architect for Project: _____
- D. Swimming Pool Deck Subcontractor other than the swimming pool Subcontractor certifies that it meets the qualifications and experience requirements established in Swimming Pool General Requirements, Section 131100, as follows:
1. Subcontract shall have been successfully engaged on commercially designed cantilevered pool decks over perimeter gutters, each of which have incorporated a minimum size of 6,000 square feet of water surface area of the swimming pool.
 2. Name at least one project that meets the requirements of section (b) above and the contact as reference by the Contractor, the Awarding Authority of their agent or designee.
 - 3.

SWIMMING POOL DECK SUBCONTRACTOR

- a. Owner: _____
Scope of Project: _____
Contact Person: _____
Phone Number: _____
Architect for Project: _____
- b. Owner: _____
Scope of Project: _____
Contact Person: _____
Phone Number: _____
Architect for Project: _____
- c. Owner: _____
Scope of Project: _____
Contact Person: _____
Phone Number: _____
Architect for Project: _____
- d. Owner: _____
Scope of Project: _____
Contact Person: _____
Phone Number: _____
Architect for Project: _____
- e. Owner: _____
Scope of Project: _____
Contact Person: _____
Phone Number: _____
Architect for Project: _____

1.16 OPERATING INSTRUCTIONS

- A. The Swimming Pool Subcontractor shall determine from actual samples of pool water supplied by the Owner, the proper water management program necessary for maximum operating efficiency and comfort. The Swimming Pool Subcontractor shall provide the services of experienced personnel familiar with this type of pool system operation, in conformance with Section 13 11 05 of the Specifications.

1.17 MAINTENANCE MANUALS

- A. The Swimming Pool Subcontractor shall provide six (6) bound sets for delivery to the Designated Representative of instructions for operating and maintaining all systems and equipment included in this Contract. Manufacturer's advertising literature or catalog pictures will not be acceptable for operating and maintenance instructions.

- B. Bound in ring binders shall be all parts lists, periodic maintenance instructions and troubleshooting guidelines for all pool equipment, including but not limited to filters, pumps, controllers, water chemistry control equipment, etc.

1.18 SECURE FROM THE OWNER

- A. A complete Owner-furnished filling of the swimming pools.
- B. The Owner's assistance, as specified herein, from the time of start-up until final written acceptance of the swimming pool system(s).
- C. Chemicals as required for swimming pool operation after Swimming Pool Subcontractor completes initial water chemistry balance and water treatment during the maintenance period described in Section 131105 of the Specifications.

1.19 WARRANTY

- A. The Swimming Pool Subcontractor shall warrant all swimming pool structures, finishes and systems against defects in material and workmanship for a period of one year after the date of acceptance by the Owner. Any repair or replacement required due to defective material or workmanship will be promptly corrected by the Swimming Pool Subcontractor.

PART 2 - PRODUCTS

NOT USED

PART 3 - EXECUTION

NOT USED

END OF SECTION

SECTION 131101 – SWIMMING POOL EXCAVATION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and 2018 Greenbook and City of San Diego “Whitebook”, apply to this section.

1.2 DESCRIPTION

- A. Finish and fine grading to bring the surface of the ground to the required grades and elevations as indicated on the Drawings.
- B. Subgrade improvements and placing of compacted fills.
- C. Excavation and backfill for all swimming pool, pool deck and surge chamber structural, including footings, foundations, slabs and walls.

1.3 QUALITY ASSURANCE

- A. Requirements of Regulatory Agencies: Conform with requirements of the General Conditions, and more specifically the following:
 - 1. Comply with California Building Code, latest edition.
 - 2. Comply with applicable construction safety orders, latest edition, Federal and State OSHA.
 - 3. Comply with applicable trench safety provisions, latest edition, Federal and State OSHA.
- B. Qualifications of Workers:
 - 1. The entity performing the work of this Section shall have been successfully engaged in the respective trade prior to commencement of the Work.
 - 2. For actual construction operations, use only trained and experienced workers with the materials and methods specified.
 - 3. Provide at least one person who shall be present at all times during execution of the work of this Section, with the type of materials being installed, the referenced standards, and who shall direct all Work performed under this Section.
- C. Project/Site Conditions:
 - 1. Be familiar with site and subsurface conditions.
 - 2. Excavation is unclassified and includes excavation to sub-grade elevations indicated or necessary, regardless of character of materials and obstructions encountered.

3. Provisions for mitigation of wet soils due to seepage or rain shall be made during excavation and throughout construction. If wet soils are encountered within the swimming pool excavations, de-watering shall be provided and the Geotechnical Engineer shall make recommendations for moist soil mitigation.
4. Where slope instability is encountered, all excavations within those areas shall be 1:1 or flatter. Forming of vertical walls may be necessary, and all soil conditions shall be field verified by the Geotechnical Engineer.
5. Contractor shall review the Geotechnical Investigation Report as furnished by the Owner's Representative to determine the suitability of the soils.

D. Adverse Weather Conditions:

1. During the periods when site soil moisture content is substantially in excess of moisture content required for optimum compaction, do not perform fill compaction.
2. When unfavorable weather conditions necessitate interrupting filling and grading operations, prepare areas by compaction of surface and grading to avoid collection of water. Provide adequate temporary drainage to prevent erosion.

1.4 SUBMITTALS AND SUBSTITUTIONS

- A. Provide submittals in conformance with requirements of Section 013300.
- B. Required submittals include:
 1. Offsite fill material, if applicable.
- C. Submit proof of qualifications as specified in Article 1.2.A of this Section

1.5 EXCAVATING & TRENCHING, GENERAL REQUIREMENTS

- A. Refer to Section 015500, Temporary Facilities and Controls.
- B. All trenches, holes, etc. are to be completely protected using solid barricades, steel plates, and plywood both during construction and during off hours, including night time.
- C. Flashing warning light barricades are required on sidewalks, roads, and any other critical areas that require night time protection.
- D. Roads, paths and sidewalks shall not be blocked at any time or in any way. Trenching across roads, paths or sidewalks involves special instructions and review of the construction procedure by the Owner's Representative at least three (3) days prior to the Work actually being started.
- E. Construction equipment, including all trucks, cars, etc. shall not be parked or driven on roads, paths or sidewalks. Items not allowed on roads, paths or sidewalks include hoses, power cords, ropes, construction materials, dirt and debris, etc.
- F. All roads, paths and sidewalks must remain clear and the Contractor shall maintain temporary safe and effective pedestrian access at all times.

- G. Drawings show existing major underground utilities using the best information available. The Contractor shall also fully check public works reference drawings prior to excavation. Call local Dig Alert to locate utilities to ensure safety.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Fill Material, General: All material shall be subject to the review of the Geotechnical Engineer to determine acceptability.
- B. Soils derived from on-site excavations are anticipated to generate gravel, cobbles, and oversize pieces of cemented sandstone. On-site soils may be suitable for reuse as engineered fill, provided they are processed in accordance with the following recommendations. Additional processing and handling of materials including screening and crushing should be anticipated. Engineered fill soils shall be comprised of granular soils with a very low to low expansion potential (i.e. an expansion index [EI] of 50 or less), and possess an organic content of less than approximately 3 percent by volume (or 1 percent by weight). In general, engineered fill material shall not contain rocks or lumps over approximately 3 inches in diameter, and not more than approximately 30 percent larger than ¾ inch. Oversize materials comprising the Normal Heights Mudstone shall not be utilized as engineered fill.
- C. Imported fill material, if needed, shall be granular soils with a very low to low expansion potential (i.e. an expansion index [EI] of 50 or less). Import material shall also be non-corrosive in accordance with the Caltrans (2018) corrosion guidelines and American Concrete Institute (ACI) 318. Materials for use as fill shall be evaluated by the Soils Engineer representative prior to filling or importing. To reduce the potential of importing contaminated materials to the site, prior to delivery, soil materials obtained from off-site sources shall be sampled and tested in accordance with standard practice (Department of Toxic Substances Control [DTSC], 2001). Soils exhibit a known risk to human health, the environment, or both, shall not be imported to the site.

PART 3 - EXECUTION

3.1 INSPECTION

- A. Verify drawing dimensions and elevations with actual field conditions. Inspect related Work and adjacent surfaces and report discrepancies and conditions which prevent proper execution of the Work to the Owner's Representative.

3.2 SUBGRADE IMPROVEMENTS

- A. The existing fill soils and the upper portions of the very old paralic deposits shall be removed down to the competent sandstone and conglomerate materials of the very old paralic deposits. Based on geotechnical evaluation, these excavations shall extend to a depth of 3 feet below the bottom of the new pool shell. These removals shall extend a lateral distance of 3 feet or more beyond the pool shell. The extent and depth of removals and overexcavations shall be evaluated

by the Soils Engineer's representative in the field to observe that the upper soils have been sufficiently removed.

- B. The resulting surface shall be scarified to a depth of approximately 8 inches, moisture conditioned, and recompact to a relative compaction of 90 as evaluated by the ASTM D 1557 prior to placing new fill. Once the resulting removal surface has been recompact, the overexcavation shall be backfilled with generally granular soils that possess a very low to low expansion potential (i.e. an expansion index [EI] less than 50). These materials can consist of the soils derived from on-site excavations that have been adequately processed to meet the fill soils characteristics.
- C. Prior to placement of compacted fill, the contractor shall request an evaluation of the exposed ground surface by the Soils Engineer. Unless otherwise recommended, the exposed ground surface shall then be scarified to a depth of approximately 8 inches and watered or dried, as needed, to achieve moisture contents generally at or slightly above the optimum moisture content. The scarified materials shall then be compacted to a relative compaction of 90 percent as evaluated in accordance with the ASTM D 1557.
- D. Fill materials shall be moisture conditioned to generally at or slightly above the laboratory optimum moisture content prior to placement. The optimum moisture content will vary with material type and other factors. Moisture conditioning of fill soils shall be generally consistent with the soil mass.
- E. Prior to placement of additional compacted fill material following a delay in the grading operations, the exposed surface of previously compacted fill should be prepared to receive fill. Preparation may include scarification, moisture conditioning, and recompact.
- F. Compacted fill shall be placed in horizontal lifts of approximately 8 inches in loose thickness. Prior to compaction, each lift should be watered or dried as needed to achieve a moisture content generally at or slightly above the laboratory optimum, mixed, and then compacted by mechanical methods to relative compaction of 90 percent as evaluated by ASTM D 1557.

3.3 EXCAVATION

- A. Checking Layout: Contractor shall, before commencing the excavation work, check all lines, stakes and levels for dimensions, angles, elevations and grades with the survey.
- B. Except where extra excavation is directed by the Owner's Representative or Geotechnical Engineer, excavations made to a greater depth or size than indicated or required shall be filled with concrete or shotcrete as specified in Sections 131102 / 131103.
- C. Dimensions: Excavate to proper dimensions as shown, cut square and smooth with firm level bottoms. Prepared excavations shall be approved by Geotechnical Engineer. Excavations shall be free of loose or disturbed materials.
- D. Excess Water Control: Keep all excavations free from standing water by pumping, draining or providing proper protection against water intrusion. If soil becomes soft, soggy or saturated, perform additional excavation to firm soil not affected by water.

- E. Form Removal: Make all excavations of sufficient size to permit installation and removal of forms and all other required work.
- F. Alternate Forming: Sides of structures may be formed by neat excavations where banks will stand without caving. If banks cave, provide forming as required and widen excavation to permit forming, bracing and inspection. Provide forming in conformance with Section 131102 and all recognized safety standards.

3.4 BACKFILLING

- A. Method: After concrete has been placed, forms removed and concrete work approved, backfill the excavations with earth to indicated or required grades. Carry on backfilling simultaneously on each side of walls or grade beams. Remove all rubbish and wood from the excavations before placing backfill.
- B. Concrete Protection: Prior to placing any backfill, adequately cure all concrete and provide any bracing required to ensure the stability of the structure. Protect waterproofing and dampproofing against damage in a manner acceptable to the Owner's Representative. Remove bracing as backfill operations progress.
- C. Material: Use the material from the excavations for backfilling, subject to approval by Soils Testing Agency. The earth shall be free from debris, large clods or stones.
- D. Lifts: Place backfill in six (6) inch loose layers, bring to optimum moisture content and compact to ninety percent (90%) of maximum density, sloping down and away from the structures being backfilled.
- E. Moisture: Rigidly control the amount of water used to ensure optimum moisture conditions for the type of fill material used. Excessive amounts of water causing saturation of earth will not be permitted. Compaction by flooding or jetting is prohibited.

3.5 GRADING

- A. Slopes: Grade to finish grades indicated on Drawings, with uniform slopes between all points.
- B. Subgrades: Blade to required grade and roll or tamp subgrades for exterior slabs, decks and paving.

3.6 CLEAN-UP

- A. Disposal: Haul away rubbish, debris, and rocks from site promptly and dispose of legally. Burning rubbish on site is prohibited.
- B. Dust and Noise Abatement: During entire period of construction keep area and material being loaded sprinkled to reduce dust in air and annoyance to premises and surrounding property.

END OF SECTION

SECTION 131102 - SWIMMING POOL CONCRETE

PART 1 GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and 2018 Greenbook and City of San Diego “Whitebook”, apply to this section.

WORK INCLUDED

- A. Forming for cast-in-place concrete and shotcrete associated with swimming pools.
- B. Reinforcement for cast-in-place concrete and shotcrete associated with swimming pools.
- C. Cast-in-place concrete for swimming pool structures. Do not use waterproofing admixture of any kind.
- D. Provide labor, materials and equipment as required to install sealant for all pool deck expansion joints, or any other caulking, as indicated on the aquatic Drawings and herein specified.

1.2 QUALITY ASSURANCE

- A. Qualifications of Workers:
 - 1. The entity performing the work of this Section shall have been successfully engaged in the respective trade prior to commencement of the Work.
 - 2. For actual construction operations, use only trained and experienced workers with experience with the materials and methods specified.
 - 3. Provide at least one person who shall be present at all times during execution of the work of this Section, with experience with the type of materials being installed, the referenced standards, and who shall direct all Work performed under this Section.
- B. Standards:
 - 1. In addition to complying with the California Building Code (latest edition), comply with all pertinent recommendations contained in "Recommended Practice for Concrete Formwork," Publication ACI 347-78 of the American Concrete Institute.
 - 2. In addition to complying with California Building Code (latest edition), comply with all pertinent recommendations contained in “Manual of Standard Practice for Detailing Reinforced Concrete Structures,” Publication ACI 315-74 of the American Concrete Institute.
 - 3. In addition to complying with all local codes and regulations, comply with all pertinent

recommendations contained in American Society for Testing and materials (ASTM);
ASTM C 920 "Standard Specification for Elastometric Joint Sealants."

- C. Tolerances: Construct all swimming pool concrete straight, true, plumb and square within a tolerance horizontally of one in 200 and vertically of one in 2000.

1.3 SUBMITTAL AND SUBSTITUTIONS

- A. Provide submittals in conformance with the requirements of Section 013300.
- B. Samples and Certificates, Concrete Reinforcement:
 - 1. Provide all data and access required for testing as described in Section 014500 of the Specifications.
 - 2. All material shall bear mill tags with heat number identification. Mill analysis and report shall be made available upon request.
 - 3. Material not so labeled and identifiable may be required by the Owner to be tested by the testing laboratory selected by the Owner and at no additional cost to the Owner, in which case random samples will be taken for one series of tests from each 2-1/2 tons or fraction thereof of each size and kind of reinforcing steel.
 - 4. Design mix from batch plant demonstrating previous use history and associated strengths at 28 days.
 - 5. The Contractor shall submit a mix design stamped and signed by a licensed engineer for approval by the Owner's Representative prior to any placement of concrete.
- C. Submit proof of qualifications as specified in Article 1.2.A of this Section.
- D. Submit reinforcing shop drawings for pool walls, gutters, floors, dike walls and balance tank, etc. as shown on the construction drawing.

1.4 PRODUCT HANDLING

- A. Delivery: Deliver materials to the Project Site in the manufacturer's original unopened containers with all labels intact and legible.
- B. Storage: Store materials under cover in a manner to prevent damage and contamination, and store only the specified materials at the Project Site.
- C. Protection: Use all means necessary to protect the swimming pool concrete before, during, and after installation and to protect the installed Work specified in other Sections.
- D. Replacements: In the event of damage, immediately make all repairs and replacements necessary to the approval of the Owner.

PART 2 PRODUCTS

SWIMMING POOL CONCRETE

131102 - 2

2.1 CONCRETE FORMWORK

A. Form Materials:

1. Form Lumber: All form lumber in contact with exposed concrete shall be new except as allowed for reuse of forms in Part 3 of this Section, and all form lumber shall be one of the following, a combination thereof, or an equal approved in advance by the Owner's Representative.
 - a. "Plyform," Class I or II, bearing the label of the Douglas Fir Plywood Association; "Inner-Seal" Form as manufactured by Louisiana-Pacific, or approved equal.
 - b. Douglas Fir-Larch, number two grade, seasoned, surfaced four sides.
2. Form Release Agent: Colorless, non-staining, free from oils; chemically reactive agent that shall not impair bonding of paint or other coatings intended for use.

B. Ties and Spreaders:

1. Type: All form ties shall be a type which do not leave an open hole through the concrete and which permits neat and solid patching at every hole.
2. Design: When forms are removed, all metal reinforcement shall be not less than two (2) inches from the finished concrete surface.
3. Wire Ties and Wood Spreaders: Do not use wire ties or wood spreaders.

C. Alternate Forming Systems: Alternate forming systems may be used subject to the advance approval of the Owner's Representative.

2.2 CONCRETE REINFORCEMENT

- A. Bars: Bars for reinforcement shall conform to "Specifications for Deformed Billet-Steel Bars for Concrete Reinforcement," ASTM A-615, Grade 60.
- B. Wire Fabric: Wire fabric shall conform to "Specifications for Wire Fabric for Concrete Reinforcement," ASTM A-185.
- C. Tie Wire: Tie wire for reinforcement shall conform to "Specifications for Cold-drawn Steel Wire for Concrete Reinforcement," ASTM A-82 black annealed 16-gauge tie wire.

2.3 CAST-IN-PLACE CONCRETE

A. Concrete:

1. All concrete, unless otherwise specifically permitted by the Owner's Representative, shall be transit-mixed in accordance with ASTM C94. Concrete for water retaining structures that do not receive a waterproofing finish such as ceramic tile or swimming pool plaster shall receive a topical waterproofing finish.
2. The control of concrete production shall be under the supervision of a recognized testing

- agency, selected by the Owner in accordance with Section 01 25 00 of the Specifications.
3. Quality: All concrete shall have the following minimum compressive strengths at twenty-eight (28) days and shall be proportioned within the following limits:
 - a. 4,500 psi minimum compressive strength for cast-in-place swimming pool structures.
 - b. 1" maximum size aggregate.
 - c. 6.0 minimum sacks of cement per cubic yard. *
 - d. Maximum water to cement ratio of 0.45.
 - e. 4" maximum slump.

* For estimate only: to be determined by mix design.
 4. Cement: All cement shall be Portland Cement conforming to ASTM C-150, Type II or V and shall be the product of one manufacturer.
 5. Aggregates:
 - a. Shall conform to "Standard Specifications for Concrete Aggregates," ASTM C33, except as modified herein.
 - b. Coarse Aggregate: Clean sound washed gravel or crushed rock. Crushing may constitute not more than 30% of the total coarse aggregate volume. Not more than 5% flat, thin, elongated or laminated material nor more than 1% deleterious material shall be present. 1" aggregate graded from 1/4" to 1", fineness modulus 6.90 to 7.40. 1-1/2" graded from 1/2" to 1-1/2", fineness modulus 7.80 to 8.20.
 - c. Fine Aggregate: Washed natural sand of hard, strong particles and shall contain not more than 1% of deleterious material, fineness modulus 2.65 to 3.05.
 - d. Aggregate must be certified, non-expansive from a "known" good source.
 6. Water: Clean, fresh, free from acid, alkali, organic matter or other impurities liable to be detrimental to the concrete (potable).
 7. Admixtures: Admixtures shall be used upon approval of the Owner's Representative.
 - a. Air-entraining admixture: Conform to ASTM C260.
 - b. Water-reducing admixture: Conform to ASTM C494.
- B. Construction Joints: Use keyform for slab pour joints. Either preformed galvanized or PVC construction joint forms of a standard manufacturer may be used. Install per manufacturer's recommendations and tool edges of slabs.
- C. Waterstops: PVC bulb-type for use between concrete pours / lifts, conforming with ASTM D 570, D 624, and D 638. Provide in configuration(s) as recommended by manufacturer for specific application. Greenstreak, W.R. Meadows, or approved equal.
- D. Curing Materials:
1. Liquid Membrane (covered slab): Chlorinated rubber membrane forming, curing-sealing compound conforming to ASTM C309.
 2. Liquid Membrane (exposed slab): Clear methyl and butyl methacrylate non-staining, membrane forming, curing-sealing compound conforming to ASTM C309.

E. Cement Grout and Drypack:

1. Cement Grout: Mix 1 part by volume of Portland Cement, 1/2 part by volume of water and fine aggregate enough to make mixture flow under its' own weight.
2. Drypack: Mix 1 part by volume of Portland Cement, 1/2 part by volume of water and fine aggregate enough to make a stiff mix that will mold into a ball. Mix no more than can be used in 30 minutes.

2.4 JOINT SEALANT MATERIALS

- A. Caulking: Multipart, non-sag gun grade polyurethane based sealant meeting the requirements of ASTM C920-02, Type S or M, Mamemco International, Pecora, Sika Corp., Sonneborn Building Products, Tremco or approved equal. Self-leveling caulking materials are not allowed.
- B. Primer: Non-staining type, recommended by sealant manufacturer to suit application.
- C. Joint Cleaner: Non-corrosive and non-staining type, recommended by sealant manufacturer; compatible with joint forming materials.
- D. Sealant Backer Rod: Provide compressible polyethylene or polyurethane backer rod as recommended by the sealant manufacturer.
- E. Bond Breaker Tape: Provide polyethylene tape or other plastic tape as recommended by sealant manufacturer, to be applied to sealant-contact surfaces where bond to substrate or joint filler must be avoided for proper performance of sealant.
- F. Sand: Cover the surface of the caulking with #30 silica sand.

2.5 OTHER MATERIALS

- A. All other materials, not specifically described but required for proper completion of the work of this Section, shall be as selected by the Contractor subject to the advance review by the Owner's Representative.

PART 3 EXECUTION

3.1 SURFACE CONDITIONS

- A. Inspection:
 1. Prior to all Work of this Section, carefully inspect the installed Work of other trades and verify that all such Work is complete to the point where this installation may properly commence.
 2. Verify that all Work may be constructed in accordance with all applicable codes and regulations, the referenced standards, the original design, and in accordance with site

specific Geotechnical Report.

B. Discrepancies:

1. In the event of discrepancy, immediately notify the Owner's Representative.
2. Do not proceed with installation in areas of discrepancy until all such discrepancies have been fully resolved.
3. Failure to notify the Owner's Representative and give written notice of discrepancies shall constitute acceptance by the Contractor of existing conditions as fit and proper to receive work.

3.2 CONCRETE FORMWORK

A. Construction of Forms:

1. General: Construct all required forms to be substantial, sufficiently tight to prevent leakage of concrete paste, and able to withstand excessive deflection when filled with wet concrete.
2. Layout:
 - a. Form for all required cast-in-place concrete to the shapes, sizes, lines and dimensions indicated on the Drawings.
 - b. Exercise particular care in the layout of forms to avoid necessity for cutting concrete after placement.
 - c. Make proper provisions for all openings, offsets, recesses, anchorages, blocking and other features of the Work as shown or required.
 - d. Perform all forming required for Work of other trades and do all cutting and repairing of forms required to permit such installation.
 - e. Carefully examine the Drawings and Specifications and consult with other trades as required relative to providing for pipe and conduit penetrations, reglets, chases and other items in the forms.
3. Imbedded Items: Set all required steel frames, angles, bolts, inserts and other such items required to be anchored in the concrete prior to concrete being placed.
4. Bracings:
 - a. Properly brace and tie the forms together so as to maintain position and shape and to ensure safety to workmen.
 - b. Construct all bracing, supporting members and centering of ample size and strength to safely carry, without excessive deflection, all dead and live loads to which they may be subjected.
 - c. Properly space the forms apart and securely tie them together, using metal spreader ties that give positive tying and accurate spreading.
5. Wetting: Keep forms sufficiently wetted to prevent joints from opening up before concrete is placed.

B. Plywood Forms:

1. Design: Nail the plywood panels directly to studs and apply in a manner to minimize the number of joints.
2. Joints: Make all panel joints tight butt joints with all edges true and square.

C. Footing Forms:

1. Wood Forms: All footing forms shall be wood unless otherwise specifically approved by the Owner's Representative, or as specified in paragraph 3.2(C)(2).
2. Earth Forms:
 - a. Side walls for footings may be of earth provided the soil will stand without caving and the sides of the bank are made with a neat cut to the minimum dimensions indicated on the Drawings.
 - b. For excavation and backfill of earth forms, conform with applicable provisions of Section 131101.

D. Reuse of Forms:

1. Reuse of forms shall be subject to advance approval of the Owner's Representative.
2. Except as specifically approved in advance by the Owner's Representative, reuse of forms shall in no way delay or change the schedule for placement of concrete from the schedule obtainable if all forms were new.
3. Except as specifically approved in advance by the Owner's Representative, reuse of forms shall in no way impart less structural stability to the forms nor less acceptable appearance to finished concrete.

E. Removal of Forms:

1. General:
 - a. In general, side forms of footings may be removed seven (7) days after placement of concrete, but time may be extended if deemed necessary by the Owner's Representative.
 - b. Forms for footings, foundations, grade beams, slabs, walls, and other formed concrete may be removed fourteen (14) days after placement of concrete.
2. Removal:
 - a. Use all means necessary to protect workers, passersby, the installed Work of other trades and the complete safety of the structure.
 - b. Cut nails and tie wires or form ties off flush, and leave all surfaces smooth and clean.
 - c. Remove metal spreader ties on exposed concrete by removing or snapping off inside the wall surface and pointing up and rubbing the resulting pockets to match the surrounding areas.
 - d. Flush all holes resulting from the use of spreader ties and sleeve nuts using water, and then solidly pack throughout the wall thickness with cement grout applied under pressure by means of a grouting gun; grout shall be one part Portland Cement to 2-1/2 parts sand; apply grout immediately after removing forms.

3.3 CONCRETE REINFORCEMENT

A. Bending:

1. General:
 - a. Fabricate all reinforcement in strict accordance with the Drawings.
 - b. Do not use bars with kinks or bends not shown on the Drawings.
 - c. Do not bend or straighten steel in a manner that will injure the material. (When opposite end is already encased in concrete.)
2. Design:
 - a. Bend all bars cold.
 - b. Make bends for stirrups and ties around a pin having a diameter of not less than two (2) times the minimum thickness of the bar.
 - c. Make bends for other bars, including hooks, around a pin having a diameter of not less than six (6) times the minimum thickness of the bar.

B. Placing:

1. General: Before the start of concrete placement, accurately place all concrete reinforcement, positively securing and supporting by concrete blocks, metal chairs or spacers, or by metal hangers.
2. Clearance:
 - a. Preserve clear space between bars of not less than one and one-half (1-1/2) times the nominal diameter of the round bars.
 - b. In no case let the clear space be less than one and one-half (1-1/2) inches nor less than one and one-third (1-1/3) times the maximum size of the aggregate.
 - c. Provide the following minimum concrete covering of reinforcement:
 - 1) Concrete deposited against earth: three (3) inches minimum.
 - 2) Concrete below grade deposited against forms: two (2) inches minimum.
 - 3) Concrete elsewhere: As indicated on Drawings or otherwise approved by the Owner's Representative.
3. Splicing:
 - a. Horizontal Bars:
 - 1) Place bars in horizontal members with minimum lap at splices sufficient to develop the strength of the bars.
 - 2) Bars may be wired together at laps except at points of support of the member, at which points preserve clear space described above.
 - 3) Whenever possible, stagger the splices of adjacent bars.
 - 4) Splice forty (40) bar diameters minimum.
 - 5) Provide non-contact lap slices for shotcrete.
 - b. Wire Fabric: Make all splices in wire fabric at least one and one-half (1-1/2) meshes wide.

- c. Other Splices: Make only those other splices that are indicated on the Drawings or specifically approved by the Owner's Representative.
 - 4. Dowels: Place all required steel dowels and securely anchor them into position before concrete is placed.
 - 5. Obstructions: In the event conduits, piping, inserts, sleeves and other items interfere with placing reinforcement as indicated on the Drawings or otherwise required, immediately consult with the Owner's Representative and obtain approval of a new procedure prior to placing concrete.
- C. Cleaning Reinforcement: Steel reinforcement, at the time concrete is placed around it, shall be free from rust scale, loose mill scale, oil, paint and all other coatings which will destroy or reduce the bond between steel and concrete. Bend down all tie wire away from the top of the pool concrete. Maintain a 2" clear from top of concrete to the tie wire.

3.4 SHOTCRETE REINFORCEMENT

- A. The maximum size of reinforcement shall be No. 5 bars unless it can be demonstrated by preconstruction tests that adequate encasement of larger bars can be achieved. When No. 5 or smaller bars are used, there shall be a minimum clearance between parallel reinforcement bars of 2-1/2 inches (64 mm). When bars larger than No. 5 are permitted, there shall be a minimum clearance between parallel bars equal to six diameters of the bars used. When two curtains of steel are provided, the curtain nearest the nozzle shall have a minimum spacing equal to 12 bar diameters and the remaining curtain shall have a minimum spacing of six bar diameters.
- B. Lap splices in reinforcing bars shall be by the non-contact lap splice method with at least 2 inches clearance between bars. The enforcement agency may permit the use of contact lap splices when necessary for the support of the reinforcing provided it can be demonstrated by means of preconstruction testing, that adequate encasement of the bars at the splice can be achieved, and provided that the splices are placed so that a line through the center of the two spliced bars is perpendicular to the surface of the shotcrete work.

3.5 CAST-IN-PLACE CONCRETE

- A. Conveying and Placing Concrete:
 - 1. Before placing concrete, mixing and conveying equipment shall be well cleaned, and the forms and space to be occupied by concrete shall be thoroughly cleaned and wetted. Ground water shall be removed until the completion of the work.
 - 2. No concrete shall be placed in any unit of work until all formwork has been completely constructed, all reinforcement has been secured in place, all items to be built into concrete are in place, and form ties at construction joints tightened.
 - 3. Concrete shall be conveyed from mixer to place of final deposit in such a way to prevent the separation or loss of ingredients. It shall be placed as nearly as practicable in its' final position to avoid rehandling or flowing. Concrete shall not be dropped freely where reinforcing bars will cause segregation, nor shall it be dropped freely more than six (6) feet. Use tremies, spouts and dump boxes in deep sections. Vibrators are not acceptable for

- facilitating concrete transport.
4. Concrete shall be tamped and spaded to insure proper compaction into all parts of forms and around reinforcement. A mechanical vibrator shall be used to thoroughly compact the concrete. Vibration must be by direct action in the concrete and not against forms or reinforcement.
 5. Mixing and transport time as indicated in ASTM C94 is required. If air temperatures are between 85° and 90° F the delivery time is to be reduced to 75 minutes. When air temperatures are in excess of 90° F the delivery time should be reduced to 60 minutes.
 6. Truck mixes without batch certificates will be rejected.
- B. Construction Joints / Expansion Joints: Construction joints and expansion joints shall be provided at locations and in the manner shown on the Drawings. With exception of existing concrete / new shotcrete joints, use PVC bulb-type waterstops appropriate for design condition between all concrete pours / lifts to avoid cold joints. Waterstops shall be placed in such a way to protect reinforcing steel from rust and oxidation. All expansion joints must be the full depth of the concrete section in which they are located.
- C. Slab Finishes: Concrete slabs shall be compacted and screeded uniformly to grades shown. Push large aggregates below the surface with a screen tamper, screed and bull float. As soon as the surface becomes workable, it shall be wood floated, then finished as indicated on the Drawings to a uniform smooth, true surface in a neat and workmanlike manner. Carefully coordinate slab finish requirements with other trades (ceramic tile, pool plaster) to insure concrete finish is appropriate substrate for final finish material.
1. Pool Floor Slab: Heavy Wire Broom Finish.
- D. Protection and Curing:
1. Concrete shall be protected from injurious action of the elements and defacement of any nature during construction.
 2. All forms must be kept wet to prevent drying out of the concrete.
 3. All concrete surfaces including footings must be kept wet for at least seven (7) days after concrete is placed.
 4. Apply the appropriate curing materials, as specified in 2.3 of this Section, immediately after finishing slabs. Application shall be as specified by the manufacturer.
- E. Form Removal:
1. Take care in removing forms so that surfaces are not marred or gouged and that corners are true, sharp and unbroken.
 2. No steel spreaders, ties or other metal shall project from or be visible on any concrete surfaces.
- F. Defective Work:
1. Should the strength of any concrete for any portion of the work indicated by tests of molded cylinders and core tests fall below minimum 28 days strength specified or indicated, concrete will be deemed defective work and shall be replaced.
 2. Concrete work that is not formed as indicated, is not true to intended alignment, not plumb

or level where so intended, not true to intended grades or elevations, not true to specified or selected finish, contains sawdust shavings, wood, or embedded debris, which exhibits cracks or contains fine or coarse sulfide particles, or expansive aggregates detrimental to performance or appearance of the concrete shall be deemed defective.

3. Promptly perform work required to replace and properly clean (by sandblasting if necessary) any defective concrete panels (control joint or expansion joint to control joint or expansion joint), at Contractor's expense, including all expense of additional inspection, tests, or supervision made necessary as a result of defective concrete.

3.6 EXPANSION JOINTS

- A. Temperatures: Do not install sealants when air temperature is less than 40°F.
- B. Tooling: Tool exposed joints to a slightly concave surface using slicking materials recommended by the manufacturer. The tooling procedure shall press sealant against the sides of the joint. No materials shall be left “feathered” out or smeared on the abutting materials. Completed joints shall have a uniform professional appearance.
- C. Joint Construction: Sealant joint width, thickness and cross-sectional profile to be constructed in strict accordance with the sealant manufacturer’s recommendations.
- D. Sand: At the appropriate time cover the sealant with sand to provide a sanded finish.

3.7 CLEAN-UP

- A. Upon completion of the Work of this Section, immediately remove all swimming pool concrete materials, debris and rubbish occasioned by this Work to the approval of the Owner’s Representative.

END OF SECTION

SECTION 131103 - SWIMMING POOL SHOTCRETE

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and 2018 Greenbook and City of San Diego “Whitebook”, apply to this section.

1.2 WORK INCLUDED

- A. Provide labor, materials and equipment as required to install wet mix shotcrete for swimming pool structures as indicated on the Drawings and herein specified.

1.3 QUALITY ASSURANCE

- A. Qualifications of Workers:
 - 1. The entity performing the work of this Section shall have been successfully engaged in the respective trade prior to commencement of the Work.
 - 2. For actual construction operations, use only trained and experienced workers with experience with the materials and methods specified.
 - 3. Provide at least one person who shall be present at all times during execution of the work of this Section, with experience with the type of materials being installed, the referenced standards, and who shall direct all Work performed under this Section.
- B. Standards: Except as otherwise indicated, provide shotcrete per American Concrete Institute Standard ACI 506. In addition, conform to recommendations contained in “Shotcrete,” Brochure G-84 as published by the Guniting Contractors Association, Sylmar, California and the California Building Code (latest edition). Comply with CBC 2016 Section 1908A.
- C. Mix Design: The Contractor shall submit a mix design stamped and signed by a licensed engineer for approval by the Owner’s Representative prior to any placement of shotcrete. Mix design shall indicate source of aggregate and brands of cement and admixtures used. All mix designs shall take character of locally available aggregate into consideration and make adjustments as necessary to conform with specified design criteria.
- D. Testing and Inspection: One test panel shall be provided for each 50 yards (or portion thereof) of shotcrete placed. The size of the strength test panel shall be per the direction of the Special Shotcrete Inspector. At least three (3) cores shall be taken from each test panel. (At least three (3) cores shall be taken from the completed work for each day of shotcrete operation.) Testing shall be performed by the Owner’s designated Testing Lab and comply with Section 1908A, California Building Code. Continuous inspection of the shotcrete operation by a deputy inspector provided by the Owner shall be required. Inspection of shotcrete work shall comply

with Section 1908A of California Building Code, and coring, sampling, soaking and testing per 1908A.5 and 1908A.10 of California Building Code. Contractor shall provide test panels for all required tests.

- E. Tolerances: Construct all swimming pool shotcrete straight, true, plumb and square within a tolerance horizontally of one in 200 and a tolerance vertically of one in 2000.

1.4 SUBMITTALS AND SUBSTITUTIONS

- A. Provide submittals in conformance with the requirements of Section 013300.
- B. Materials List: Within thirty (30) days after issuance of Notice to Proceed, and before shotcrete materials are delivered to the project site, submit to the Owner's Representative a complete list of materials proposed to be used in this portion of the Work, showing manufacturer's name and catalog number of all items such as admixtures and curing membranes, and the name and address of the supplier of cement and aggregate to be used.
- C. Submit proof of qualifications as specified in Article 1.2.A of this Section.

1.5 PRODUCT HANDLING

- A. Protection: Use all means necessary to protect shotcrete materials before, during and after installation and to protect the installed Work specified in other Sections.
- B. Replacements: In the event of damage, immediately make all repairs and replacements necessary to the approval of the Owner's Representative and at no additional cost to the Owner.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Cement: Cement shall be Type II or V Portland Cement conforming to ASTM C150. Cement type shall be the same for all shotcrete work.
- B. Aggregate: ASTM C33, washed hard dense durable clean sharp sand from approved pit, free of organic matter and opaline, feldspar, or siliceous magnesium substances and containing not more than 3% by weight of deleterious substances. When tested for organic impurities by ASTM C40 method, fine aggregate color not darker than reference standard color. When tested for soundness by ASTM C88 method, loss after 5 cycles not over 10% of fine aggregate.
- C. Water: Potable, clean, fresh, free from acid, alkali, organic matter or other impurities liable to be detrimental to the shotcrete.
- D. Admixtures: Admixtures shall only be used upon approval of the Owner's Representative.

PART 3 - EXECUTION

3.1 EXECUTION

A. Inspection:

1. Prior to all Work of this Section carefully inspect the installed Work of other trades and verify that all such Work is complete to the point where this installation may properly commence.
2. Verify that items to be imbedded in shotcrete are in place and that shotcrete may be placed to the lines and elevations shown on the Drawings, with all required clearance from reinforcement.

B. Discrepancies:

1. In the event of discrepancy, immediately notify the Owner's Representative.
2. Do not proceed with installation in areas of discrepancy until all such discrepancies have been fully resolved.
3. Failure to notify the Owner's Representative and give written notice of discrepancies shall constitute acceptance by the Contractor of existing conditions as fit and proper to receive the Work.

3.2 PREPARATION

A. General:

1. Thoroughly clean all areas where shotcrete is to be placed to insure proper bonding of shotcrete.
2. Where shotcrete is to be placed against smooth surfaces (i.e., cast-in-place concrete), sandblast surfaces to receive shotcrete to provide clean aggregate surface, thereby insuring proper bond between materials.

- B. Ground Wires: Adequate ground wires, to be used as screeds, shall be installed to establish the thickness and surface planes of the shotcrete work. Ground wires shall be placed so that they are tight and true to line and grade and in such a manner that they can be easily tightened.

3.3 PROPORTIONING AND MIXING

- A. Accurately control proportion of water to Portland cement to produce thorough and uniform hydration of the shotcrete that, when shot, forms a homogeneous mass containing neither sags nor dry sand formation.
- B. Strength: Minimum 4,500 psi 28-day compressive strength with a maximum water/cement ratio of 0.45 unless otherwise indicated.
- C. Discontinue shotcrete work if the time between the addition of mixing water to cement and aggregate, or cement to aggregates, and placement of shotcrete exceeds ninety (90) minutes

when the ambient temperature is below 85 degrees Fahrenheit, or exceeds sixty (60) minutes when the ambient temperature is above 85 degrees Fahrenheit.

3.4 SHOTCRETE PLACING, FINISHING, AND CURING

- A. Operations: Utilize a standard type of air compressor, capable of providing a minimum of 250 cubic feet of air per minute per nozzle.
- B. Placing: Except when shooting reinforcing, hold the nozzle perpendicular to and 2-1/2 to 3 feet from surface. At reinforcing bars, hold the nozzle so as to direct shotcrete behind the bars, and shoot each side of each bars separately. A nozzleman's helper equipped with an air jet shall precede the nozzle and blow out rebound or sand lodged behind bars, on forms, or placed shotcrete. Placing shotcrete horizontal members from the top is not allowed unless approved methods are employed to eliminate all rebound. Material shall emerge from the nozzle in a uniform flow. If flow becomes intermittent for any reason, direct the nozzle away from the surface until the flow is again steady and constant. Do not reuse rebound or loose sand for any purpose.
- C. Puddled Shotcrete: Use of "puddled shotcrete" in which the air pressure is reduced and the water content is increased to facilitate placing in difficult locations is not allowed. Do not place shotcrete where nozzle stream cannot impinge directly on the involved surface. Where difficult shooting conditions occur, obtain proper results by maintaining correct air pressure and water ratio and reduce supply of material.
- D. Construction Joints: Form joints with sloping beveled edges. Clean and dampen the hardened joint surfaces before placing additional shotcrete. Square edged construction joints are not allowed. The film of laitance which forms on the surface of the shotcrete shall be removed within approximately two hours after application by brushing with a stiff broom. If this film is not removed within two hours, it shall be removed by thorough wire brushing or sand blasting. Construction joints over eight hours old shall be thoroughly cleaned with air and water prior to receiving shotcrete.
- E. Finishing: Rod exposed surfaces to true planes and lines on reaching the thickness and plane established by forms and ground wires. Tamp and wood float surfaces level and provide a rough raked finish. Carefully coordinate finish requirements with other trades (ceramic tile, pool plaster) to insure shotcrete finish is appropriate substrate for final finish material.
- F. Curing: Keep shotcrete continuously damp for not less than seven (7) days after placing. Use sealed curing sheeting or other approved curing method where water curing is not feasible. Do not use curing compound of any kind.

3.5 DEFECTIVE WORK

- A. Cut out, remove and replace, or repair to the satisfaction of the Owner's Representative, shotcrete not meeting minimum strength, not true, plumb or level, not to required elevations, containing cracks detrimental to performance or appearance, containing shavings, debris or with honeycombs or voids.

- B. Promptly perform Work required to repair, patch, replace, render properly cleaned surfaces (by sandblasting if necessary) or otherwise make good any defective shotcrete at Contractor's expense, including all expense of additional inspection, tests, or supervision made necessary as a result of defective shotcrete.

3.6 CLEAN-UP

- A. Upon completion of the Work of this Section, immediately remove all swimming pool shotcrete materials, debris and rubbish occasioned by this work to the approval of the Owner's Representative.

END OF SECTION

SECTION 131104 – SWIMMING POOL CERAMIC TILE

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and 2018 Greenbook and City of San Diego “Whitebook”, apply to this section.

1.2 WORK INCLUDED

- A. Swimming pool ceramic tile detailed on the Drawings, including, but not limited to, the following:
 - 1. Bond Beam / Waterline Tile.
 - 2. Gutter Bullnose Tile
 - 3. Lane Line / Target Tile / 4’-6”
 - 4. Depth / Caution Marker Tile (On bond beam and at waterline)
 - 5. Trim Tile (On underwater steps)
 - 6. Children’s Pool Waterline Tile

1.3 QUALITY ASSURANCE

- A. Qualifications of Workers:
 - 1. The entity performing the work of this Section shall have been successfully engaged in the respective trade prior to commencement of the Work.
 - 2. For actual construction operations, use only trained and experienced workers with experience with the materials and methods specified.
 - 3. Provide at least one person who shall be present at all times during execution of the work of this Section, with experience with the type of materials being installed, the referenced standards, and who shall direct all Work performed under this Section.
- B. Standards: In addition to complying with all pertinent codes and regulations:
 - 1. Manufacture of all tile shall be in accordance with ANSI A-137.1.
 - 2. Install ceramic tile in accordance with the recommendations contained in the 2019 “Handbook for Ceramic Tile Installation” of the Tile Council of America, Inc.
- C. Tolerances: Install all swimming pool ceramic tile straight, true, plumb and square within a tolerance horizontally of one in 200 and a tolerance vertically of one in 500. Waterline and gutter bullnose tile shall be level to 1/8” (+/- 1/16”) around entire perimeter of swimming pools.

1.4 SUBMITTALS AND SUBSTITUTIONS

- A. Provide submittals in conformance with the requirements of Section 013300.
- B. Samples: Submit samples of each color and pattern in the specified groups. Character samples can be representative for review prior to screening of actual tile.
- C. Master Grade Certificate: Prior to opening ceramic tile containers, submit a Master Grade Certificate, signed by the manufacturer of the tile used and issued when the shipment is made, stating the grade, kind of tile, identification marks for the tile containers, and the name and location of the Project.
- D. Specifications: Submit manufacturer's recommended installation specifications for the Work.
- E. Submit proof of qualifications as specified in Article 1.2.A of this Section.

1.5 PRODUCT HANDLING

- A. Delivery: Deliver all materials to the Project Site in the manufacturer's original unopened containers with all labels intact and legible.
- B. Storage: Store all materials under cover in a manner to prevent damage and contamination, and store only the specified materials at the Project site.
- C. Protection: Use all means necessary to protect swimming pool ceramic tile before, during and after installation and to protect the installed Work specified in other Sections.
- D. Replacements: In the event of damage, immediately make all repairs and replacements necessary to the approval of the Owner's Representative.

PART 2 - PRODUCTS

2.1 TILE

- A. Bond Beam / Waterline Tile:
 - 1. Material: Group 4 quality, frost proof unglazed ceramic mosaic tile with absorption rate of less than 1% as manufactured by Dal-Tile or approved equal. Contact Kylee Midura kylee.midura@daltile.com (858) 344-0019.
 - 2. Size: 1 x 1 inches.
 - 3. Color: Dal-Tile #D-621 'Nautical Blue'.
- B. Gutter Bullnose Tile:
 - 1. Material: Group 4 quality, frost proof unglazed ceramic mosaic tile with absorption rate of less than 1% as manufactured by Dal-Tile or approved equal.

2. Size: 1 x 2 inches (#C-701).
3. Color: Dal-Tile #D-621 'Nautical Blue'.

C. Lane Line / Target Tile / 4'-6" Depth Tile:

1. Material: Group 3 quality, frost proof unglazed ceramic mosaic tile with absorption rate of less than 1% as manufactured by Dal-Tile or approved equal.
2. Size: 1 x 1 inches.
3. Color: Dal-Tile #D-311, 'Black' at lane lines and end wall targets and Dal-Tile, #D-023 'Galaxy Blue' at 4'-6" depth.

D. Depth / Caution Marker Tile (On bond beam and at waterline):

1. Material: All depth/caution marker tile shall be unglazed, ceramic mosaic tile with absorption rate of less than 1% as manufactured by Dal-Tile or approved equal.
2. Size: 1 x 1 inches.
3. Color: Integral color throughout the body of the tile #D-014, 'Desert Gray' letters and numbers on blue field of Dal-Tile #D-621 'Nautical Blue'.

E. Trim Tile (On underwater steps):

1. Material: Group 3 quality, frost proof unglazed ceramic mosaic tile with absorption rate of less than 1% as manufactured by Dal-Tile or approved equal.
2. Size: 1 x 1 inches, with S-812 quarter round. Color: Dal-Tile #D-311, 'Black'.
3. Size: 2 x 6 with integral quarter round. Color: Black, non-slip. Inlays #CPC00022.

F. Children's Pool Waterline Tile:

1. Material: Group 3 quality, frost proof unglazed ceramic mosaic tile with absorption rate of less than 1% as manufactured by Dal-Tile or approved equal.
2. Size: 1 x 1 inches, non-slip.
3. Color: Dal-Tile #D-317, 'Biscuit White'

2.2 MORTAR

- A. Sand for Mortar: Comply with requirements of fine aggregate for concrete.
- B. Cement: Type I Portland Cement, conforming to ASTM C150.
- C. Hydrated Lime: Conforming to ASTM C206 or 207, Type S.
- D. Water: From a potable source.
- E. Mortar shall meet ASTM C270 standards.

2.3 THIN SET MORTAR

- A. Laticrete 254 Platinum, Laticrete, Custom or equal.
- B. Water: From a potable source.
- C. Mortar shall meet ASTM C627 standard.

2.4 GROUT

- A. All tile grout shall be waterproof grout complying with the recommendations of TCA and ANSI A118.6 (4) standards. Grout color shall be grey for dark backgrounds, white for light backgrounds (verify colors with Architect).

2.5 OTHER MATERIALS

- A. All other materials, not specifically described but required for a complete and proper installation of ceramic tile as indicated on the Drawings, shall be new, first quality of their respective kinds, and subject to the approval of the Owner's Representative.

PART 3 - EXECUTION

3.1 SURFACE CONDITIONS

- A. Inspection:
 - 1. Prior to all Work of this Section, carefully inspect the installed Work of other trades and verify that all such Work is complete to the point where this installation may properly commence.
 - 2. Verify that ceramic tile can be installed in accordance with the original design and all referenced standards.
- B. Discrepancies:
 - 1. In the event of discrepancy, immediately notify the Owner's Representative.
 - 2. Do not proceed with installation in areas of discrepancy until all such discrepancies have been fully resolved.
 - 3. Failure to notify the Owner's Representative and give written notice of discrepancies shall constitute acceptance by the Contractor of existing conditions as fit and proper to receive its Work.

3.2 INSTALLATION

- A. Method:

1. Install all ceramic tile in strict accordance with installation method P601-90 of the 2019 Handbook for Ceramic Tile Installation of the Tile Council of America, Inc.
2. Be certain to install all ceramic tile perfectly level, flush, plumb, and to the finish grades and elevations indicated on the Drawings.

B. Interface:

1. Carefully establish and follow the required horizontal and vertical elevations to insure proper and adequate space for the work and materials of other trades.
2. Coordinate and cooperate as required with other trades to insure proper and adequate interface of ceramic tile Work with the Work of other trades.

3.3 GROUTING

- A. Follow grout manufacturer's recommendations as to grouting procedures and precautions.
- B. Remove all grout haze, observing grout manufacturer's recommendations as to use of acid and chemical cleaners.

3.4 EXTRA STOCK

- A. Provide one (1) unopened box of extra tile for 2.1A, 2.1B and 2.1C for Owners use at a future time.

3.5 CLEAN-UP

- A. Upon completion of the swimming pool ceramic tile installation, thoroughly clean and polish the exposed surfaces of tile work. Completely clean work area of debris and rubbish occasioned by this Work and dispose of to the approval of the Owner's Representative.

END OF SECTION

SECTION 131105 – SWIMMING POOL PLASTER

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and 2018 Greenbook and City of San Diego “Whitebook”, apply to this section.

1.2 WORK INCLUDED

- A. Swimming pool plaster and waterproofing of swimming pool structures as indicated on the Drawings and herein specified.
- B. Start-up and operation instructions to Owner’s operations and maintenance personnel and properly balance swimming pool water chemistry until the Owner takes occupancy.

1.3 QUALITY ASSURANCE

- A. Qualifications of Workers:
 - 1. The entity performing the work of this Section shall have been successfully engaged in the respective trade prior to commencement of the Work.
 - 2. For actual construction operations, use only trained and experienced workers with experience with the materials and methods specified.
 - 3. Provide at least one person who shall be present at all times during execution of the work of this Section, with experience with the type of materials being installed, the referenced standards, and who shall direct all Work performed under this Section.
- B. Standards: Swimming pool plaster shall conform with requirements of Chapter 31B of California Building Code, latest edition. In addition, meet requirements of applicable portions of most current edition of the “Technical Manual,” National Plasterers Council, Mission Viejo, California.
- C. Start-up:
 - 1. Furnish a swimming pool water chemistry consultant, with experience prior to commencing the work, possessing either AFO (Aquatic Facility Operator) or CPO (Certified Pool Operator) certification(s), to supervise and properly balance swimming pool water chemistry.
 - 2. Demonstrate to the Owner that all systems are fully operational and that calcium hardness, total alkalinity, chlorine residual and pH levels are within specified limits.
 - 3. Standards: Furnish labor and chemicals as required to condition the water properly to the following specifications:

- a. Calcium Hardness: 200-400 parts per million (PPM)
- b. Total Alkalinity: 80-100 PPM, minimum
- c. Chlorine Residual: 1.00 to 2.00 PPM
- d. pH Factor: 7.2 to 7.6

1.4 SUBMITTALS AND SUBSTITUTIONS

- A. Provide submittals in conformance with the requirements of Section 013300.
- B. Submit proof of qualifications as specified in Article 1.2 and 1.2.C.1 of this Section.

1.5 PRODUCT HANDLING

- A. Delivery: Deliver materials to the Project Site in the manufacturer's original unopened containers with all labels intact and legible.
- B. Storage: Store materials under cover in a manner to prevent damage and contamination, and store only the specified materials at the Project Site.
- C. Protection: Use all means necessary to protect the swimming pool plaster before, during, and after installation and to protect the installed Work specified in other Sections.
- D. Replacements: In the event of damage, immediately make all repairs and replacements necessary to the approval of the Owner.

1.6 ENVIRONMENTAL CONDITIONS

- A. No plastering shall be done under unsuitable conditions of weather or temperature. No plastering shall be done when prevailing temperature is 40 degrees Fahrenheit or less.
- B. Do not install plaster during rain and, if rain commences after plastering has begun, immediately protect the plaster from rain by all means necessary until the plaster has set.
- C. Do not install plaster during wind greater than 10 mph and, if wind commences after plastering has begun, immediately protect the plaster from wind by all means necessary until the plaster has set.

PART 2 - PRODUCTS

2.1 CEMENT / AGGREGATE

- A. Luna Quartz® tiny pebble finish by Wet Edge Technologies. Altima® quartz finish by Wet Edge Technologies. Pebble-Fina® pool finish by Pebble Technologies

2.2 COLOR

- A. All swimming pool plaster shall be white in color. Wet Edge Technologies shall be Luna Quartz® “Polar White”. Wet Edge Technologies shall be Altima® “White”. Pebble Technology shall be Pebble-Fina® “Classico”. Contractor to obtain written approval on selected pebble color from the local Health Department prior to installation. Submit cut sheet, color sample and written approval for review by Architect and Owner.

2.3 WATER

- A. Water for swimming pool plaster shall be clean and free from injurious amounts of acid, alkali, and organics.

2.4 GUTTER, PUMP PIT, BACKWASH PIT & SURGE CHAMBER WATERPROOFING

- A. Xypex, Miracote Miraflex Membrane C, or approved equal. Mix and apply per manufacturer's recommendations for specific application. Color shall be Gray.

PART 3 - EXECUTION

3.1 SURFACE CONDITIONS

- A. Inspection:
 - 1. Prior to Work of this Section, carefully inspect the installed Work of other trades and verify that all such Work is complete to the point where this installation can properly commence.
 - 2. Verify that swimming pool plaster can be installed in accordance with the original design and all referenced standards, including proprietary application techniques and application training/certifications.
- B. Discrepancies:
 - 1. In the event of discrepancy, immediately notify the Owner's Representative.
 - 2. Do not proceed with installation in areas of discrepancy until all such discrepancies have been fully resolved.
 - 3. Failure to notify the Owner's Representative and give written notice of discrepancies shall constitute acceptance by the Contractor of existing conditions as fit and proper to receive the Work.

3.2 INSTALLATION OF GUTTER, PUMP PIT, BACKWASH PIT & SURGE CHAMBER WATERPROOFING

- A. Provide two (2) coats of the specified gutter and surge chamber waterproofing prior to plastering the swimming pool. Prepare surfaces to receive waterproofing and cure in

conformance with manufacturer's recommendations. Provide steel trowel application method to ensure uniform smooth, dense surface finish.

3.3 INSTALLATION OF POOL PLASTER

A. Outdoor Pools or Spas:

1. Completion of other work: DO NOT commence plastering of swimming pool(s) or spa(s) until the following conditions have been met:
 - a. The Health Department and/or other governing agencies have approved the pool(s) and/or spas) for plaster.
 - b. All concrete pool deck construction is complete and the pool decks have been thoroughly cleaned.
 - c. All landscaping in areas adjacent to the pool(s) or spa(s) is complete and the landscape irrigation system is operable.
 - d. All painting in the pool area is complete.
 - e. All welding and grinding in locations adjacent to the pool area are complete.
 - f. The backwash sewer connection is complete.
 - g. Pool(s) and/or spa(s) area(s) perimeter fencing installation is complete.
 - h. All trash and debris have been removed from areas adjacent to the pool(s) or spa(s), particularly those areas that are normally upwind from the pool(s) or spa(s).
 - i. All dust raising construction and/or activities in areas adjacent to the pool(s) or spa(s) are complete or mitigated.
 - j. The circulation pump(s) is/are operational.
 - k. The mechanical system has been flushed sufficiently to remove all dirt and debris from the piping system.
 - l. All necessary chemicals (Chlorine, pH adjuster, Sodium Bicarbonate and Calcium Chloride or any other required chemicals) are on site and ready for use.
 - m. Obtain written approval from the Owner and the Architect.

B. Indoor Pools or Spas:

1. Completion of Other Work: DO NOT commence plastering of swimming pool(s) or spa(s) until the following conditions have been met:
 - a. The Health Department has approved the pool(s) and/or spa(s) for plaster.
 - b. All work above the pool(s) and/or spa(s) is complete.
 - c. All painting in the pool area is complete.
 - d. All welding and grinding in locations adjacent to the pool area are complete.
 - e. The backwash sewer connection is complete.
 - f. All concrete pool deck construction is complete and the pool decks have been thoroughly cleaned.
 - g. The circulation pump(s) is/are operation.
 - h. The mechanical system has been flushed sufficiently to remove all dirt and debris from the piping system.
 - i. All necessary chemicals (Chlorine, Acid, Sodium Bicarbonate and Calcium Chloride) are on site and ready to use.
 - j. Obtain written approval from the Owner and the Architect.

- C. Contractor accepts all liability from damage done to the pool plaster if the pool(s) or spa(s) is (are) plaster before the completion of the above listed items or without the written approval of the Owner and the Architect.

D. POOL PLASTER AUTHORIZATION FORM:

1. The pool(s) and or spa(s) at City Heights Pool is/are hereby approved for the installation of the pool plaster. Pursuant to the requirements of specification section 131105, paragraph 3.3.

Owner

Date

Architect / Project Manager

Date

E. Preparation:

1. Do not apply plaster over dirt, rust, scale, grease, moisture, scuffed surfaces or conditions otherwise detrimental to the formation of a durable plaster finish.
2. Consult with manufacturer on application to specific surfaces being treated. Follow manufacturer's recommendation for curing of cast-in-place concrete or shotcrete surfaces prior to application of plaster.
3. Protect ceramic tile, decking, deck equipment, gratings, fittings and other items by suitable covering or masking.
4. Mask or remove all hardware, hardware accessories, machined surfaces, plates, lighting fixtures and similar items in place not to receive pool plaster. Following completion of plaster for each space or area remove masking. Re-install all removed items utilizing workers skilled in the trades involved.

F. Application:

1. Finish shall be applied to a uniform thickness of 3/8" to 1/2" over the entire surface. The walls shall be scratch-coated followed by a finish coat. Material applied to the floor after the walls have been applied shall be accelerated to assure uniform setting time throughout the pool surface.
2. Float the plaster to a uniform plane and trowel to a smooth, dense, impervious surface using extreme care to avoid stains.
3. Take special care in finishing around pool fittings, making sure to mask off or plug openings so as not to fill such openings with excess plaster. Be certain to completely enclose pool fittings with plaster to insure a leak-proof seal around pipes, fittings, lights, anchors, etc.
4. Accurately interface with the finish planes of items installed by other trades.
5. Quartz and pebble plaster finish is to be applied by a licensed applicator as approved by the manufacturer, and in accordance with manufacturer's training.

3.4 CURING

- A. Preparation: Anticipate the need for required equipment and have all such equipment immediately available for use upon completion of pool plastering.
- B. Pool Filling:
 - 1. After the plaster has sufficiently dried and before drying has proceeded to a damaging point, cure the plaster by gradually filling the pool with water, preventing all damage to finished plaster surfaces.
 - 2. Flow the water continuously until the pool is filled.
 - 3. When the weather is hot and/or water pressure is low, keep the pool walls damp while the pool is filling.
 - 4. Coordinate with Contractor to ensure that the pool is continuously monitored while filling to prevent overflow.

3.5 EQUIPMENT ACTIVATION

- A. All water chemistry and filtration mechanical equipment shall be operational upon filling of pool after plaster. Chemicals and other related support items as supplied by Contractor, shall be in supply at start-up.
- B. For the first fourteen (14) calendar days after completion of the pool plaster, brush all plastered surfaces at least twice a day and coordinate with General Contractor to ensure that the plaster is carefully maintained after the initial fourteen-day period. In addition, coordinate with the Contractor to ensure that pool filtration equipment is continuously running during the initial fourteen-day period.
- C. Start-up and provide qualified personnel to operate pool equipment for a period not less than fourteen (14) days after the pool is placed in operation, or until the Owner takes occupancy of the facility or letter of substantial completion. During this time, Contractor shall instruct and supervise the Owner's personnel in the various operating and maintenance techniques involved. Contractor shall be responsible for supply of chemicals during this not less than fourteen (14) day period and at time of turnover to Owner, chemical storage tanks shall be full. (Owner's personnel shall be fully trained and capable of assuming swimming pool maintenance tasks, training may begin before Owner takes occupancy).

3.6 CLEAN-UP

- A. Upon completion of swimming pool plaster, remove all materials, equipment and debris occasioned by this Work and leave the job site in a clean and presentable condition. Perform all such clean-up to the approval of the Owner's Representative.

3.7 WARRANTY

- A. All applicators must provide a minimum of five (5) year warranty for application and workmanship additional to the manufacturer's warranty for product.

END OF SECTION

SECTION 131106 – SWIMMING POOL EQUIPMENT

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and 2018 Greenbook and City of San Diego “Whitebook”, apply to this section.

1.2 WORK INCLUDED

- A. Swimming pool equipment items required for this Work as indicated on the Drawings and specified herein.

1.3 QUALITY ASSURANCE

- A. Qualifications of Workers:
 - 1. The entity performing the work of this Section shall have been successfully engaged in the respective trade prior to commencement of the Work.
 - 2. For actual construction operations, use only trained and experienced workers with experience with the materials and methods specified.
 - 3. Provide at least one person who shall be present at all times during execution of the work of this Section, with experience with the type of materials being installed, the referenced standards, and who shall direct all Work performed under this Section.
- B. All equipment supplied or work performed shall comply with regulations governing public swimming pools and spas as contained within Chapter 31 of California Building Code, latest edition.

1.4 SUBMITTALS AND SUBSTITUTIONS

- A. Provide submittals in conformance with the requirements of Section 013300.
- B. Required submittals include:
 - 1. Swimming Pool Safety Equipment and Maintenance Equipment as specified in Article 2.1 and 2.2 of this Section.
 - 2. Swimming Pool Fittings, Deck and Mechanical Equipment as specified in Article 2.3-2.16 of this Section.
- C. Submit proof of qualifications as specified in Article 1.2.A of this Section.

- D. The equipment shown on the plans represent the first listed items in the technical specifications. The Contractor shall be responsible for all required field coordination and installation of any approved equal product to provide a fully working and warranted system. The Contractor shall submit detailed shop drawings for any products used other than the first listed specified items. Contractor provided shop drawings shall include details and quality equal to the original plans and construction documents. The Contractor shall provide any and all required engineering including but not limited to structural and anchorage requirements for any proposed equipment other than the first listed specified equipment. The Contractor is responsible to provide a factory certified representative(s) to start-up and provide on-site training for all swimming pool mechanical equipment provided.

1.5 PRODUCT HANDLING

- A. Protection: Use all means necessary to protect swimming pool equipment items before, during and after installation and to protect the installed work specified in other Sections.
- B. Replacements: In the event of damage, immediately make all repairs and replacements necessary to the approval of the Owner's Representative.

PART 2 - PRODUCTS

2.1 SAFETY EQUIPMENT

- A. First Aid Kit for 50 Persons with two (2) wool blankets: Marine Rescue or approved equal. Quantity as required by the Department of Health, one (1) minimum.
- B. Rescue Tubes (minimum 49" long) and Life Ring Buoy (minimum 24" in diameter) U.S. Coast Guard Approved: Marine Rescue or approved equal. Quantity as required by the Department of Health, one (1) minimum.
- C. Throw Rope (3/16" diameter) complete with lemon foot, for use with Life Ring Buoy: Kiefer, United Industries, or approved equal. Quantity as required by the Department of Health, one (1) minimum.
- D. Rescue Hooks, 16' long x 1-1/2" aluminum pole and stainless-steel mounting hardware: Kiefer, Pentair, or approved equal. Quantity as required by the Department of Health, one (1) minimum.
- E. Pool Safety Signs: As required by the Department of Health. Submittal required. Placement at the pool site shall be in conformance with Health Department Inspector. One (1) set minimum.

2.2 MAINTENANCE EQUIPMENT

- A. Commercial Pool Vacuum: Provide pool vacuum cart with lid-mounted handle, separate lid-mounted bracket for electrical cord, and two rubber-tired ball bearing wheels with grease fittings. Cart and filter shall be fabricated from schedule 304 stainless steel with welds treated

and passified. Provide an all-bronze pump with a 1 1/2 hp, 115/230 volt, maximum 20 amp draw @ 120 volts, single phase motor and a 6" bronze trap. Pump shall be UL and NSF listed, have 2" suction and 1 1/2" discharge fittings, and have a brass priming valve with hose bib. Entire pump assembly shall be anchored to vacuum cart with two stainless steel bolts. Provide a 100 foot 10 AWG 3/C SJ electrical cord with ground fault interrupter (GFI) plus. Cord shall be wired to a double pole, 30-amp switch which shall be mounted on pump motor. One (1) required.

- B. Heavy Duty Vacuum Hose: 2" x 50', with hose connector. Pentair, Smooth Bore or approved equal. Two (2) required.
- C. Utility Pole: 24' fiberglass with connectors. Pentair, Skimlite or approved equal. Two (2) required.
- D. Commercial Vacuum Head: 24" wide "flexible" vacuum head. Pentair Model #R201186, or approved equal. One (1) required.
- E. Pool Wall Brush: 36" wide professional quality. Pentair or approved equal. One (1) required.
- F. Leaf Skimmer: 30" x 8" x 12", professional quality. Pentair, Spectrum or approved equal. One required.
- G. Water Quality Test Kit, Professional Grade, Taylor Technologies Model #1741C, LaMotte Model #PRO250-NJ, or approved equal. One (1) required.

2.3 FITTINGS

- A. Main Drain Frame & Grate (18" x 36"): Lawson Aquatics #MLD-FG-1836, Super Sump with VGB Compliant Grates, or approved equal, six (6) required. Provide two (2) Hayward #SP-1056 1-1/2" collector tubes and two (2) #SP-1055 Hayward 1-1/2" hydrostatic relief valve, one per main drain sump. Contractor shall provide to the Owner a Certificate of Compliance, signed by a licensed design professional, for main drain sump(s) and frame(s) and grate(s), as required by the Virginia Graeme Baker Act.
- B. Floor Return Inlet 1-1/2" Adjustable: StaRite #08417-0000, United Industries, or approved equal. Forty-four (44) required.
- C. Swimming Pool Underwater Lights: 'PureWhite LED' #LPL-F5W-120-100 (100' cord) with polished stainless-steel face rings, 87-watt lamps and LWC (J & J Electronics); provide stainless steel light niches, #78210600 with 1" rear hubs, 'Pentair' or approved equal. Nineteen (19) required.
- D. Utilize Existing Junction Box for Underwater Lights, complete with strain reliefs: Hydrel #1719, Appleton, or approved equal. Ten (10) required.

2.4 DECK EQUIPMENT

- A. Starting Platform Anchors: KDI Paragon 'Competitor' #23140DW, 10" deep, no known equal. Nine (9) required. 'Competitor' #23074, cover for dual wedge, 'Competitor' #23303, cover removal tool, two (2) required.
- B. Adjustable Starting Platforms: Track Start Competitor, rear step #24604 no known equal. Nine (9) required.
- C. Stanchion Sockets: 1.90" I.D. Bronze. KDI-Paragon 38201TC, no known equal. Eight (8) required.
- D. Stanchion Posts: 1.90" O.D. x .145 wall. KDI-Paragon, Four (4) #38105, and Four (4) #38301, no known equal.
- E. Rope Anchors: Commercial cup anchor with insert. 'Spectrum' #58316 custom stainless steel, no known equal. Twenty-two (22) required.
- F. Racing Lanes: Anti Wave' maximum 4", no known equal, verify colors with Owner prior to ordering, ten (10) required. Provide two (2) additional lanes to be utilized with stationary water polo goals as side lanes.
- G. Racing Lane Reel with Cover: KDI-Paragon #75111SS with cover #75133, no known equal. Two (2) required.
- H. Moveable Lifeguard Chair: 1.90" O.D. x .065 wall. KDI-Paragon 20302, Spectrum 20160 or equal. Two (2) required.
- I. Adjustable Figure 4 Grab Rails: KDI-Paragon #30302, 1.90" O.D. x .109" wall, no known equal. Four (4) sets required.
- J. Recessed Steps, Set of 3: KDI-Paragon #3212, no known equal. Four (4) sets of three required.
- K. Handrail: KDI Paragon 84" custom, 3 bend, 1.90" O.D. x 0.65" wall. Four (4) required.
- L. Anchor Sockets for Grab Rails & Handrails: KDI-Paragon 28102, no known equal. Twenty-four (24) required.
- M. Stainless Steel Escutcheon Plates for Grab Rails and Handrails: Spectrum Model #35214, no known equal. Twenty-four (24) required.
- N. Stationary Water Polo Goals: KDI-Paragon 36104, 36201, no known equal. Furnish complete with anchors and nets. One (1) pair required.
- O. Disabled Lift: Spectrum Traveler XRC 500 #27610 Swim-Lift II self-operated, or approved equal. Furnish complete with anchors, cover, extra battery pack and transporter cart. One (1) required.

- P. Backstroke Pennants: ‘Champion’ 3/16” diameter vinyl coated cable #50-175; ‘Champion’ hardware package #53-030, and ‘Champion’ 12” x 18” vinyl coated polyester pennants #53-020 Lincoln Equipment, Knorr Systems or equal.

Q. Pool Cover System:

1. A pool cover system as described below shall be provided and shall include all the specified features, without exception. Submittal data must include complete documentation relating to all the specified features and include manufacturer's sales literature, specification sheets, and installation/operation/maintenance manuals. Upon written request by the specifying agent, the following samples must be provided: samples of tubing used for storage reel winding tubes and end frames; a sample winding tube bearing; a sample castor wheel assembly; and a cover sample measuring at least 8" x 11", including weighted side edge, reinforced end edge, and grommet.
2. Cover Material:
 - a. Material shall be woven, 10 by 10 count per inch, high-density polyethylene, ultraviolet stabilized film fabric, laminated to both sides of 1/8" thick, closed cell, medium density, white, polyethylene foam. The woven polyethylene film fabric shall be coated on both sides with an ultraviolet stabilized, chemically resistant polyethylene coating. The combination of film, foam and woven components shall be non-toxic, non-absorbent, non-permeable and buoyant. Color shall be blue on upper surface and black on under surface. In addition to the above, cover must meet the following requirements:

Thickness	1/8-inch minus or plus 10%
Foam Density	2 lbs. per cubic foot
Weight	5 oz. per square foot
*Tensile Strength	318 lbs. (ASTM 1682264)
*Tear Strength	60 lbs. (ASTM D2261-71)
*Bursting Strength: (Mullen Tester)	425 psi (ASTM 751-73)
Service Temperature	-40°F to +160°F
K Factor	.25 BTU/sq. ft.-Hr – degrees F/inch (ASTM D2326)
Reinforced Edge Tear Strength	1225 lbs. pull strength, corner to corner
Open Seam Tear Strength	70 lbs.

3. Cover Design Criteria:

- a. Cover panels shall totally cover the surface of the pool without gaps or overlaps with reinforced cutouts to accommodate rounded corners, step areas, rails, etc. Cover panels shall be of the following quantities and sizes:

<u>Qty.</u>	<u>Size</u>
6	13 feet, 8 inch x 75 feet, 1 inch
2	10 feet, 0 inch x 24 feet, 0 inch with rail cuts

- b. Along end and side edges of each panel, a weighted material shall be sewn in and shall be continuous, non-corrosive and conform to the flat shape of the cover. End edges shall be reinforced with a double layer of polyethylene-coated film fabric and designed in such a manner as to prevent panels from dividing when the covers

are being pulled across the water. On all corners, weighted edge shall wrap corners and be itself encapsulated by the two layers of end reinforcement. The entire corner construction shall be reinforced with an 1/8" thick load dispersion plate and non-corrosive grommet.

- c. Both ends of each cover panel shall be equipped with no less than three (3) non-corrosive grommets and quick-release loops for easy connection to the storage reel or to the next cover panel. All sewing shall be ultra-violet stabilized and chemically resistant 100% polyester thread. Main body seams shall be welded, glued or heat sealed. Complete mechanical attachment with lock-stitched thread shall be required. Warning labels consistent with the recommendations of the Federal Consumer Protection Agency shall be permanently affixed to each end of each cover panel and to the sides of perimeter panels.

4. Storage Reels:

- a. The following quantity, type, and size of storage reels shall be provided:

<u>Qty.</u>	<u>Winding Tubes Per Reel</u>	<u>Length of Winding Tubes</u>
2	3	16 Foot
1	1	12 Foot

- b. Storage reel frame, winding tubes, castors, brake shafts, cranks and fasteners shall be made of type 304 stainless steel. Each reel shall have six wheels, each of which shall be 6 inches in diameter, be rated at 1150 pounds load capacity and be made of solid polyurethane. Wheels shall be lubricateable through grease fittings on stainless steel axle shafts and have stainless steel swivel yoke assemblies. The reel shall have two frame mounted, screw-type brakes with pads that lock directly to the pool deck and have a total of 18 square inches of total braking surface. Castor brakes or other types of foot-operated or lever-operated brakes will not be considered equal. Each winding tube shall be 4 1/2 inches in diameter; have a wall thickness of .120 inches; and shall consist of continuous length of tubing without joints or welds. Reels with tubes fabricated from two or more pieces of tubing joined together will not be acceptable. End frames shall be fabricated from 1 1/2-inch square Schedule 304 stainless steel box beam tubing with .120" wall thickness. To facilitate field repair, 3/8" stainless steel bolts, nuts and washers shall be used to connect major reel frame parts, wheels, brakes, bearings and winding tubes. Reels that use welding to connect these components will not be considered equal. Winding tube bearings shall be heavy duty, self-aligning, pillow block ball bearings with set screws to secure tube shafts and prevent their lateral movement. All bearings shall be lubricateable through grease fittings. Plastic surface bearings will not be acceptable.
- c. Each storage reel shall be provided with a protective cover constructed of vinyl-laminated polyester cloth, 1000 denier, totaling 13 ounces per square yard.

5. Measuring and Training:

- a. A representative of the manufacturer shall visit pool site to confirm measurements prior to fabrication of cover, and once cover is delivered, train operating personnel and supervise initial installation of cover.

6. Warranty:

- a. Cover panels shall be provided with manufacturer's three- year full replacement warranty covering defects in material and workmanship. Storage reel shall be provided with manufacturer's 10-year warranty covering defects in material and workmanship.
- R. Wet Play at Children's Pool: 'Vortex' #L2-450C play structure rated at 250 GPM installed per manufacturer's recommendations in accordance with current D.O.S.H. requirements

2.5 EXISTING CIRCULATION/BOOSTER PUMP STRAINERS

- A. 'Mer-Made' FRP standard/reducing with acrylic lid. Swimming pool - 8" x 6"; Slide booster pump - 8" x 6"; Play structure pump - 6" x 4". Provide two (2) new stainless steel strainer baskets each. Three (3) strainers total.

2.6 NEW SWIMMING POOL CIRCULATION PUMP

- A. 'Paco' #5015-7, 5" x 6" x 15"; type 'LC' end suction centrifugal pump; 1150 RPM; 208V; 3 PH; 20 HP; rated at 935 GPM @ 60 ft. TDH. 87% efficient; premium efficient TEFC motor; epoxy coat all wet surfaces. One (1) required. 'Paco', 'Aurora', or equal. (760 lbs.)

2.7 NEW SWIMMING POOL SLIDE BOOSTER PUMP

- A. 'Paco' #5095-7 5" x 6" x 9½" ; type 'LC', end suction centrifugal pump; 1150 RPM; 208V; 3 PH; 7½ HP; rated 800 GPM @ 25 ft. TDH; 87% efficient; premium efficiency TEFC motor; epoxy coat all wet surfaces. One (1) required. (760 lbs.)

2.8 NEW CHILDREN'S POOL CIRCULATION PUMP

- A. 'Pentair' Whisperflo WFK-6, 208V, 3 PH, 1½ HP rated at 99 GPM @ 60 ft. TDH with integral strainer. One (1) required. (48 lbs.)

2.9 NEW CHILDREN'S POOL BOOSTER PUMP

- A. 'Paco' #3070-7, 3" x 4" x 7" type 'LC', end suction centrifugal pump; 1750 RPM; 208V; 3 PH; 5 HP; rated at 250 GPM @ 45 ft. TDH; 87 efficient; premium efficiency TEFC motor; epoxy coat all wet surfaces. One (1) required. 'Paco', 'Aurora', or equal. (360 lbs.)

2.10 NEW SWIMMING POOL FILTERS (REPLACE IN KIND TO MATCH)

- A. 'EPD-S408' fully automatic filter hi-rate sand permanent media composite filters with 66 sq. ft of filter area rated at 990 GPM at 15 GPM/sq. ft. Complete with 8" face piping, 4" automatic backwash, seismic anchorage. Provide influent/effluent gauges. (5,055 lbs. each tank).

2.11 NEW CHILDREN'S POOL FILTER

- A. 'Pentair' TR-140 with 3" face piping hi-rate sand filter with 3" multiport valve providing 7.06 sq. ft. of filter area, rated at 106 GPM/sq. ft. of filter area. Provide influent/effluent gauges. (1,000 lbs.)

2.12 EXISTING SWIMMING POOL HEATER TO REMAIN

- A. 'Raypak' #P-2100 indoor heater with 1,999,999 BTU input; 1½" natural gas connection, 3" influent/effluent water connections; 24" ø flue to atmosphere with conc. housekeep pad with seismic anchorage.

2.13 EXISTING CHILDREN'S POOL HEATER TO REMAIN

- A. 'Raypak' #P-514 indoor heater with 511,500 BTU input; 1" natural gas connection; 2" influent/effluent water connections; 10" ø flue to atmosphere with conc. housekeep pad with seismic anchorage.

2.14 EXISTING WATER CHEMISTRY CONTROLLERS TO REMAIN (BOTH POOLS)

- A. 'BecSys 5' with auto probe rinse. Installed per schematic. Two (2) total.

2.15 EXISTING CHLORINE FEED/STORAGE SYSTEM TO REMAIN

- A. 'Chem-Tainer' 500 gallon #TC5971DC, dual storage/containment tank with seismic anchorage. Swimming pool pump – 'LMI' #C121-362SI; 96 GPD @ 120 PSI. Children's Pool feed pump – 'Stenner' #45M-HP10; 10 GPD @ 100 PSI.

2.16 EXISTING CARBON DIOXIDE STORAGE/FEED SYSTEM(S) TO REMAIN

- A. 600 lb. cryogenic storage tank with remote fill and seismic anchorage. Swimming pool/children's pool feed: 'Stranco' #C02-9 feed unite with 20-200 SCFH flow adjustment. Two (2) required.

PART 3 - EXECUTION

3.1 SURFACE CONDITIONS

- A. Inspection:
 - 1. Prior to installing the items of this Section, carefully inspect the installed Work of other trades and verify that all such Work is complete to the point where this installation may properly commence.

2. Verify that the swimming pool equipment items may be installed in strict accordance with original design, pertinent codes and regulations, and the manufacturers' recommendations.

B. Discrepancies:

1. In the event of discrepancy, immediately notify the Owner's Representative's Representative.
2. Do not proceed with installation in areas of discrepancy until all such discrepancies are fully resolved.
3. Failure to notify the Owner's Representative's Representative and give written notice of discrepancies shall constitute acceptance by the Installer of existing conditions as fit and proper to receive its Work.

3.2 INSTALLATION

- A. Supply and install items of swimming pool equipment in strict accordance with applicable codes and regulations, the original design, and the manufacturer's published recommendations, anchoring firmly and securely for long life under hard use.
- B. Coordinate with other trades to insure all imbedded items are set plumb and flush. Railing ends must have anchor sockets and escutcheon plates. Be certain that deck equipment and railings are properly bonded prior to imbedding.
- C. All equipment shall be braced and/or anchored to resist a horizontal force acting in any direction using the criteria shown on the Drawings.

3.3 INSTRUCTION

- A. The Contractor shall provide a factory certified representative(s) to start-up and certify proper installation, operation and full warranty status of all swimming pool mechanical equipment. The Contractor shall provide not less than two 8-hour days of on-site training for facility staff in the operation and maintenance of the swimming pool mechanical equipment and systems. The two 8-hour days shall be separated by a minimum of seven calendar days and be completed within the 14-day start-up period.

3.4 EQUIPMENT ACTIVATION

- A. All water chemistry and filtration mechanical equipment shall be operational upon filling of pool after plaster. Chemicals and other related support items as supplied by Contractor, shall be in supply at start-up.
- B. For the first fourteen (14) calendar days after completion of the pool plaster, brush all plastered surfaces at least twice a day and coordinate with General Contractor to ensure that the plaster is carefully maintained after the initial fourteen-day period. In addition, coordinate with the Contractor to ensure that pool filtration equipment is continuously running during the initial fourteen-day period.

- C. Start-up and provide qualified personnel to operate pool equipment for a period not less than fourteen (14) days after the pool is placed in operation, or until the Owner takes occupancy of the facility or letter of substantial completion. During this time, Contractor shall instruct and supervise the Owner's personnel in the various operating and maintenance techniques involved. Contractor shall be responsible for supply of chemicals during this not less than fourteen (14) day period and at time of turnover to Owner, chemical storage tanks shall be full. (Owner's personnel shall be fully trained and capable of assuming swimming pool maintenance tasks, training may begin before Owner takes occupancy).

3.5 CLEAN-UP

- A. Upon completion of swimming pool equipment, remove all debris, materials and equipment occasioned by this Work to the approval of the Owner's Representative's Representative.

END OF SECTION

SECTION 131107 – SWIMMING POOL MECHANICAL

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and 2018 Greenbook and City of San Diego “Whitebook”, apply to this section.

1.2 WORK INCLUDED

- A. Swimming pool mechanical piping as indicated on the Drawings for circulation and filtration systems, pool water heating systems, chemical control systems, booster pump systems and appurtenances.
- B. Domestic water system from points of connection within swimming pool mechanical equipment room to make-up water system.
- C. Filter backwash piping to point of connection with backwash retention pit as required.

1.3 QUALITY ASSURANCE

A. Qualifications of Workers:

- 1. The entity performing the work of this Section shall have been successfully engaged in the respective trade prior to commencement of the Work.
- 2. For actual construction operations, use only trained and experienced workers with experience with the materials and methods specified.
- 3. Provide at least one person who shall be present at all times during execution of the work of this Section, with experience with the type of materials being installed, the referenced standards, and who shall direct all Work performed under this Section.

B. Standards:

- 1. All equipment supplied or work performed shall comply with Chapter 31B of California Building Code, latest edition.
- 2. Work shall be performed in accordance with the applicable editions of all National, State and local codes, laws, regulations and ordinances, including the following:
 - a. American National Standards Institute (ANSI).
 - b. American Society for Testing Materials (ASTM).
 - c. American Waterworks Association (AWWA).
 - d. American Welding Society (AWS).

3. Do not construe anything in the Drawings or Specifications to permit Work not conforming to these requirements.

1.4 SUBMITTALS AND SUBSTITUTIONS

- A. Provide submittals in conformance with the requirements of Section 013300.
- B. Required submittals include:
 1. Pipe and Fittings as specified in Article 2.2 of this Section.
 2. Valves as specified in Article 2.3 of this Section.
 3. Pressure / Vacuum Gauges as specified in Article 2.4 of this Section.
 4. Pipe Hangers and Supports as specified in Article 2.5 of this Section.
 5. Sleeves and Waterstops as specified in Article 2.6 of this Section.
- C. Submit proof of qualifications as specified in Article 1.2.A of this Section.

1.5 PRODUCT HANDLING

- A. Delivery: Deliver all materials to the Project Site in the manufacturer's original unopened containers with all labels intact and legible.
- B. Storage: Store all materials under cover in a manner to prevent damage and contamination, and store only the specified materials at the Project site.
- C. Protection: Use all means necessary to protect swimming pool mechanical items before, during and after installation and to protect the installed Work specified in other Sections.
- D. Replacements: In the event of damage, immediately make all repairs and replacements necessary to the approval of the Owner's Representative and at no additional cost to the Owner.

1.6 JOB CONDITIONS

- A. Cooperate with entities performing Work specified in other Sections to so that no conflict of new construction or occupied space may occur. Should any installation Work be done without such craft coordination, that Work so installed shall be removed and re-installed.

PART 2 - PRODUCTS

2.1 PRODUCT QUALITY

- A. Materials and equipment shall be new, of the best quality for the purpose intended, and shall be clearly marked with the manufacturer's name and nameplate data or stamp and rating. As far as practicable, materials and equipment shall be of one manufacturer.

2.2 PIPE AND FITTINGS

- A. PVC Schedule 40: Type 1, normal impact, NSF approved for solvent welding applications, ASTM Specification D-1785, color shall be white. Dura, Lasco, or approved equal.
- B. PVC Schedule 80: Type 1, normal impact, NSF approved for solvent welding applications, ASTM Specification D-1785, color shall be gray. Dura, Lasco, or approved equal.
- C. CPVC Schedule 80 Influent/Effluent Heating Piping: Type 1, normal impact, NSF approved for solvent welding applications, ASTM Specification D-1785, color shall be gray. Dura, Lasco, or approved equal.
- D. PVC DR25: Conforming to ATSM D-1784, use with epoxy coated bell and spigot-type fittings or epoxy coated mechanical joint by flange adapters with epoxy coated cast iron fittings as specified in Article 2.02 (F), below. Johns-Manville "Big Blue", Diamond Plastics, or approved equal.
- E. Copper Tubing: ASTM Specification B-88, hard drawn, with ANSI Standard B16.22 wrought copper fittings.
- F. Steel: ASTM Specification A-120, Schedule 40 black or galvanized pipe with ASTM A-47 150 lb. banded malleable iron threaded fittings.
- G. Cast Iron: ASTM Specification B16.1, cast iron flanged fittings, provide epoxy coating as required for use with chlorinated water.

2.3 VALVES

- A. Ball Valves:
 - 1. For pool system: True-Union design, PTFE seat material with FPM or FKM Double O-ring stem seals, locking handle, NSF certified. PVC schedule 80 body for below grade installation. CPVC Schedule 80 body for above grade installation. Furnish ball valves on all pipe diameters 2½" or less with a rating of at least 200psi at 73°F. Asahi Pool-Pro, Ipex, or Nibco.
 - 2. For copper pipe system: 3-piece full-port Bronze body valve with Teflon seat, 'Apollo', 'Nibco' or approved equal.
- B. Butterfly Valves:
 - 1. Epoxy coated cast or ductile iron body, 316 stainless steel disc and stem, viton seat material, furnish hand wheel/gear operators on all valves 8" and larger. DeZurick, Keystone, Asahi Pool Pro, or Ipex.
 - 2. PVC body, PVC disc and EPDM construction suitable for chlorinated water applications. Stem shall be of 316 stainless steel and non-wetted. Valves shall be self-gasketed design with a convex sealing arrangement. Valves 1-1/2" – 10" shall be rated to 150 psi and 12" valves shall be rated to 100 psi at 70°F. Asahi Pool-Pro, no known equal.

- C. Check Valves: Wafer-type, epoxy coated cast or ductile iron body, 316 stainless steel plates and shaft, viton seat material. Centerline, Metraflex, or approved equal.
- D. RP Backflow Preventer: Febco #835-B for 2" and smaller; #825 for 2-1/2" and larger. Febco, Watts, or approved equal.
- E. Existing Make-up Water Control: 1½" 'Cla-Val' fill system to remain: move inside of existing surge chamber. Ductile iron, epoxy coated body with cast iron disc retainer and diaphragm washer, bronze trim, flanged globe pattern. Provide 3" air gap at fill point. Two (2) existing systems total with 1½" manual bypass.

2.4 PRESSURE / VACUUM GAUGES

- A. Furnish and install pressure and vacuum gauges on the discharge and suction sides of all pumps. 2" or 2 ½" dial, bottom connection, chrome ring, shut-off cock and snubber. Ranges shall be selected to indicate between mid-point and two-thirds of maximum range under design conditions. Marsh, Terice, or approved equal.

2.5 PIPE HANGERS AND SUPPORTS

- A. General:
 - 1. The requirements of this Section relates to various requirements of the Agreement, General and Supplementary Conditions, Specifications, Drawings, and modifying documents which are part of the Construction Contract. Responsibility for coordination of all such applicable requirements will be that of the Contractor.
- B. Description:
 - 1. This section provides guidelines and limitations for the support of all mechanical, electrical, plumbing or architectural items from the building structure, and for the seismic bracing of such items.
 - 2. Design and install all support and bracing systems as required for the swimming pool systems. Provide for attachment to portions of the building structure capable of bearing the loads imposed. Design these systems to not overstress the building structure.
- C. Quality Assurance:
 - 1. Design and install all support systems to comply with the requirements of the 2016 California Building Code, Chapter 16A.
 - 2. Seismic bracing is to be designed by a professional engineer licensed in the State of California.
 - 3. For the seismic bracing of mechanical, electrical and plumbing system, refer to "Guidelines for Seismic Restraints of Mechanical Systems and Plumbing Piping Systems" by Sheet Metal and Air Conditioning Contractors National Association, Inc., (SMACNA) for guidelines.
- D. Submittals:

1. Submit shop drawings for all substructures and attachment methods.
2. Submit proposed alternative methods of attachment for review and approval by the Architects, prior to deviating from the requirements given below.
3. For all pipe hangers and support systems, submit structural calculations and details which include all resultant forces applied to the building structure and are prepared and signed by the Contractor's licensed California professional engineer. Calculations will be reviewed for compliance with design criteria, not for arithmetic.

E. Materials:

1. Use Kin-Line, Grinnel, or approved equal.
2. Support all pipelines individually with hangers, each branch having at least one hanger. Lateral brace as noted and required.
3. Support piping near floor with steel stanchions welded to end plates secured to pipe and floor.
4. Support vertical piping at each floor level. Install coupling in piping at each support. Coupling shall rest on and transmit load to support. Isolate copper from steel supports with vinyl electrician's tape around pipe and coupling.
5. Use Stoneman "Trisolator," Unistrut, or approved equal, isolators at each hanger and other support points on bare copper tubing system.
6. For PVC pipe, space hangers four (4) feet apart for pipe sizes 1" and under, five (5) feet apart for pipe sizes 1-1/4" to 2", and six (6) feet apart for pipe sizes over 2". Space hangers for horizontal pipes at a maximum of six (6) feet for copper 2" and smaller and for steel 1-1/4" and smaller; ten (10) feet for copper 2-1/2" and larger and for steel 1-1/2" and larger.
7. Size hanger rods, screws, bolts, nuts, etc., according to manufacturer's sizing charts.
8. Trapeze hangers may be used for parallel lines.
9. Use galvanized or cadmium plated hangers, attachments, rods, nuts, bolts, and other accessories in pool mechanical room, high humidity areas, or where exposed to weather. Hot dip galvanize all items which are not factory furnished. Plating for hinged movements must be done at the factory.
10. Lateral Bracing: To prevent swaying of the piping systems, provide angle iron bracing and anchor into wall or overhead framing. Piping shall be braced or anchored in such a way as to resist a horizontal force of 50% of its operating weight in any direction.
11. Do not use wire or other makeshift devices for hangers.
12. Furnish all substructures and fasteners required to comply with the limitations given below. Use material as specified in the various sections and as appropriate to their use.

F. Guidelines & Limitations:

1. Each Contractor will coordinate the load requirements from all subcontractors so that no combination of loads overstresses the building structure or exceed the limitations given below.
2. Concrete Structure:
 - a. Support all loads hung from concrete structure with cast-in-place inserts, unless drilled-in anchors are specifically approved in writing prior to placing the concrete.
 - b. Concrete anchors must not penetrate into reinforcing bars. Where the anchors boring indicates the presence of reinforcing bar, patch hole with an epoxy type grout and relocate anchor 12 diameters away.

- c. Individual expansion anchors cannot support any loads greater than 300 pounds or manufacturer's specified load capacity without approval.
- 3. Steel Structure:
 - a. Hang no more than 20 pounds per metal deck rib in any span.
 - b. At beams, hang all beam loads greater than 40 pounds concentric to beam, not off the flanges.
 - c. Attached no loads to the beams or girders greater than the following without specific approval from the architect;
 - 1) Roof beams and girders: 300-pound point load or 600-pound total load for a single span.

G. Seismic Bracing:

- 1. Design and install seismic bracing to not ground out vibration and sound isolation systems.
- 2. All items of mechanical and electrical equipment 60" or more in height are to be seismically braced whether such bracing is shown or not.

2.6 SLEEVES AND WATERSTOPS

- A. Provide sleeves where work of this Section passes through fire rated partitions, floors and ceilings, concrete slabs or exterior of structure. Caulk clearance space using sealant appropriate for application in conformance with manufacturer's recommendations and Title 24 of California Code of Regulations. 3m, Dow Corning, or approved equal. In lieu of sleeves and caulking, "Link Seal" products may be used.
- B. Provide prefabricated waterstops as indicated on the Drawings at all pipe penetrations through structures containing stored water (i.e., swimming pools, balance/surge tanks, etc.) to insure leak-proof seals.

PART 3 - EXECUTION

3.1 SURFACE CONDITIONS

- A. Inspection:
 - 1. Prior to Work of this Section, carefully inspect the installed Work of other trades and verify that such work is complete to the point where this installation may properly commence.
 - 2. Verify that items of this Section may be installed in accordance with the original design and referenced standards.
- B. Discrepancies:

1. In the event of discrepancy, immediately notify the Owner's Representative.
2. Do not proceed with installation in areas of discrepancy until all such discrepancies have been fully resolved.
3. Failure to notify the Owner's Representative and give written notice of discrepancies shall constitute acceptance by the Contractor of existing conditions as fit and proper to receive his work.

3.2 ABBREVIATIONS AND SYMBOLS

- A. Abbreviations and symbols on the Drawings are those most commonly used. Obtain clarification from the Owner's Representative on any questionable items before bid.

3.3 GENERAL PIPING REQUIREMENTS

- A. Size any section of pipe for which size is not indicated or any intermediate section erroneously shown undersized the same size as the largest pipe connecting to it. Sizes listed are nominal.
- B. Cut pipe accurately to job measurements and install without springing or forcing, true to line and grade, generally square with building and/or structures and adequately supported to prevent undue stress on pipe, fittings and accessories.
- C. Make changes of direction with manufactured fittings. Street ells, bushings, reducing flanges, close nipples or bending of pipe is not allowed.
- D. Use great care to install piping in accordance with best practice. Plastic pipe shall be "snaked" in trenches to allow for thermal expansion.
- E. All above grade, below grade and buried or imbedded PVC shall be installed using solvent weld fittings. Also, each and every fitting and pipe end shall be prepared with solvent primer. Fittings shall be joined individually and with enough time between assembly of adjacent joints to allow them to seal solidly. After joining, an even ring of primer must be visible around the entire fitting. If any fittings are installed without visible primer, the fitting shall be removed and discarded and piping recut, rechamfered and joint made up again using a new fitting. All procedures, methods and techniques used to make up solvent weld joints shall be in strict accordance with manufacturer's recommendations.
- F. Arrange pipe and hangers to allow for expansion, contraction and structural settlement. No pipe shall contact structure except penetrations as shown on the Drawings.
- G. Provide dielectric connections between copper and dissimilar metals. In copper systems, threaded piping. Including connections to equipment shall be brass pipe and fittings. Install dielectric connections in vertical sections of piping only.
- H. Run pipe full size through shut-off valves, balancing valves, etc. Change pipe size within three (3) pipe diameters of final connection to control valves, fixtures and other equipment.
- I. Provide unions or flanges at connections to equipment, on service side of valves and elsewhere as required to facilitate ease of maintenance.

- J. Locate equipment shut-off valves as close to equipment as possible maintaining easy valve access.
- K. Make all connections between domestic water systems and equipment or face piping with approved backflow prevention devices as required.
- L. All PVC pipe exposed to direct sunlight shall be painted with two coats of Exterior Acrylic Semi-Gloss Paint, Sherwin Williams or equal. Color to be selected by the Architect. Prior to painting the PVC pipes, the exterior of all PVC pipes shall be wiped with Methyl Ethyl Ketone, or an approved equal, to remove the glaze from the pipes.
- M. The Main Drain pipe must run either level or uphill from the main drain sump, through the surge pit (if applicable) and then to the circulation pump.

3.4 TRENCH EXCAVATION AND BACKFILL

A. Excavation:

- 1. Excavate and backfill trenches as required for the Work of this Section. Conform to requirements of Section 131101.
- 2. The Contractor shall perform all excavation of every description and of whatever materials encountered, to the depths indicated on the Drawings or as necessary. The Contractor shall dispose of the excavated materials not required or suitable for backfill as directed, and shall perform such grading as may be necessary to prevent surface water from flowing into the trenches. The Contractor shall provide adequate equipment for the removal of storm or subsurface waters, which may accumulate in the excavated areas.

B. Trenching:

- 1. Excavate trenches to lines and grades as indicated on the Drawings and with banks as nearly vertical as practicable.
- 2. Bottoms of trenches shall be accurately graded to provide uniform bearing on undisturbed soil for the entire length of each section of pipe.
- 3. The width of the trench at and below the top of the pipe shall be such that the clear space between the barrel of the pipe and the trench wall shall not exceed 8" on either side of the pipe. The width of trench above the top of pipe may be wider if necessary.
- 4. Over-depth excavations shall be filled with tamped sand to required grades.
- 5. Excavations of five (5) feet or more in depth shall be shored or supported in conformance with rules, and regulations of State and Federal Governments. Shoring shall be constructed, maintained and removed in a manner to prevent caving of the excavation walls or other load on the pipe.

C. Backfilling:

- 1. Material for backfilling of pipes shall be approved granular material less than two (2) inches in diameter obtained from the excavation. No material of a perishable, spongy or otherwise unsuitable nature shall be used as backfill.
- 2. Backfilling of pipe trenches shall commence immediately after installation and testing to preclude damage to the installed pipe. Backfill around pipe shall be carefully placed so

as not to displace or damage the pipe, and shall be carried up symmetrically on each side of the pipe to one foot above the top of the pipe. The material shall be carefully compacted or consolidated before additional backfill is placed.

3. Backfill above an elevation of one foot above the top of pipe in conformance with requirements of Section 131101. Material for balance of backfill shall be approved granular material less than six (6) inches in diameter taken from the excavation.
4. Unless otherwise indicated on the Drawings, all pipe shall have a minimum of eighteen (18) inches of cover.

3.5 GENERAL EQUIPMENT REQUIREMENTS

- A. Position equipment to result in good appearance and easy access to all components for maintenance and repairs.
- B. Install piping, flues, breeching and ducts so that they do not interfere with equipment access.
- C. Install level, secure and out of moisture. Provide shims, anchors, support straps, angles, grouted bases, or other items as required to accomplish proper installation.
- D. All screws, nuts, bolts and washers shall be galvanized, cadmium plated or stainless steel. After fabrication, hot-dip galvanize unfinished ferrous items for outdoor, below grade or other use subject to moisture.
- E. Extend 1/2" Schedule 40 black steel pipe lubrication tubes from all hard to reach locations to front of equipment or to access points. Terminate with proper type of lubrication fitting.

3.6 VALVES AND STRAINERS

- A. If no shut-off is indicated, provide ball valves at inlet connections and balance valves at outlet connections to fixtures and equipment. Provide proper valve trim for service intended.
- B. Use no solder end valves unless noted otherwise; provide adapters in copper tubing systems.
- C. Locate valves with stems above horizontal plane of pipe. In general, locate valves within six (6) feet of floor, out from under equipment, in accessible locations with adequate clearance around hand wheels or levers for easy operation.
- D. Provide all valves, cocks and strainers, full pipe size unless indicated otherwise.
- E. Provide hand wheel operators on all valves 6" and larger, under 6" lever operators may be used.
- F. Provide tool operated valve with stainless steel shaft extension and 'on deck' tool operation for surge chamber butterfly isolation valve.

3.7 IDENTIFICATION OF PIPING

- A. Identify each valve by a numbered brass tag with hole and brass chain mounted on valve stem or handle. Tag to be a minimum of 1" in diameter and numbers at least 1/4" high stamped into tag. Valves and plumbing lines shall be labeled clearly with the source or destination descriptions.
- B. Install an identification chart in a plastic or glass framed enclosure, which schematically illustrates the proper operation of all piping systems and indicates number and location of all valves and control devices within the system.
- C. The direction of flow for the recirculation equipment shall be labeled clearly with directional symbols such as arrows on all piping in the equipment area. Where the recirculation equipment for more than one pool is located on site, the equipment shall be marked as to which pool the equipment serves.

3.8 TESTS

- A. Perform tests in presence of Owner's Representative with no pressure loss or noticeable leaks.
- B. Do not include valves and equipment in tests. Include connection to previously tested sections if systems are tested in sections.

- C. Perform tests as follows:

System	Test Pressure	Test Medium	Duration
Skimmer Lines and Lawson Main Drain sump lines	20 psig	Water*	4 hours
Pool Piping	50 psig	Water*	4 hours
Pool Main Drains	30 psig	Water*	4 hours
Domestic Water	150 psig	Water*	4 hours

*Never test PVC pipe or fittings with air or other gases, always use water.

3.9 PIPE MATERIAL APPLICATION

- A. PVC Schedule 40: Below grade swimming pool piping and domestic water piping up to 12" line size; use standard solvent weld fittings.
- B. PVC Schedule 80: Above grade swimming pool piping up to 12" line size; use solvent weld Schedule 80 or epoxy coated cast iron fittings.
- C. Type L Hard Copper: Above grade domestic water piping.
- D. CPVC Schedule 80; Pool Heater Piping.
- E. Schedule 40 Steel: Natural gas piping.

3.10 CUTTING AND DRILLING

- A. Cutting or drilling necessary for installation of Work of this Section shall be done only with approval of Owner's Representative.

3.11 CLOSING-IN OF UNINSPECTED WORK

- A. Do not cover or enclose Work before testing and inspection. Re-open Work prematurely closed and restore all Work damaged.

3.12 QUIETNESS

- A. Quietness is a requirement. Eliminate noise, other than that caused by specified equipment operating at optimum conditions, as directed by Owner's Representative.

3.13 FLUSHING OF LINES

- A. Flush or blow out pipes free from foreign substances before installing valves, stops or making final connections. Clean piping systems of dirt and dust prior to initial start-up.
- B. Just prior to plastering the pool, under the observations of the IOR, the pool mechanical system shall be flushed using the pool circulation pump. Circulate water through the mechanical system until the effluent water from the pool return heads runs clean.

3.14 CLEAN-UP

- A. After all Work has been tested and approved, the Swimming Pool Subcontractor shall thoroughly clean all parts of the equipment installations, including all pool pipe and fittings in the pool mechanical room. Exposed parts shall be cleaned of cement, plaster and other materials and all grease and oil spots removed with solvent.
- B. The Swimming Pool Subcontractor shall remove debris from the Project site. Cartons, boxes, packing crates and excess materials not used, occasioned by this work shall be disposed of to the satisfaction of the Owner's Representative.
- C. If the above requirements of clean up are not performed to the satisfaction of the Owner's Representative, the Owner reserves the right to order the work done, the cost of which shall be borne by the Swimming

END OF SECTION

SECTION 131108 – SWIMMING POOL ELECTRICAL

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and 2018 Greenbook and City of San Diego “Whitebook”, apply to this section.

1.2 WORK INCLUDED

- A. Provide labor, materials and equipment as required to install the swimming pool electrical system including but not limited to:
 - 1. A complete and operable system of service equipment, switchboards, panelboards, conduits, switches, time clocks and wiring for power and lighting, motor control centers.
 - 2. Junction and/or pull boxes, conduits, disconnects, starters, contactors, wiring and connection of all motors and mechanical equipment, including connection and wiring of line voltage controls associated with the mechanical systems.
 - 3. Swimming pool underwater lighting systems.
 - 4. Complete grounding system as required and shown on the Drawings.
 - 5. Adjusting and preliminary operation of the completed electrical system as described in Article 3.6, A of this Section.
 - 6. Cleaning of all completed Work and installation adjustment of all trim and decorative items.

1.3 QUALITY ASSURANCE

- A. Qualifications of Workers:
 - 1. The entity performing the work of this Section shall have been successfully engaged in the respective trade prior to commencement of the Work.
 - 2. For actual construction operations, use only trained and experienced workers with experience with the materials and methods specified.
 - 3. Provide at least one person who shall be present at all times during execution of the work of this Section, with experience with the type of materials being installed, the referenced standards, and who shall direct all Work performed under this Section.
- B. Ordinances and Codes: Materials and construction shall conform with all applicable code requirements, including:
 - 1. National Electrical Code; Electrical Safety Orders of the State of California; Department of Industrial Relations; regulations of the State Fire Marshal; rules and regulations of the Board of Underwriters of the Pacific.

2. Chapter 31 of California Building Code, latest edition.

C. Verification of Conditions:

1. The locations shown on the Drawings are diagrammatic only and the exact finish location of equipment and materials cannot be indicated. Therefore, locations of all Work and equipment shall be verified to avoid interferences, preserve head room and keep openings and passageways clear. Changes shall be made in locations of equipment and materials which may be necessary to accomplish these purposes.

D. Preliminary Operations and Testing:

1. Motor driven equipment shall be tested for correct rotation and completion of all connections.

1.4 SUBMITTALS AND SUBSTITUTIONS

- A. Provide submittals in conformance with the requirements of Section 013300.

B. Required submittals include:

1. Conduit and Fittings as specified in Article 2.2 of this Section.
2. Panelboards as specified in Article 2.6 of this Section.
3. Circuit Breakers as specified in Article 2.7 of this Section.
4. Motor Starters as specified in Article 2.10 and 2.11 of this Section.
5. Fuses as specified in Article 2.13 of this Section.
6. Time Clocks as specified in Article 2.14 of this Section.
7. Ground Fault Circuit Interrupters as specified in Article 2.15 of this Section.

- C. Submit proof of qualifications as specified in Article 1.2.A of this Section.

1.5 PRODUCT HANDLING

- A. Delivery: Deliver all materials to the Project Site in the manufacturer's original unopened containers with all labels intact and legible.
- B. Storage: Store all materials under cover in a manner to prevent damage and contamination, and store only the specified materials at the Project site.
- C. Protection: Use all means necessary to protect swimming pool electrical materials before, during, and after installation and to protect the installed Work specified in other Sections.

PART 2 - PRODUCTS

2.1 MATERIALS, GENERAL

- A. Materials shall be new, in unbroken packages and bear the U.L. label of approval.
- B. Equipment of one type shall be by same manufacturer. One type of equipment for classifications such as:
 - 1. Switchboards, panels, buss duct, disconnect switches and allied items.
 - 2. Conduit.
 - 3. Wire.
 - 4. Conduit fittings.
 - 5. Fixtures of the same general type.
 - 6. Wiring devices.

2.2 CONDUIT AND FITTINGS

- A. Conduit within or under buildings or where exposed outdoors shall be rigid threaded, hot dipped, galvanized, or U.L. approved plastic except where noted otherwise on the Drawings. Metallic conduit shall be of the same metal between outlets or terminals.
- B. Use flexible metallic conduit only for short connections of motors and where specifically called for on Drawings. Maximum length shall be 40". Use only liquid tight flexible metal conduit. Install an unbroken #12 AWG insulated copper grounding conductor in each liquid tight flexible conduit with permanent connection at motor junction box and service panel ground.
- C. Protect, before installation, metallic conduit runs in all slabs laid on grade or in contact with the earth or exposed in damp locations, with two (2) heavy coats of asphaltum rust-resisting compound.
- D. Encase conduits 2-1/2" or larger run underground, outside, or under buildings, in concrete envelopes a minimum of 3" thick, except as indicated otherwise on Drawings or stubouts. Conduits 2 and smaller laid 18" below finish surface in soil.
- E. Low voltage runs underground outside buildings, 1-1/4" or smaller, may be G.I. or sherardized steel conduit, with machine applied wrapping equal to double wrap or Scotch-Wrap #50 tape, half lapped and quadrupled at joints in lieu of concrete encasement.
- F. Service conduits through foundations or concrete members shall run through metal sleeves with adequate clearances for full movement of the conduit. Do not run conduits through footings.
- G. Secure conduits run exposed on surfaces with one hole heavy-duty straps or fasten with matching fittings to inserts or trapezes, parallel to building walls and ceilings.
- H. Cap all conduit or duct stub-outs with standard factory caps; except cap threaded steel conduit with B.I. water pipe caps in outdoor locations.

- I. Use conduit fittings as manufactured by Crouse-Hinds Company, Appleton Electric Co., or approved equal.
- J. Employ U.L. liquid tight fittings for use with liquid tight flexible metal conduit.
- K. Use unions as manufactured by Appleton, O-Z/Gedney, or approved equal. The use of running threads will not be permitted.
- L. Exposed conduit in chemical rooms shall be rigid NEMA 3R Type suitable for installation in corrosive atmospheres.

2.3 GROUNDING

- A. Bond together and ground to a common ground at a single point all metallic conduit, piping systems, pool reinforcing steel, metal parts of ladders, lifeguard stands, handrails and their supports and the like. The bonding conductor shall not be smaller than #8 copper.

2.4 WIRING CONNECTIONS

- A. Make connections without strain on conductors, allowing the conductors to take a natural position after connections or taps are made. Include all strand of wire in making the connection.
- B. Make connections for wiring by one of the following means:
 - 1. Make all taps or connections to conductors with compression type connectors except those smaller than #8 B&S gauge may have soldered connections. Solderless connections for #10 AWG or smaller may be used and shall be "Scotchlok", Buchanan, or approved equal. For #8 AWG or larger, they shall be T&B "LockTite", Burndy "Versitaps", or approved equal.
 - 2. All cable or conductor terminal lugs shall be Burndy "Quicklug", IlSCO, or approved equal. Two-piece stamped lugs and solder lugs will not be approved.
 - 3. Paint taped splices in damp or outdoor locations with two (2) coats of insulating paint.
 - 4. Tag all branch circuit wires with circuit number at the panelboard and at each point of use with linen or plastic tags.

2.5 CONDUCTORS

- A. Copper RHW or THW. Do not make splices between boxes.

2.6 COLOR CODING

- A. Neutrals (identified conductors shall be white).
- B. Phase conductors shall be red for phase B; blue for phase C.
- C. Green shall be used for mechanical equipment and receptacle grounds only.

2.7 MOTOR WIRING

- A. Make final connections to motors with the required AWG (Minimum #12), Flamenol machine tool wire, 19 strand. Control wiring for equipment shall be Flamenol machine tool wire, 19 strand of required AWG. Provide junction boxes at each item of equipment to change from standard building wiring to machine tool wire.
- B. Phase motors as proper in direction of rotation.

2.8 PANELBOARDS

- A. Panelboards shall be flush or surface mounting as indicated with circuit breakers as shown on panel schedule, hinged lockable doors, index card holders and proper bussing.
- B. Where indicated on the drawings, panelboards shall be furnished with subfeed breakers and/or lugs, split bussing, contractors, time switches, relays, etc., as required.
- C. All panelboards shall be keyed alike.
- D. All panelboards shall be finished with one coat of zinc chromate and coat of primer sealer after a thorough cleaning where exposed to public view (e.g., corridors, covered passages, offices, etc.) and gray in switchboard, janitor's heater and storage rooms. Prime coated panelboard shall be painted to match surroundings after installation. Panelboards shall be fabricated of sheet steel of the following minimum gauges: Doors and trim #12; enclosure - code gauge steel.
- E. Furnish all panelboards and terminal cabinets with Yale 46515 flush locks and LL806 keys except where indicated otherwise herein. Fasten the trim to panel boards and terminal cabinet by means of concealed, bolted or screwed fasteners accessible only when the door is open.
- F. Panelboards 208/120 volt, three phase, 4 wire, S/N or 120/240 volt, single phase, 3 wire, S/N.
Panelboard types as manufactured by:

Westinghouse	Type B10B
General Electric	Type NLAB
Square D	Type NQOB
- G. Panelboards for 480/277 volt, three panes, 4 wire, S/N.
Panelboard types as manufactured by:

Westinghouse	Type Pow-R-Line 2
General Electric	Type AE
Square D	Type NEHB
Sylvania	Type NH1B
I.T.E.	Type Approved Equal
- H. Panelboard for bussing sizes thru 400 amp shall be 20" wide surface mounted type. Recess mounted type shall have a 20" wide (maximum) recess metal enclosure with trim plate cover extending 1" on all sides of enclosure. Depth shall be 5-3/4" nominal. Height of panel as required for devices.

- I. Provide 6" additional gutter space in all panels where double lugs are required, or where cable size exceeds bus size. Minimum bottom gutter space shall be 6" high. 12" additional gutter space may be required for aluminum feeders where used.
- J. Panelboards shown on the drawings with relays, time clocks or other control devices shall have a separate metal barriered compartment mounted above panel with separate hinged locking door to match panelboard. Provide mounting sub-base in cabinet for control devices and wiring terminal strips.
- K. Panelboard shall have a circuit index card holder removable type, with clear plastic cover. Index card shall have numbers imprinted to match circuit breaker numbers.

2.9 CIRCUIT BREAKERS

- A. Breakers shall have a minimum short circuit interrupting rating of 10,000A symmetrical for panelboard voltage thru 240 volt and 14000A for panelboards thru 600 volts or as specified on the drawings. In no case shall the interrupting rating be less than the bus withstand rating unless noted otherwise on the drawings.
- B. Circuit breakers as manufactured by the following companies only are acceptable:
 - 1. General Electric Company
 - 2. Square D Company
 - 3. Westinghouse Company
 - 4. I.T.E. Company
- C. Circuit breakers shall be arranged in the panels so that the breakers of the proper trip settings and numbers correspond to the numbering in the panel schedules on the drawings. Circuit numbers of breakers shall be black-on-white micarta tabs or other previously approved method. Circuit number tabs which can readily be changed from front of panel will not be accepted. Circuit number tabs shall not be attached to or be a part of the breaker.
- D. Where two or three pole breakers occur in the panels, they shall be common trip units. Single pole breakers with tie-bar between handles will not be accepted.
- E. All circuit breakers shall be padlockable in the "off" position. Locking facilities shall be riveted or mechanically attached to the circuit breaker (submit sample for approval). Other means of attachment shall not be accepted without prior written approval of Architect.
- F. Where branch circuit breakers supply the power to motors and signal systems, the breakers shall be furnished with lockout clips, mounted in the "on" position. The breakers shall be able to trip automatically with lockout clips in place.
- G. Panelboard circuit breakers shall be bolt-on type.

2.10 BUSSING

- A. Bussing shall be rectangular cross section copper, or full length silver or tin-plated aluminum.

- B. Bussing shall be braces to withstand symmetrical short circuit ratings as follows or as noted on drawings. In no case shall bus short circuit bracing be less than specified circuit breakers.
- C. Each panelboard shall be equipped with a ground bus secured to the interior of the enclosure. The bus shall have a separate lug for each ground conductor. No more than one conductor shall be installed per lug.

2.11 TERMINAL CABINETS

- A. Terminal cabinets shall be fabricated of code gauge sheet steel for flush mounting (except where noted a surface) of size indicated on the drawings, and complete with hinged lockable doors and the number of 2-way screw terminals required for termination of all conductors. Terminal cabinet locks to operated form same key used for panelboards. The trim to terminal cabinets shall be fastened by means of concealed bolted or screwed fasteners accessible behind door to terminal cabinets. Terminal cabinets shall have 5/8" plywood backing. Cabinets shall be finished with one coat of zinc chromate and one coat of primer sealer after a thorough cleaning where exposed to public view Prime coated cabinets shall be painted to match surroundings after installation.
- B. Provide engraved nameplate on each cabinet indicating its designation and system (i.e., Swimming Pool - Panel 'SP').

2.12 MOTOR CONTROL INDIVIDUAL STARTERS

- A. Manual Motor Starters:
 - 1. Provide flush or surface mounting manual motor starters with number of poles and size of thermal overload heaters as required for the motor being controlled (equipped with overload heaters, one for each motor lead). Back boxes shall be supplied with all flush mounting starters whether they are toggle type requiring only a 4" square outlet box or the larger type requiring a special box and cover designed to accept the particular unit.
 - 2. Unless otherwise noted on the drawings, all manual starters for single phase motors, smaller than 1 h.p., shall be the compact toggle type. Manual starters for all single phase motors, 1 to 5 h.p., and all three phase motors up to 5 h.p. shall be the heavy duty type.
 - 3. Where manual motor starter is shown with pilot light, the pilot light shall be installed in a separate outlet box adjacent to the starter outlet, and engraved nameplate in indicate function of pilot light.
 - 4. The following motor starters as manufactured by:

Manufacturer	Single Phase 1HP and Below	Others
Arrow Hart	Type RL	Type LL
General Electric	CR 101	Class CR 1062
I.T.E.	Class C10, C11 or C12	Class C20
Square D Company	Class 2510, Type A	Class 2510, Type B & C
Westinghouse	Type MS	Type A100

Allen Bradley

| Approved Equal

| Approved Equal.

B. Individual Magnetic Motor Starters:

1. Magnetic motor starters shall be A.C. line voltage, across-the-line units in NEMA Type I enclosure, unless other types of enclosures are indicated.
2. All starters located outside of a building whether or not indicated shall be W.P. (weatherproof), and all starters noted W.P. shall be furnished in NEMA type 4 cast or stainless steel enclosures.
3. Starter shall be horsepower rated for the motor controlled, and shall be equipped with properly sized overload elements. Every pole shall be with overload element.
4. Verify the exact motor current and voltage characteristics with the Contractor supplying the motor before installation of a starter.
5. Each starter shall be equipped with "Hand-Off-Auto" switch or stop-start pushbutton as required.
6. Coils shall be designed to operate on voltage indicated on control diagrams and have built-in-under the voltage release for coil circuit to drop motor starter off the line when the line voltage drops below normal operating voltage.
7. The coil control circuit shall be independently fused, sized to protect coil.
8. Starters to be equipped with running pilot light indication with a "Push-to-Test" feature.
9. Magnetic starters shall have a minimum of two auxiliary contacts. Additional auxiliary contacts shall be provided as required to comply with the requirements of the wiring diagrams on the electrical and mechanical drawings and the description of the function in the Mechanical Section of the Specifications.
10. Minimum starter size shall be NEMA size I unless indicated otherwise.
11. The following types of magnetic motor starters as manufactured by:

Manufacturer	Type
General Electric	Class CR 106
I.T.E.	Class A20
Square D Company	Class 8536
Westinghouse	Type A200 (Size 4 Max.) or Class II-200 (Sizes 5-8)

2.13 INDIVIDUAL COMBINATION MOTOR STARTERS

- A. Combination starter shall incorporate fused disconnect switch and individual magnetic motor starter in a common enclosure. Combination starters shall be mounted in general purpose enclosures unless otherwise indicated on the plans. Starters shall comply with NEMA standards, size and horsepower as indicated on drawings General Electric, Square D, Westinghouse or I.T.E.
- B. The disconnect handle used on combination starters shall control the disconnect device with the door opened or closed. The disconnect handle shall be clearly marked as to whether the disconnect device is "ON" or "OFF", and shall include a two-color handle grip, the black side visible in the "OFF" position indicating a safe condition, and the red side visible in the "ON" position indicating an unsafe or danger condition.

- C. All starters used in combination starters shall be manufactured in accordance with the latest published NEMA standards, sizes, and horsepower ratings. These starters shall be furnished with three melting alloy type thermal overload relays.
- D. Thermal units shall be of one-piece construction and interchangeable. The starter shall be inoperative if a thermal unit is removed.

2.14 MOTOR CONTROL INTERLOCKS AND CONTROL DEVICES

- A. Refer to mechanical and plumbing drawings and specifications and provide all control devices including timeswitches, relays and interconnection of starters of required.
- B. Mount all relays and timeswitches in a separate compartment in motor control center unless otherwise indicated.
- C. Whether shown on mechanical and plumbing drawings or control center schedules or not, where motors are controlled by external devices (i.e., thermostats, relays, float or pressure switches, etc.) or interlocked with other motors, each motor starter to be equipped with a "Hand-Off-Auto" selector switch in starter cover. Other starters equipped with a "Start/Stop" pushbutton station in starter cover.

2.15 FUSES

- A. Fuses shall be dual element, current limiting type, U.L. Class RK5 unless otherwise indicated on the drawings. Provide one spare set of fuses of each size and type in each motor control center.

2.16 TIME CLOCKS

- A. Time clocks shall be provided for all underwater lighting systems and swimming pool circulation pumps not controlled by filter microprocessors.
- B. Contacts shall have a minimum rating of 40 amperes at 277V.
- C. Timing motor shall be heavy duty synchronous, self starting, high torque type, and shall be rated at 120, 208, 240, 277 volt 60 Hz.
- D. Motor shall operate normally at temperature range of -60 degrees Fahrenheit to +120 degrees Fahrenheit.
- E. Dial shall be 3" diameter, clearly calibrated with day/night zones and 24 hour rotation, with gear to provide one revolution yearly which automatically varies the on/off settings each day according to seasonal changes. Day and month of the year shall show clearly through calendar window on the dial.
- F. Time clocks shall be equipped with 7-spoke omitting wheel marked with days of the week.

- G. Time clocks shall be housed in a flush enclosure where supply circuits emanate from a flush mounted panelboard and surface enclosure when supply circuits are from a surface mounted panel.
- H. Acceptable manufacturers are Tork, Paragon, or approved equal.

2.17 GROUND FAULT CIRCUIT INTERRUPTERS

- A. Minimum rating shall be 20 amperes, 125V, 5 milliampere trip setting, Class A per UL943.
- B. Manufacturer to be Crouse-Hinds, Leviton, or approved equal.

2.18 BOXES

- A. Boxes shall be of the size required by ordinances or larger, and of pressed galvanized code gauge steel where concealed or exposed on ceilings. Exposed boxes on walls below 7'6" shall be cast steel similar to "FA" condulets.
- B. Outlets to be surface where wiring is exposed and flush in areas where conduit is concealed.
- C. Provide surface outlets with proper galvanized steel surface cover. Box and cover shall be deep enough to provide at least 1/4" clearance between back of device and back of box. Where box contains more than one device, use proper gang box with proper cover. Surface outlet boxes shall be of the threaded hub type wherever below 8'0".
- D. Provide exposed junction boxes with proper flat blank galvanized cover. If necessary for cable installation, additional pull boxes or junction boxes may be installed in accessible locations.
- E. Where pull boxes larger than outlet boxes are required, galvanized code gauge sheet steel boxes may be used with covers attached by brass machine screws. Boxes exposed to the weather shall be approved for the purpose, and conduit entrances shall be on the bottom made by means of an interchangeable hub with gasket and adapter nut. Pull boxes not shown on Drawings may be added only after approval of size and location is obtained.
- F. For outlets exposed to weather or where noted, cast outlet boxes shall be Crouse-Hinds, Appleton, or approved equal. Boxes shall have proper number and size hubs. Device plates, covers, adapters and boxes shall be as manufactured by Crouse-Hinds, Appleton, or approved equal.
- G. Exposed junction boxes, outlet boxes and pull boxes for pool chemical rooms shall be NEMA 3R type suitable for corrosive atmosphere, non-metallic.

2.19 IDENTIFICATION MARKINGS

- A. Plainly mark all motor and electrical appliance control equipment indicating the equipment controlled with engraved metal tags.

- B. Provide laminated plastic nameplates on panelboards on the outside of the door at the top indicating panel designation and feeder source.
- C. Provide laminated plastic nameplates on distribution switchboards and motor control centers at the top center indicating panel designation and feeder source.
- D. Identify each distribution switchboard and motor control center circuit breaker with a laminated plastic nameplate indicating its' use.
- E. Type panelboard directories on the forms provided with the equipment, indicating the use of each branch circuit breaker.
- F. Fasten all laminated plastic nameplates to surfaces with two (2) or more screws.

PART 3 - EXECUTION

3.1 INSPECTION

- A. Verify conditions at the Project site before submitting bid. Be responsible for providing all necessary wiring for the new electrical systems. Wherever wiring is being disrupted due to remodeling or changes, reconnect existing and provide new wiring circuits to accomplish a fully operable system at no additional cost to the Owner.

3.2 COORDINATION

- A. The Drawings are essentially diagrammatic and indicate the desired location, size, routes, connection points, etc., and are to followed as closely as possible. Proper judgment must be exercised in executing the Work so as to provide the best possible installation in the available space and to overcome difficulties, limitations or interference wherever encountered. Be responsible for the correct placement of this Work, the proper location and connection in relation to Work of other trades, for determining the exact location of all conduits, outlets and equipment, and for installing the conduits in such a manner as to conform to the structure, avoid obstruction, preserve headroom and keep openings and passageways clear. Particular attention is directed to the close coordination required on exposed Work. Locations shown on Architectural or Mechanical Drawings if different than those shown on Electrical Drawings should be communicated to the Owner's Representative in writing for clarification.

3.3 INSTALLATION

- A. Trenching and Backfill: Conform with requirements of Section 131101. Provide minimum cover as required by Code.
- B. Conduit Installation:

1. Conduit and metallic raceway systems shall be mechanically and electrically continuous from sources of current to all outlets in a manner to provide a continuous grounding path. Close ends of conduit during construction to prevent entrance of dirt or moisture.
2. Securely fasten conduit to the building construction within three feet of each outlet and within every ten feet thereafter. Secure it to boxes, cabinets, pull boxes, terminals with two locknuts and ends equipped with bushings or a terminal fitting. Cut square with ends carefully reamed.
3. Make bends or elbows so that the conduit will not be injured or flattened.
4. Use insulated metallic bushings in all places where bushings are required.
5. Run exposed conduits level or plumb and parallel to the construction members of the building. No cutting across or diagonal runs will be permitted. Neatly surmount structural obstructions encountered on conduit runs by the use of fittings or pull boxes.
6. Identify feeder conduits by stamped metal tags secured to exposed section of conduit in main or sub-panels.
7. Make up all threaded conduit joints gas and watertight with conductive sealer except conduit above ground in dry indoor locations.
8. Rigidly support all boxes independently of the conduit system.

C. Connections to Equipment:

1. Fully connect, in an approved manner, all electrical outlets, apparatus, motors, equipment, fixtures, wiring devices and appliances whether they are installed under the Electrical Contract or not, which require electrical connections, to the corresponding electrical system outlet.
2. Where the Work of this Section requires connections to be made to equipment that is furnished and set-in-place under other Sections, obtain such roughing-in dimensions from the manufacturer or supplier of each item as required and assume full responsibility for the installation of the connections thereto.

3.4 ADJUSTMENT AND CLEAN-UP

- A. Preliminary Operation: Should the Owner's Representative deem it necessary to operate the electrical installation or any part thereof prior to Substantial Completion of the Work, consent to such preliminary operation and supervise conduction of same. Subcontractor shall pay all costs occasioned by such operation. Preliminary operation shall not be construed as an acceptance of any Work installed under this Contract.
- B. Clean-up: Upon completion of the Work of this Section, immediately remove all swimming pool electrical materials, debris and rubbish occasioned by this Work to the approval of the Owner's Representative.

END OF SECTION

SECTION 131413 - FIBERGLASS WATERSLIDE

PART 1 GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and 2018 Greenbook and City of San Diego “Whitebook”, apply to this section.

WORK INCLUDED

- A. Design, manufacture and installation of the fiberglass waterslide indicated on the Drawings, specified herein, and as necessary for proper completion, including, but not necessarily limited to:
 - 1. Fiberglass flume components.
 - 2. Flume structural support systems.
 - 3. Foundations as required for flume structural support systems.
 - 4. Stairway and tower components.
 - 5. Waterslide tower shade structure.
 - 6. Waterslide tower lighting.
 - 7. A complete Emergency Stop System as required by DOSH and/or the Department of Environmental Health.
 - 8. DOSH signage/forms and certification.

1.2 QUALITY ASSURANCE

- A. Qualifications of Suppliers and Personnel:
 - 1. The waterslide flume supplier shall have prior experience in the fabrication of fiberglass waterslides.
 - 2. The waterslide flume installer shall have prior experience in the installation of fiberglass waterslides.
 - 3. All welding shall be performed by operators who are qualified as prescribed in “Qualification Procedure” of the American Welding Society, and welding shall be performed only under field welding or shop welding.
- B. Codes and Standards: In addition to complying with all applicable codes and regulations, comply with pertinent recommendations contained in:
 - 1. Waterslide flumes shall conform to requirements of the “Suggested Health and Safety Guidelines for Recreational Water Slide Flumes,” July 1981, as published by the U.S. Department of Health and Human Services, Public Health Service, Centers for Disease Control, Atlanta, GA.
 - 2. “Specification for the Design, Fabrication, and Erection of Structural Steel for Buildings,” of the American Institute of Steel Construction.

3. "Code for Welding in Building Construction," of the American Welding Society.
 4. "Specifications for Architecturally Exposed Structural Steel," of the American Institute of Steel Construction.
 5. "Manual of Standard Practice for Detailing Reinforced Concrete Structures," Publication ACI 315-74 of the American Concrete Institute.
 6. "Structural Concrete for Buildings," Publication ACI 301-72 of the American Concrete Institute.
 7. State of California DOSH Codes and Regulations.
- C. Where provisions of pertinent codes and standards conflict with this Specification, the more stringent shall govern.

1.3 SUBMITTALS AND SUBSTITUTIONS

- A. Provide submittals in accordance with the requirements of Section 013300.
- B. Shop Drawings: Within thirty (30) calendar days of issuance of Notice to Proceed, and before any materials are delivered to the job site, submit the following shop drawings to the Owner's Representative for approval:
1. Slide path design with X, Y and Z (elevation) coordinates.
 2. Flume component details, including interface at slide entry and exit.
 3. Flume structural support system details.
 4. Foundation plan and details as required for flume structural support.
 5. Stairway and tower components and foundations. Stairway to be galvanized steel with concrete infill.
 6. Waterslide tower shade structure. Provide top of tower shade canopy to match shade structures.
 7. Waterslide lighting.
 8. A complete Emergency Stop System as required by DOSH and/or the Department of Environmental Health.
- C. Show all shop erection details including cuts, copes, connections, holes, threaded fasteners, rivets and welds.
- D. Show all welds, both shop and field, by the currently recommended symbols of the American Welding Society.
- E. All shop drawings and calculations shall be certified and sealed by a Professional Engineer, registered and licensed as same in the State of California.
- F. The slide manufacturer shall certify to the Owner's Representative that the depth and configuration of the receiving pool is acceptable and compatible with all known safety standards for the manufacturer's designed product.
- G. Proofs of Compliance: Submit proofs of compliance to the Owner's selected testing laboratory in accordance with Section 014500.

- H. Provide all maintenance manuals, operational manuals, signage, warnings, certifications, guarantees, inspections, etc. as required to receive DOSH compliance and conform to all DOSH requirements.

14 PRODUCT HANDLING

- A. Delivery: Deliver all materials to the Project Site in the manufacturer's original unopened containers with all labels intact and legible.
- B. Storage: Store all materials under cover in a manner to prevent damage and contamination, and store only the specified materials at the Project site.
- C. Protection: Use all means necessary to protect fiberglass waterslide components and support systems before, during, and after installation and to protect the installed work of all other trades.
- D. Replacements: In the event of damage, immediately make all repairs and replacements necessary to the approval of the Owner's Representative and at no additional cost to the Owner.

1.5 GUARANTEE / WARRANTY

- A. All work of this Section shall be warranted against all defects of material and/or application for a period of one (1) year from date of acceptance. Any failures that may occur within this warranty period, due to defective installation and/or materials, shall, upon written notification of such failure, be immediately repaired or replaced.

PART 2 PRODUCTS

2.1 FIBERGLASS FLUME COMPONENTS

- A. Fiberglass Laminate Materials:
 - 1. Gelcoat: Interior gelcoat shall be a high quality isophthalic polyester gel, .02" in thickness, with added ultraviolet inhibitors.
 - 2. Spray Up Lamination:
 - a. First Step- Resin #010W2209:
 - 1) Gelcoat- 18 to 24 mils wet.
 - 2) 3 oz. chop/square foot.
 - 3) 18 oz. woven roving.
 - 4) Allow to set.
 - b. Second Step- Filled Resin #010W1817:
 - 1) 1-1/2 oz. chop/square foot, apply balsa or wood reinforcement.
 - 2) 1-1/2 oz. chop/square foot over entire area.

- 3) Exterior gelcoat application to cover.
3. Structure: 3/16" to 1/4" body thickness, 1/4" to 3/8" flange thickness, minimum 32 oz. / square foot weight.
- B. Joints, Connections and Seams:
 1. Flume to flume joints shall be fastened with 3/8" stainless steel bolts, washers (2 per bolt) and self-locking nuts.
 2. Flume to support system connections shall be made with stainless steel hardware.
 3. Fiberglass seams shall be made up using waterproof caulking to be provided by fiberglass slide manufacturer.
- C. Color: Manufacturer shall provide standard color samples to Owner's Representative for selection as a part of the shop drawings. Color shall be integral to the fiberglass and the same top and bottom (inside and out).
- D. Ride Configuration: Acceptable manufacturers include 'Vortex' Slide #WS3263 or Waterwater West Industries, Columbus, Ohio.

SLIDE LENGTH:
72'-2"

SLIDE HEIGHT:
10'-8"
- E. Required Components: All waterslide configurations shall be furnished with the following components:
 1. Slide entry section / start piece.
 2. Pool entry section / end piece.
 3. Factory pre-drilling of all sections.
 4. Waterproof caulking as required for seams.
 5. Stainless steel assembly hardware.

2.2 FLUME STRUCTURAL SUPPORT SYSTEM / WATERSLIDE ACCESS TOWER

- A. Components: The flume structural support system / waterslide access tower shall consist of all elements necessary to safely and securely support the fiberglass waterslides from the slide entry to the shutdown lanes, including, but not limited to:
 1. Concrete footings and foundations.
 2. Columns and support arms.
 3. Support yokes.
 4. Stairs with DOSH edge trim of contrasting color, landings, guardrails and handrails.
 5. Connecting hardware.
- B. Design:

1. Structural support systems /waterslide access tower shall be designed to safely support the fiberglass slides given the following design criteria: Seismic, wind speed, and live loading per CBC, latest edition for the State of California.
2. All concrete footings/foundations shall have a minimum 28-day compressive strength of 3,000 psi.

C. Bolts and Nuts:

1. High Strength Bolts:
 - a. All high strength bolts shall meet the requirements of ASTM A-325.
 - b. Use high strength friction bolts for all bolted connections unless otherwise indicated.
 - c. Make bolt holes 1/16 inch larger than nominal bolt diameter.
2. Machine Bolts and Anchor Bolts: All machine bolts and anchor bolts shall meet the requirements of ASTM A-307.

2.3 GALVANIZED STRUCTURAL SUPPORT SYSTEMS

- A. Fabrications should arrive at site galvanized and ready for installation per manufacturer's recommendations.
- B. All support systems shall be galvanized, all field welds and fabrications shall be galvanized, all installation defects shall be field touched up to match.

2.4 EMERGENCY STOP BUTTONS

- A. 2 ½" diameter red mushroom momentary contact switch, with pushbutton operator, in a Nema 4 weatherproof junction box as required by DOSH and/or the Department of Environmental Health. Provide a manual reset in the pool mechanical room.

2.5 OTHER MATERIALS:

- A. All other materials, not specifically described but required for a complete installation of fiberglass waterslides, shall be new, free from rust, first quality of their respective kinds, and subject to the approval of the Owner's Representative.

PART 3 EXECUTION

3.1 SURFACE CONDITIONS

- A. Inspection:

1. Prior to installation of the work of this Section, carefully inspect the installed work of other trades and verify that all such work is complete to the point where this installation may properly commence.
2. Verify that fiberglass slides and structural support systems may be fabricated and erected in strict accordance with the original design, the approved Shop Drawings and the referenced standards.

B. Discrepancies:

1. In the event of discrepancy, immediately notify the Owner's Representative.
2. Do not proceed with fabrication or installation in areas of discrepancy until all such discrepancies are fully resolved.

3.2 FABRICATION

- A. General: Fabricate all fiberglass slides, structural support systems and waterslide access tower in strict accordance with the approved Shop Drawings and the referenced standards.
- B. Shop Cleaning and Galvanizing:
 1. Galvanize all structural steel components.
 2. Thoroughly clean all steel to be encased in concrete.

3.3 GRADING, EXCAVATION AND BACKFILL

- A. Conform with requirements of Section 131101 and in strict accordance with the approved Shop Drawings.

3.4 INSTALLATION OF FOOTINGS AND FOUNDATIONS

- A. Conform with requirements of Section 131102 and install in strict accordance with the approved Shop Drawings.

3.5 WELDING

- A. General:
 1. For details of joints, comply with requirements for AWS joints accepted without qualification tests.
 2. Use ASTM A-233, E-70 series electrodes.
 3. Follow applicable sections of AWS specifications.
- B. Types of Welds (unless otherwise noted):
 1. Make all fillet welds 3/16 inch minimum.
 2. Make all butt welds full penetration welds, using back-up or chip and back-weld.

3.6 ERECTION

- A. General: Erect all fiberglass waterslides and structural support systems in strict accordance with the approved Shop Drawings and all pertinent regulations and standards.
- B. Tolerance: Align all structural steel straight, plumb, and level with a tolerance of one in 500.
- C. Touch-up: After erection is complete, touch-up all shop priming coats damaged during transportation and erection, and prime all field welds, using the priming paint specified for shop priming.
- D. Fiberglass Joints: All flange to flange connections shall be made utilizing the waterproof caulking supplied by the fiberglass manufacturer and shall be joined in such a way as to provide for a safe and matless ride.

3.7 EMERGENCY STOP BUTTON

- A. Install the Emergency Stop Button(s) in strict conformance with the plans and specifications and as required by DOSH and/or the Department of Environmental Health.

3.8 CLEAN-UP

- A. Upon completion of the work of this Section, immediately remove all fiberglass, structural support system materials, debris and rubbish occasioned by this work to the approval of the Owner's Representative and at no additional cost to the Owner.

END OF SECTION

SECTION 13 31 00 – FABRIC STRUCTURES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Fabric Structures: Provide design, engineering, permitting, inspections, materials, shop fabricated sails, shipping, unloading, field installation of posts, footings and prefabricated sails for a complete functional structure using the Project construction documents as the Basis for Design.

1.3 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Catalog data for fabric, thread, cable, cable connectors, turnbuckles, shackles and other attachment hardware and accessories.
 - 2. Fabric color samples for initial color selection
- B. Warranty
 - 1. Sample of Manufacturer's warranty
- C. Shop Drawings:
 - 1. Include dimensioned plans, elevations, sections, details and engineering calculations.
 - 2. Permitted drawings and calculations
- D. Samples:
 - 1. Minimum 18-inch x 18-inch samples showing fabric, perimeter stitching, corner reinforcing and corner connectors

1.5 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data:

1. Operation and maintenance instructions
2. Manufacturer's Special warranty

1.6 QUALITY ASSURANCES

- A. Single-vendor contractual responsibility for all phases of the design-build process (i.e. design, engineering, fabrication, shipping, unloading, footing construction, structure erection, & warranty servicing)
1. Design & Engineering
 - a. To current, local California building code by Professional Structural Engineer licensed in California
 - b. PE must have successfully designed/engineered previous commercial, cable-tensioned shade sail structures prior to commencement of work.
 - c. Wind design speed: 110+ MPH 3-second wind gusts with fabrics attached
 2. In -Plant Fabrication
 - a. Fabricator shall have successfully fabricated previous shade sail structures prior to commencement of work.
 - b. To ensure fit & finish, fabricator will provide steel work and fabricated shade sails
 - c. Submit City of San Diego Certificate of Compliance for Off-site fabrication fabricator's license
 - d. All materials shall be free of sharp edges, corners, & extremely rough surfaces
 - e. All materials shall be new and conform to all specifications as herein stated
 3. Installation
 - a. The entity performing the work of this Section shall have been successfully engaged in the respective trade prior to commencement of work.
 - b. For actual construction operations, use only trained and experience workers with experience with the materials and methods specified.
 - c. Provide at least one person who shall be present at all times during the execution of the work of this Section, with experience with the typer of materials being installed, the referenced standards, and who shall direct all work performed under this Section.

1.7 FIELD CONDITIONS

- A. Field Measurements: Verify field measurements before fabrication and indicate measurements on Shop Drawings.

1.8 WARRANTY

- A. Manufacturer's Special Warranty:
1. The structural integrity of the steel shall be warranted for twenty (20) years.
 2. Shade sails shall have a pro-rated warranty of ten (10) years against breakdown caused by UV light.
 3. When used in its designed capacity, the structure shall be guaranteed for five (5) years from original installation against:
 - a. Steel frame corrosion or deterioration under normal conditions.
 - b. Inappropriate design of supporting structure.

- c. Sails shall be warranted for winds & gusts up to a specified design. The fabric warranty is void if winds or gusts exceed such design.
- d. Excessive loss of fabric color under normal exposure conditions (i.e. sunlight, rot, & normal atmospheric chemicals).
- e. Wearing or wind blowouts caused by poor installation or design.
4. The sails should be removed before extreme wind conditions that exceed its design capacity.
5. The contractor may repair or replace any item covered by the warranty.
6. Shade structures located in areas where they may be damaged from other construction shall be protected and or removed from the locations until hazardous conditions cease.

PART 2 - PRODUCTS

2.1 MANUFACTURER

- A. Basis of Design fabricator/Installer: Shade Comforts, Inc., 77 Solano Square #238, Benicia, CA 94510
- B. Or equal

2.2 FABRIC

- C. High density polyethylene (HDPE) fabric shall be Alnet Extra Block shade cloth or approved equal
 1. Weighs 9.2-9.6 ounces per square yard for durability (ASTM D3776) color dependent
 - a. Fabric strength: Monofilament & tape construction
 - b. Tensile Strength (ASTM C 4595-86) color dependent: Warp: 1224-1156 lbf/ft.
Weft: 1632-1768 lbf/ft.
 - c. Tear Strength (ASTM D 1424) color dependent: Warp: 44 lbf; Weft: 44 lbf
 - d. Elongation at Break: (ASTM C 4595-86) color dependent: Warp: 66-68%; Weft: 58%
 - e. Burst Strength (ASTM 3786) color dependent: 784-828 lbf
 2. UV stabilized for protection
 - a. UV% blocked: 85-96% (color dependent) UV Protection Factor: up to 25 (color dependent)
 3. Shade Factor (visual light): 80-97% (color dependent)
 4. Stentored to maintain shape under tension and minimize sag
 5. Rachel-knitted to prevent unraveling if cut
 6. Temperature stability: -77 to 176 degrees F
 7. 10-year warranty
- D. Fire resistance approvals
 1. Flame Retardancy: California State Fire Marshal Section 13115 Registration
 2. NFPA 701-99 (Test Method 2)
 3. ASTM E-84

2.2 THREAD

- A. Shall be Gore Tenara high density; high strength and low shrinkage or equal
- B. Shall be abrasion resistant and immune to UV radiation
- C. Shall be unaffected by non-hydrocarbon-based cleaning agents, acid rain, mildew, rot, chlorine, saltwater, and industrial pollution

2.3 CARBON STRUCTURAL STEEL

- A. All fabricated steel shall conform to approved shop drawings and calculations.
- B. Square columns shall be HSS ASTM A500 Grade B (Fy=46 ksi). Steel plate shall be ASTM A36.

2.4 TENSIONING CABLE, CORNER DISCS & HARDWARE

- A. 7x19 steel cable shall conform to ASTM A-603. It shall not be field-cut.
- B. Cable diameter shall be determined by calculated engineering load
 - 1. 1/4" diameter for small-to-medium loads; 3/8" diameter for heavy loads
- C. Cable, cable connectors, & turnbuckles shall be hot dipped galvanized or T316 stain-less steel With Fy = 30,000 psi minimum.
- D. D-shackles shall be T316 stainless steel with Fy=30,000 psi minimum.
- E. Each shade sail corner shall have aluminum inserts for added strength and tension equalization.
- F. Each shade sail shall have a single, continuous cable. Cables shall not be terminated at each corner.
- G. Posts shall have welded chain links to facilitate erecting and removing shade sails.

2.5 ANCHOR BOLTS

- A. Anchor bolts set in new concrete shall be ASTM F1554, grade 36.
- B. All anchor bolts, nuts, & washers shall be hot dipped galvanized.

2.6 FOOTING REINFORCEMENT

- A. All reinforcement shall conform to ASTM A-615 grade 60.
- B. All reinforcing steel shall conform to approved shop drawings and calculations.

PART 3 - EXECUTION

3.1 WELDING

- A. All shop welds shall comply with the latest edition of the American Welding Society Specifications.
- B. Welding procedures shall comply with the AWS D1.1-AWS Structural Welding Code-Steel.
- C. All welds shall be performed by AWS- certified welders.
- D. All welds shall be continuous where length is not given, unless otherwise noted on drawings.
- E. All welds shall develop the full strength of the weaker member.
- F. All welds shall be made using E70xx electrodes.
- G. Shop connections shall be welded unless noted otherwise.
- H. All fillet welds shall be a minimum of 3/16" unless otherwise noted.
- I. All steel shall be welded shut at terminations to prevent leakage.
- J. Field-welded connections are not acceptable.
- K. Field connections shall be indicated on the drawings

3.2 CORROSION PROTECTION OF STEEL

- A. Non-galvanized structural carbon steel and welds shall be protected as follows:
 - 1. Degrease with mild alkaline cleaner at 140 degrees.
 - 2. Iron phosphate rinse to create a conversion layer on the steel & welds.
 - 3. Prebake in oven at 350-400 degrees to burn off additional contaminants.
 - 4. Apply 1.5 mm thick rust- inhibiting primer prior to applying the powder coat.
 - 5. Primer shall be epoxy polyester hybrid.
 - 6. Apply TGIC polyester, UV-inhibited weather resistant powder coat (minimum 2 mm thick).
- B. All columns to be factory-welded to be watertight.
- C. No field-drilling to permeate water barrier

3.3 SEWING

- A. On-site sewing of fabric will not be accepted.
- B. Corners shall be reinforced with extra non-tear material & strap
- C. Perimeters containing cables shall be double row lock stitched.

3.4 FOOTING CONSTRUCTION

- A. Footings shall conform to approved engineering specifications.
- B. Reinforcement fabricated & placed to latest ACI Detailing Manual & Manual of Standard Practice.
- C. Concrete work shall conform to latest edition of American Concrete Building Code ACI 318.
- D. Concrete specifications shall conform to approved engineering specifications.
- E. 28 Days Strength $F'_c = 4500$ psi
- F. Contractor shall not pour concrete when daily ambient temperature is below 55 degrees F.

3.5 STRUCTURE ERECTION

- A. Erect structures & hardware in compliance with fabricators' instructions.
- B. Securely fasten all parts to be attached.
- C. Ensure all parts interact freely & smoothly without binding.
- D. Install shade structure in a timely manner & coordinate with the work of other trades.

END OF SECTION 133100

SECTION 260519 - LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and 2018 Greenbook and City of San Diego “Whitebook”, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Copper building wire rated 600 V or less.
 - 2. Connectors, splices, and terminations rated 600 V and less.
- B. Related Requirements:
 - 1. Section 260523 "Control-Voltage Electrical Power Cables" for control systems communications cables and Classes 1, 2, and 3 control cables.

1.3 DEFINITIONS

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Product Schedule: Indicate type, use, location, and termination locations.

1.5 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For testing agency.
- B. Field quality-control reports.

1.6 QUALITY ASSURANCE

- A. Testing Agency Qualifications: Member company of NETA.
 - 1. Testing Agency's Field Supervisor: Certified by NETA to supervise on-site testing.

PART 2 - PRODUCTS

2.1 COPPER BUILDING WIRE

- A. Description: Flexible, insulated and uninsulated, drawn copper current-carrying conductor with an overall insulation layer or jacket, or both, rated 600 V or less.
- B. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - 1. Alpha Wire Company.
 - 2. Cerro Wire LLC.
 - 3. General Cable Technologies Corporation.
 - 4. Okonite Company (The).
 - 5. Southwire Company.
- C. Standards:
 - 1. Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and use.
 - 2. RoHS compliant.
 - 3. Conductor and Cable Marking: Comply with wire and cable marking according to UL's "Wire and Cable Marking and Application Guide."
- D. Deliver wire and cable to the site in their original unbroken packages, plainly marked or tagged with UL label, size and insulation type, and manufacturers name.
 - 1. Wire and cable manufactured 12 months or more prior to installation date will not be acceptable.
- E. Conductors: Copper, complying with ASTM B 3 for bare annealed copper and with ASTM B 8 for stranded conductors.
- F. Conductor Insulation:
 - 1. Type THWN-2: Comply with UL 83.
 - 2. Type XHHW-2: Comply with UL 44.

2.2 CONNECTORS AND SPLICES

- A. Description: Factory-fabricated connectors, splices, and lugs of size, ampacity rating, material, type, and class for application and service indicated; listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and use.
- B. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - 1. 3M Electrical Products.
 - 2. Ideal Industries, Inc.
 - 3. ILSCO.

4. O-Z/Gedney; a brand of Emerson Industrial Automation.
 5. Thomas & Betts Corporation; A Member of the ABB Group.
- C. Lugs: One piece, seamless, designed to terminate conductors specified in this Section.
1. Material: Copper.
 2. Type: One hole with standard barrels.
 3. Termination: Compression.

PART 3 - EXECUTION

3.1 CONDUCTOR MATERIAL APPLICATIONS

- A. Feeders: Copper; stranded for No. 10 AWG and smaller; stranded for No. 8 AWG and larger.
- B. Branch Circuits: Copper. Stranded for No. 10 AWG and smaller; stranded for No. 8 AWG and larger.

3.2 CONDUCTOR INSULATION AND MULTICONDUCTOR CABLE APPLICATIONS AND WIRING METHODS

- A. Exposed Feeders: Type THHN/THWN-2, single conductors in raceway .
- B. Feeders Concealed in Ceilings, Walls, Partitions, and Crawlspace: Type THHN/THWN-2, single conductors in raceway.
- C. Feeders Concealed in Concrete, below Slabs-on-Grade, and Underground: Type XHHW-2, single conductors in raceway.
- D. Exposed Branch Circuits, Including in Crawlspace: Type THHN/THWN-2, single conductors in raceway.
- E. Branch Circuits Concealed in Ceilings, Walls, and Partitions: Type THHN/THWN-2, single conductors in raceway.
- F. Branch Circuits Concealed in Concrete, below Slabs-on-Grade, and Underground: Type XHHW-2, single conductors in raceway.

3.3 INSTALLATION OF CONDUCTORS AND CABLES

- A. Complete raceway installation between conductor and cable termination points according to Section 260533 "Raceways and Boxes for Electrical Systems" prior to pulling conductors and cables.
- B. Use manufacturer-approved pulling compound or lubricant where necessary; compound used must not deteriorate conductor or insulation. Do not exceed manufacturer's recommended maximum pulling tensions and sidewall pressure values.

- C. Use pulling means, including fish tape, cable, rope, and basket-weave wire/cable grips that will not damage cables or raceway.
- D. Install exposed cable raceways parallel and perpendicular to surfaces of exposed structural members and follow surface contours where possible.
- E. Support cable raceways according to Section 260529 "Hangers and Supports for Electrical Systems."

3.4 CONNECTIONS

- A. Tighten electrical connectors and terminals according to manufacturer's published torque-tightening values. If manufacturer's torque values are not indicated, use those specified in UL 486A-486B.
- B. Make splices, terminations, and taps that are compatible with conductor material and that possess equivalent or better mechanical strength and insulation ratings than unspliced conductors.
- C. Wiring at Outlets: Install conductor at each outlet, with at least 12 inches of slack.

3.5 IDENTIFICATION

- A. Identify and color-code conductors and cables according to Section 260553 "Identification for Electrical Systems."
- B. Identify each spare conductor at each end with identity number and location of other end of conductor and identify as spare conductor.

3.6 FIRESTOPPING

- A. Apply firestopping to electrical penetrations of fire-rated floor and wall assemblies to restore original fire-resistance rating of assembly according to Section 078413 "Penetration Firestopping."

3.7 FIELD QUALITY CONTROL

- A. Testing Agency: Owner will engage a qualified testing agency to perform tests and inspections.
- B. Testing Agency: Engage a qualified testing agency to perform tests and inspections.
- C. Manufacturer's Field Service: Engage a factory-authorized service representative to test and inspect components, assemblies, and equipment installations, including connections.
- D. Perform tests and inspections.
 - 1. After installing conductors and cables and before electrical circuitry has been energized, test conductors for compliance with requirements.

2. Perform each of the following visual and electrical tests:
 - a. Inspect exposed sections of conductor and cable for physical damage and correct connection according to the single-line diagram.
 - b. Test bolted connections for high resistance using one of the following:
 - 1) A low-resistance ohmmeter.
 - 2) Calibrated torque wrench.
 - 3) Thermographic survey.
 - c. Inspect compression-applied connectors for correct cable match and indentation.
 - d. Inspect for correct identification.
 - e. Inspect cable jacket and condition.
 - f. Insulation-resistance test on each conductor for ground and adjacent conductors. Apply a potential of 500-V dc for 300-V rated cable for a one-minute duration.
 - g. Continuity test on each conductor and cable.
 - h. Uniform resistance of parallel conductors.
 3. Initial Infrared Scanning: After Substantial Completion, but before Final Acceptance, perform an infrared scan of each splice in conductors No. 3 AWG and larger. Remove box and equipment covers so splices are accessible to portable scanner. Correct deficiencies determined during the scan.
 - a. Instrument: Use an infrared scanning device designed to measure temperature or to detect significant deviations from normal values. Provide calibration record for device.
 - b. Record of Infrared Scanning: Prepare a certified report that identifies switches checked and that describes scanning results. Include notation of deficiencies detected, remedial action taken, and observations after remedial action.
- E. Cables will be considered defective if they do not pass tests and inspections.
- F. Prepare test and inspection reports to record the following:
1. Procedures used.
 2. Results that comply with requirements.
 3. Results that do not comply with requirements, and corrective action taken to achieve compliance with requirements.

END OF SECTION 260519

SECTION 260523 - CONTROL-VOLTAGE ELECTRICAL POWER CABLES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and 2018 Greenbook and City of San Diego “Whitebook”, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Low-voltage control cabling.
 - 2. Control-circuit conductors.
 - 3. Identification products.

1.3 DEFINITIONS

- A. EMI: Electromagnetic interference.
- B. Low Voltage: As defined in NFPA 70 for circuits and equipment operating at less than 50 V or for remote-control and signaling power-limited circuits.
- C. Plenum: A space forming part of the air distribution system to which one or more air ducts are connected. An air duct is a passageway, other than a plenum, for transporting air to or from heating, ventilating, or air-conditioning equipment.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product.

1.5 INFORMATIONAL SUBMITTALS

- A. Field quality-control reports.

1.6 QUALITY ASSURANCE

- A. Testing Agency Qualifications: Accredited by NETA.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- B. Flame Travel and Smoke Density for Cables in Non-Riser Applications and Non-Plenum Building Spaces: As determined by testing identical products according to UL 1685.
- C. RoHS compliant.
- D. Deliver wire and cable to the site in their original unbroken packages, plainly marked or tagged with UL label, size and insulation type, and manufacturers name.
 - 1. Wire and cable manufactured 12 months or more prior to installation date will not be acceptable.

2.2 LOW-VOLTAGE CONTROL CABLE

- A. Paired Cable: NFPA 70, Type CMG.
 - 1. Multi-pair, twisted, No. 16 AWG, stranded (19x29) tinned-copper conductors.
 - 2. PVC insulation.
 - 3. Unshielded.
 - 4. PVC jacket.
 - 5. Flame Resistance: Comply with UL 1685.

2.3 CONTROL-CIRCUIT CONDUCTORS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - 1. Encore Wire Corporation.
 - 2. General Cable; General Cable Corporation.
 - 3. Service Wire Co.
 - 4. Southwire Company.
- B. Class 1 Control Circuits: Stranded copper, Type THHN/THWN-2, complying with UL 83 in raceway.
- C. Class 2 Control Circuits: Stranded copper, Type THHN/THWN-2, complying with UL 83 in raceway.
- D. Class 3 Remote-Control and Signal Circuits: Stranded copper, Type THHN/THWN-2, complying with UL 83 in raceway.

2.4 SOURCE QUALITY CONTROL

- A. Testing Agency: Engage a qualified testing agency to evaluate cables.
- B. Cable will be considered defective if it does not pass tests and inspections.
- C. Prepare test and inspection reports.

PART 3 - EXECUTION

3.1 INSTALLATION OF RACEWAYS AND BOXES

- A. Comply with requirements in Section 260533 "Raceways and Boxes for Electrical Systems" for raceway selection and installation requirements for boxes, conduits, and wireways as supplemented or modified in this Section.
 - 1. Outlet boxes for cables shall be no smaller than 4 inches square by 2-1/8 inches deep with extension ring sized to bring edge of ring to within 1/8 inch of the finished wall surface.
 - 2. Flexible metal conduit shall not be used.
- B. Install manufactured conduit sweeps and long-radius elbows if possible.

3.2 INSTALLATION OF CONDUCTORS AND CABLES

- A. Comply with NECA 1.
- B. General Requirements for Cabling:
 - 1. All cables shall be installed in raceways or other structures that provide physical protection.
 - 2. Cables serving a common system may be grouped in a common raceway. Install network cabling and control wiring and cable in separate raceway from power wiring. Do not group conductors from different systems or different voltages.
 - 3. Do not install bruised, kinked, scored, deformed, or abraded cable. Remove and discard cable if damaged during installation and replace it with new cable.
 - 4. Provide strain relief.
 - 5. Keep runs short. Allow extra length for connecting to terminals. Do not bend cables in a radius less than 10 times the cable OD. Use sleeves or grommets to protect cables from vibration at points where they pass around sharp corners and through penetrations.
 - 6. Ground wire shall be copper, and grounding methods shall comply with IEEE C2. Demonstrate ground resistance.
- C. Installation of Control-Circuit Conductors:
 - 1. Install wiring in raceways.
 - 2. Use insulated spade lugs for wire and cable connection to screw terminals.
 - 3. Comply with requirements specified in Section 260533 "Raceways and Boxes for Electrical Systems."

3.3 REMOVAL OF CONDUCTORS AND CABLES

- A. Remove abandoned conductors and cables. Abandoned conductors and cables are those installed that are not terminated at equipment and are not identified with a tag for future use.

3.4 CONTROL-CIRCUIT CONDUCTORS

- A. Minimum Conductor Sizes:
 - 1. Class 1 remote-control and signal circuits; No 14 AWG.
 - 2. Class 2 low-energy, remote-control, and signal circuits; No. 16 AWG.
 - 3. Class 3 low-energy, remote-control, alarm, and signal circuits; No 12 AWG.

3.5 GROUNDING

- A. For low-voltage control wiring and cabling, comply with requirements in Section 260526 "Grounding and Bonding for Electrical Systems."

3.6 IDENTIFICATION

- A. Comply with requirements for identification specified in Section 260553 "Identification for Electrical Systems."
- B. Identify each wire on each end and at each terminal with a number-coded identification tag. Each wire shall have a unique tag.

3.7 FIELD QUALITY CONTROL

- A. Testing Agency: Engage a qualified testing agency to perform tests and inspections.
- B. Perform tests and inspections.
- C. Tests and Inspections:
 - 1. Visually inspect cable jacket materials for UL or third-party certification markings.
 - 2. Visually inspect cable placement, cable termination, grounding and bonding, equipment and patch cords, and labeling of all components.
 - 3. Test cabling for shorts, opens, intermittent faults, and polarity between conductors. Test cables after termination.
- D. End-to-end cabling will be considered defective if it does not pass tests and inspections.
- E. Prepare test and inspection reports.

END OF SECTION 260523

SECTION 260526 - GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and 2018 Greenbook and City of San Diego “Whitebook”, apply to this Section.

1.2 SUMMARY

- A. Section includes grounding and bonding systems and equipment.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Qualification Data: For testing agency and testing agency's field supervisor.
- C. Field quality-control reports.

1.4 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For grounding to include in emergency, operation, and maintenance manuals.

1.5 QUALITY ASSURANCE

- A. Testing Agency Qualifications: Certified by NETA.

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- B. Comply with UL 467 for grounding and bonding materials and equipment.

2.2 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - 1. Burndy; Part of Hubbell Electrical Systems.
 - 2. ERICO International Corporation.
 - 3. ILSCO.
 - 4. O-Z/Gedney; a brand of Emerson Industrial Automation.
 - 5. Thomas & Betts Corporation; A Member of the ABB Group.

2.3 CONDUCTORS

- A. Insulated Conductors: Copper wire or cable insulated for 600 V unless otherwise required by applicable Code or authorities having jurisdiction.
- B. Bare Copper Conductors:
 - 1. Solid Conductors: ASTM B 3.
 - 2. Stranded Conductors: ASTM B 8.
 - 3. Tinned Conductors: ASTM B 33.
 - 4. Bonding Conductor: No. 4 or No. 6 AWG, stranded conductor.
 - 5. Tinned Bonding Jumper: Tinned-copper tape, braided conductors terminated with copper ferrules; 1-5/8 inches wide and 1/16 inch thick.

2.4 CONNECTORS

- A. Listed and labeled by an NRTL acceptable to authorities having jurisdiction for applications in which used and for specific types, sizes, and combinations of conductors and other items connected.
- B. Welded Connectors: Exothermic-welding kits of types recommended by kit manufacturer for materials being joined and installation conditions.
- C. Bus-Bar Connectors: Compression type, copper or copper alloy for copper bus bar, with two wire terminals.
- D. Beam Clamps: Mechanical type, terminal, ground wire access from four directions, with dual, tin-plated or silicon bronze bolts.
- E. Cable-to-Cable Connectors: Compression type, copper or copper alloy.
- F. Conduit Hubs: Mechanical type, terminal with threaded hub.
- G. Lay-in Lug Connector: Mechanical type, copper rated for direct burial terminal with set screw.
- H. Straps: Solid copper, cast-bronze clamp. Rated for 600 A.
- I. U-Bolt Clamps: Mechanical type, copper or copper alloy, terminal listed for direct burial.

J. Water Pipe Clamps:

1. Mechanical type, two pieces with stainless-steel bolts.
 - a. Material: Die-cast zinc alloy.
 - b. Listed for direct burial.

PART 3 - EXECUTION

3.1 APPLICATIONS

- A. Conductors: Install stranded conductors for No. 10 AWG and smaller, and stranded conductors for No. 8 AWG and larger unless otherwise indicated.
- B. Conductor Terminations and Connections:
 1. Pipe and Equipment Grounding Conductor Terminations: Bolted connectors.
 2. Connections to Structural Steel: Welded connectors.

3.2 EQUIPMENT GROUNDING

- A. Install insulated equipment grounding conductors with all feeders and branch circuits.
- B. Metallic Fences: Comply with requirements of IEEE C2.
 1. Grounding Conductor: Bare copper, not less than No. 8 AWG.
 2. Gates: Shall be bonded to the grounding conductor with a flexible bonding jumper.

3.3 INSTALLATION

- A. Grounding Conductors: Route along shortest and straightest paths possible unless otherwise indicated or required by Code. Avoid obstructing access or placing conductors where they may be subjected to strain, impact, or damage.
 1. Use exothermic welds for all below-grade connections.
- B. Bonding Straps and Jumpers: Install in locations accessible for inspection and maintenance except where routed through short lengths of conduit.
 1. Bonding to Structure: Bond straps directly to basic structure, taking care not to penetrate any adjacent parts.
 2. Bonding to Equipment Mounted on Vibration Isolation Hangers and Supports: Install bonding so vibration is not transmitted to rigidly mounted equipment.
 3. Use exothermic-welded connectors for outdoor locations; if a disconnect-type connection is required, use a bolted clamp.
- C. Grounding and Bonding for Piping:
 1. Water Piping: Use braided-type bonding jumpers to electrically bypass water meters or dielectric fittings. Connect to pipe with a bolted connector.

- D. Connections: Make connections so possibility of galvanic action or electrolysis is minimized. Select connectors, connection hardware, conductors, and connection methods so metals in direct contact are galvanically compatible.
 - 1. Use electroplated or hot-tin-coated materials to ensure high conductivity and to make contact points closer in order of galvanic series.
 - 2. Make connections with clean, bare metal at points of contact.
 - 3. Make aluminum-to-steel connections with stainless-steel separators and mechanical clamps.
 - 4. Make aluminum-to-galvanized-steel connections with tin-plated copper jumpers and mechanical clamps.
 - 5. Coat and seal connections having dissimilar metals with inert material to prevent future penetration of moisture to contact surfaces.

3.4 FIELD QUALITY CONTROL

- A. Testing Agency: Engage a qualified testing agency to perform tests and inspections.
- B. Manufacturer's Field Service: Engage a factory-authorized service representative to test and inspect components, assemblies, and equipment installations, including connections.
- C. Perform tests and inspections.
- D. Tests and Inspections:
 - 1. After installing grounding system but before permanent electrical circuits have been energized, test for compliance with requirements.
 - 2. Inspect physical and mechanical condition. Verify tightness of accessible, bolted, electrical connections with a calibrated torque wrench according to manufacturer's written instructions.
 - 3. Test completed grounding system at each location where a maximum ground-resistance level is specified.
 - a. Measure ground resistance no fewer than two full days after last trace of precipitation and without soil being moistened by any means other than natural drainage or seepage and without chemical treatment or other artificial means of reducing natural ground resistance.
 - b. Perform tests by fall-of-potential method according to IEEE 81.
 - 4. Prepare dimensioned Drawings locating each test well, ground rod and ground-rod assembly, and other grounding electrodes. Identify each by letter in alphabetical order, and key to the record of tests and observations. Include the number of rods driven and their depth at each location and include observations of weather and other phenomena that may affect test results. Describe measures taken to improve test results.
- E. Grounding system will be considered defective if it does not pass tests and inspections.
- F. Prepare test and inspection reports.
- G. Report measured ground resistances that exceed the following values:

1. Power and Lighting Equipment or System with Capacity of 500 kVA and Less: 10 ohms.
- H. Excessive Ground Resistance: If resistance to ground exceeds specified values, notify Architect promptly and include recommendations to reduce ground resistance.

END OF SECTION 260526

SECTION 260529 - HANGERS AND SUPPORTS FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and 2018 Greenbook and City of San Diego “Whitebook”, apply to this Section.

1.2 SUMMARY

- A. Section Includes:

- 1. Steel slotted support systems.
 - 2. Nonmetallic slotted support systems.
 - 3. Conduit and cable support devices.
 - 4. Mounting, anchoring, and attachment components, including powder-actuated fasteners, mechanical expansion anchors, concrete inserts, clamps, through bolts, toggle bolts, and hanger rods.

- B. Related Requirements:

- 1. Section 260548.16 "Seismic Controls for Electrical Systems" for products and installation requirements necessary for compliance with seismic criteria.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.

- 1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for the following:
 - a. Slotted support systems, hardware, and accessories.
 - b. Clamps.
 - c. Hangers.
 - d. Sockets.
 - e. Eye nuts.
 - f. Fasteners.
 - g. Anchors.
 - h. Saddles.
 - i. Brackets.
 - 2. Include rated capacities and furnished specialties and accessories.

- B. Seismic Qualification Data: Certificates, for hangers and supports for electrical equipment and systems, accessories, and components, from manufacturer.

1. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculation.
2. Dimensioned Outline Drawings of Equipment Unit: Identify center of gravity and locate and describe mounting and anchorage provisions.
3. Detailed description of equipment anchorage devices on which the certification is based and their installation requirements.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Delegated Design: Engage a qualified professional engineer, as defined in Section 014000 "Quality Requirements," to design hanger and support system.
- B. Seismic Performance: Hangers and supports shall withstand the effects of earthquake motions determined according to ASCE/SEI 7.
 1. The term "withstand" means "the supported equipment and systems will remain in place without separation of any parts when subjected to the seismic forces specified and the supported equipment and systems will be fully operational after the seismic event."
 2. Component Importance Factor: 1.0.
- C. Surface-Burning Characteristics: Comply with ASTM E 84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
 1. Flame Rating: Class 1.
 2. Self-extinguishing according to ASTM D 635.

2.2 SUPPORT, ANCHORAGE, AND ATTACHMENT COMPONENTS

- A. Steel Slotted Support Systems: Preformed steel channels and angles with minimum 13/32-inch-diameter holes at a maximum of 8 inches o.c. in at least one surface.
 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. B-line, an Eaton business.
 - b. G-Strut.
 - c. Unistrut; Part of Atkore International.
 2. Standard: Comply with MFMA-4 factory-fabricated components for field assembly.
 3. Material for Channel, Fittings, and Accessories: Galvanized steel.
 4. Channel Width: Selected for applicable load criteria.
 5. Metallic Coatings: Hot-dip galvanized after fabrication and applied according to MFMA-4.

- B. Nonmetallic Slotted Support Systems: Structural-grade, factory-formed, glass-fiber-resin channels and angles with minimum 13/32-inch-diameter holes at a maximum of 8 inches o.c., in at least one surface.
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. Allied Tube & Conduit; a part of Atkore International.
 - b. B-line, an Eaton business.
 - c. G-Strut.
 2. Standard: Comply with MFMA-4 factory-fabricated components for field assembly.
 3. Channel Width: 1-5/8 inches.
 4. Fittings and Accessories: Products provided by channel and angle manufacturer and designed for use with those items.
 5. Fitting and Accessory Materials: Same as those for channels and angles, except metal items may be stainless steel.
 6. Rated Strength: Selected to suit applicable load criteria.
 7. Protect finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.
- C. Conduit and Cable Support Devices: Stainless-steel hangers, clamps, and associated fittings, designed for types and sizes of raceway or cable to be supported.
- D. Mounting, Anchoring, and Attachment Components: Items for fastening electrical items or their supports to building surfaces include the following:
1. Mechanical-Expansion Anchors: Insert-wedge-type, stainless steel, for use in hardened Portland cement concrete, with tension, shear, and pullout capacities appropriate for supported loads and building materials where used.
 - a. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1) B-line, an Eaton business.
 - 2) Hilti, Inc.
 - 3) ITW Ramset/Red Head; Illinois Tool Works, Inc.
 2. Concrete Inserts: Steel or malleable-iron, slotted support system units are similar to MSS Type 18 units and comply with MFMA-4 or MSS SP-58.
 3. Clamps for Attachment to Steel Structural Elements: MSS SP-58 units are suitable for attached structural element.
 4. Through Bolts: Structural type, hex head, and high strength. Comply with ASTM A 325.
 5. Toggle Bolts: Stainless-steel springhead type.
 6. Hanger Rods: Threaded steel.

PART 3 - EXECUTION

3.1 APPLICATION

- A. Comply with the following standards for application and installation requirements of hangers and supports, except where requirements on Drawings or in this Section are stricter:
 - 1. NECA 1.
 - 2. NECA 101
 - 3. NECA 102.
 - 4. NECA 105.
 - 5. NECA 111.
- B. Comply with requirements in Section 078413 "Penetration Firestopping" for firestopping materials and installation for penetrations through fire-rated walls, ceilings, and assemblies.
- C. Comply with requirements for raceways and boxes specified in Section 260533 "Raceways and Boxes for Electrical Systems."
- D. Maximum Support Spacing and Minimum Hanger Rod Size for Raceways: Space supports for EMT, IMC, and RMC as **required by** NFPA 70. Minimum rod size shall be 1/4 inch in diameter.
- E. Multiple Raceways or Cables: Install trapeze-type supports fabricated with steel slotted or other support system, sized so capacity can be increased by at least 25 percent in future without exceeding specified design load limits.
 - 1. Secure raceways and cables to these supports with two-bolt conduit clamps.

3.2 SUPPORT INSTALLATION

- A. Comply with NECA 1 and NECA 101 for installation requirements except as specified in this article.
- B. Raceway Support Methods: In addition to methods described in NECA 1.
- C. Strength of Support Assemblies: Where not indicated, select sizes of components so strength will be adequate to carry present and future static loads within specified loading limits. Minimum static design load used for strength determination shall be weight of supported components plus 200 lb.
- D. Mounting and Anchorage of Surface-Mounted Equipment and Components: Anchor and fasten electrical items and their supports to building structural elements by the following methods unless otherwise indicated by code:
 - 1. To Wood: Fasten with lag screws or through bolts.
 - 2. To New Concrete: Bolt to concrete inserts.
 - 3. To Masonry: Approved toggle-type bolts on hollow masonry units and expansion anchor fasteners on solid masonry units.
 - 4. To Existing Concrete: Expansion anchor fasteners.

5. Instead of expansion anchors, powder-actuated driven threaded studs provided with lock washers and nuts may be used in existing standard-weight concrete 4 inches thick or greater. Do not use for anchorage to lightweight-aggregate concrete or for slabs less than 4 inches thick.
 6. To Steel: Beam clamps (MSS SP-58, Type 19, 21, 23, 25, or 27), complying with MSS SP-69.
 7. To Light Steel: Sheet metal screws.
 8. Items Mounted on Hollow Walls and Nonstructural Building Surfaces: Mount cabinets, panelboards, disconnect switches, control enclosures, pull and junction boxes, transformers, and other devices on slotted-channel racks attached to substrate by means that comply with seismic-restraint strength and anchorage requirements.
- E. Drill holes for expansion anchors in concrete at locations and to depths that avoid the need for reinforcing bars.

3.3 PAINTING

- A. Touchup: Clean field welds and abraded areas of shop paint. Paint exposed areas immediately after erecting hangers and supports. Use same materials as used for shop painting. Comply with SSPC-PA 1 requirements for touching up field-painted surfaces.
 1. Apply paint by brush or spray to provide minimum dry film thickness of 2.0 mils.
- B. Touchup: Comply with requirements in Section 099123 "Interior Painting" for cleaning and touchup painting of field welds, bolted connections, and abraded areas of shop paint on miscellaneous metal.
- C. Galvanized Surfaces: Clean welds, bolted connections, and abraded areas and apply galvanizing-repair paint to comply with ASTM A 780.

END OF SECTION 260529

SECTION 260533 - RACEWAYS AND BOXES FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and 2018 Greenbook and City of San Diego “Whitebook”, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Metal conduits and fittings.
 - 2. Nonmetallic conduits and fittings.
 - 3. Metal wireways and auxiliary gutters.
 - 4. Nonmetal wireways and auxiliary gutters.
 - 5. Boxes, enclosures, and cabinets.
- B. Related Requirements:
 - 1. Section 260543 "Underground Ducts and Raceways for Electrical Systems" for exterior ductbanks and underground utility construction.

1.3 DEFINITIONS

- A. GRC: Galvanized rigid steel conduit.
- B. IMC: Intermediate metal conduit.

1.4 ACTION SUBMITTALS

- A. Product Data: For raceways, wireways and fittings, hinged-cover enclosures, and cabinets.

1.5 INFORMATIONAL SUBMITTALS

- A. Source quality-control reports.

PART 2 - PRODUCTS

2.1 METAL CONDUITS AND FITTINGS

- A. Metal Conduit:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. Allied Tube & Conduit; a part of Atkore International.
 - b. NEC, Inc.
 - c. O-Z/Gedney; a brand of Emerson Industrial Automation.
 - d. Republic Conduit.
 - e. Thomas & Betts Corporation; A Member of the ABB Group.
 - f. Western Tube and Conduit Corporation.
 - g. Wheatland Tube Company.
2. Listing and Labeling: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
3. GRC: Comply with ANSI C80.1 and UL 6.
4. IMC: Comply with ANSI C80.6 and UL 1242.
5. PVC-Coated Steel Conduit: PVC-coated rigid steel conduit.
 - a. Comply with NEMA RN 1.
 - b. Coating Thickness: 0.040 inch, minimum.
6. EMT: Comply with ANSI C80.3 and UL 797.
7. FMC: Comply with UL 1; zinc-coated steel or stainless steel.
8. LFMC: Flexible steel conduit with PVC jacket and complying with UL 360.

B. Metal Fittings:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. Allied Tube & Conduit; a part of Atkore International.
 - b. O-Z/Gedney; a brand of Emerson Industrial Automation.
 - c. Republic Conduit.
 - d. Thomas & Betts Corporation; A Member of the ABB Group.
 - e. Western Tube and Conduit Corporation.
 - f. Wheatland Tube Company.
2. Comply with NEMA FB 1 and UL 514B.
3. Listing and Labeling: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
4. Fittings, General: Listed and labeled for type of conduit, location, and use.
5. Conduit Fittings for Hazardous (Classified) Locations: Comply with UL 1203 and NFPA 70.
6. Fittings for GRC and IMC: threaded type.
7. Fittings for EMT:
 - a. Material: Steel.
 - b. Type: compression.

8. Expansion Fittings: PVC or steel to match conduit type, complying with UL 651, rated for environmental conditions where installed, and including flexible external bonding jumper.
 9. Coating for Fittings for PVC-Coated Conduit: Minimum thickness of 0.040 inch, with overlapping sleeves protecting threaded joints.
- C. Joint Compound for IMC or GRC: Approved, as defined in NFPA 70, by authorities having jurisdiction for use in conduit assemblies, and compounded for use to lubricate and protect threaded conduit joints from corrosion and to enhance their conductivity.

2.2 NONMETALLIC CONDUITS AND FITTINGS

A. Nonmetallic Conduit:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. Arnco Corporation.
 - b. CANTEX INC.
 - c. Thomas & Betts Corporation; A Member of the ABB Group.
2. Listing and Labeling: Nonmetallic conduit shall be listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
3. RNC: Type EPC-80-PVC, complying with NEMA TC 2 and UL 651 unless otherwise indicated.

B. Nonmetallic Fittings:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. Arnco Corporation.
 - b. CANTEX INC.
 - c. Thomas & Betts Corporation; A Member of the ABB Group.
2. Fittings, General: Listed and labeled for type of conduit, location, and use.
3. Fittings for RNC: Comply with NEMA TC 3; match to conduit or tubing type and material.

2.3 METAL WIREWAYS AND AUXILIARY GUTTERS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
1. B-line, an Eaton business.
 2. Hoffman; a brand of Pentair Equipment Protection.
 3. MonoSystems, Inc.
 4. Square D.

- B. Description: Sheet metal, complying with UL 870 and NEMA 250, Type 4 unless otherwise indicated, and sized according to NFPA 70.
 - 1. Metal wireways installed outdoors shall be listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- C. Fittings and Accessories: Include covers, couplings, offsets, elbows, expansion joints, adapters, hold-down straps, end caps, and other fittings to match and mate with wireways as required for complete system.
- D. Wireway Covers: Screw-cover type unless otherwise indicated.
- E. Finish: Manufacturer's standard enamel finish.

2.4 NONMETALLIC WIREWAYS AND AUXILIARY GUTTERS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - 1. Allied Moulded Products, Inc.
 - 2. Hoffman; a brand of Pentair Equipment Protection.
 - 3. Lamson & Sessions.
 - 4. Niedax Inc.
- B. Listing and Labeling: Nonmetallic wireways and auxiliary gutters shall be listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- C. Description: Fiberglass polyester, extruded and fabricated to required size and shape, without holes or knockouts. Cover shall be gasketed with oil-resistant gasket material and fastened with captive screws treated for corrosion resistance. Connections shall be flanged and have stainless-steel screws and oil-resistant gaskets.
- D. Fittings and Accessories: Couplings, offsets, elbows, expansion joints, adapters, hold-down straps, end caps, and other fittings shall match and mate with wireways as required for complete system.
- E. Solvents and Adhesives: As recommended by conduit manufacturer.

2.5 BOXES, ENCLOSURES, AND CABINETS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - 1. Adalet.
 - 2. Crouse-Hinds, an Eaton business.
 - 3. EGS/Appleton Electric.
 - 4. Hoffman; a brand of Pentair Equipment Protection.
 - 5. Milbank Manufacturing Co.
 - 6. O-Z/Gedney; a brand of Emerson Industrial Automation.

7. RACO; Hubbell.
 8. Thomas & Betts Corporation; A Member of the ABB Group.
- B. General Requirements for Boxes, Enclosures, and Cabinets: Boxes, enclosures, and cabinets installed in wet locations shall be listed for use in wet locations.
 - C. Sheet Metal Outlet and Device Boxes: Comply with NEMA OS 1 and UL 514A.
 - D. Cast-Metal Outlet and Device Boxes: Comply with NEMA FB 1, ferrous alloy, Type FD, with gasketed cover.
 - E. Nonmetallic Outlet and Device Boxes: Comply with NEMA OS 2 and UL 514C.
 - F. Small Sheet Metal Pull and Junction Boxes: NEMA OS 1.
 - G. Box extensions used to accommodate new building finishes shall be of same material as recessed box.
 - H. Device Box Dimensions: 4 inches square by 2-1/8 inches deep.
 - I. Gangable boxes are prohibited.
 - J. Hinged-Cover Enclosures: Comply with UL 50 and NEMA 250, Type 4 with continuous-hinge cover with flush latch unless otherwise indicated.
 1. Metal Enclosures: Steel, finished inside and out with manufacturer's standard enamel.
 2. Nonmetallic Enclosures: Fiberglass.
 3. Interior Panels: Steel; all sides finished with manufacturer's standard enamel.
 - K. Cabinets:
 1. NEMA 250, Type 12 galvanized-steel box with removable interior panel and removable front, finished inside and out with manufacturer's standard enamel.
 2. Hinged door in front cover with flush latch and concealed hinge.
 3. Key latch to match panelboards.
 4. Metal barriers to separate wiring of different systems and voltage.
 5. Accessory feet where required for freestanding equipment.
 6. Nonmetallic cabinets shall be listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

PART 3 - EXECUTION

3.1 RACEWAY APPLICATION

- A. Outdoors: Apply raceway products as specified below unless otherwise indicated:
 1. Exposed Conduit: GRC.
 2. Boxes and Enclosures, Aboveground: NEMA 250, Type 4.
- B. Indoors: Apply raceway products as specified below unless otherwise indicated:

1. Exposed, Not Subject to Physical Damage: EMT.
 2. Exposed, Subject to Physical Damage, not damp or wet: GRC.
 3. Connection to Vibrating Equipment (Including Transformers and Hydraulic, Pneumatic, Electric Solenoid, or Motor-Driven Equipment): LFMC.
 4. Damp or Wet Locations: RNC. Raceway locations include the following:
 - a. Pump room.
 5. Boxes and Enclosures: NEMA 250, Type 1, except use NEMA 250, Type 4 nonmetallic in damp or wet locations.
- C. Minimum Raceway Size: 3/4-inch trade size.
- D. Raceway Fittings: Compatible with raceways and suitable for use and location.
1. Rigid and Intermediate Steel Conduit: Use threaded rigid steel conduit fittings unless otherwise indicated. Comply with NEMA FB 2.10.
 2. PVC Externally Coated, Rigid Steel Conduits: Use only fittings listed for use with this type of conduit. Patch and seal all joints, nicks, and scrapes in PVC coating after installing conduits and fittings. Use sealant recommended by fitting manufacturer and apply in thickness and number of coats recommended by manufacturer.
 3. EMT: Use compression, steel fittings. Comply with NEMA FB 2.10.
 4. Flexible Conduit: Use only fittings listed for use with flexible conduit. Comply with NEMA FB 2.20.
- E. Do not install aluminum conduits, boxes, or fittings.
- F. Do not install nonmetallic conduit where ambient temperature exceeds 120 deg F.

3.2 INSTALLATION

- A. Comply with requirements in Section 260529 "Hangers and Supports for Electrical Systems" for hangers and supports.
- B. Comply with NECA 1 and NECA 101 for installation requirements except where requirements on Drawings or in this article are stricter. Comply with NECA 102 for aluminum conduits. Comply with NFPA 70 limitations for types of raceways allowed in specific occupancies and number of floors.
- C. Do not install raceways or electrical items on any rotating equipment.
- D. Do not fasten conduits onto the bottom side of a metal deck roof.
- E. Keep raceways at least 6 inches away from parallel runs of flues and steam or hot-water pipes. Install horizontal raceway runs above water and steam piping.
- F. Complete raceway installation before starting conductor installation.
- G. Arrange stub-ups so curved portions of bends are not visible above finished slab.

- H. Install no more than the equivalent of three 90-degree bends in any conduit run except for control wiring conduits, for which fewer bends are allowed. Support within 12 inches of changes in direction.
- I. Make bends in raceway using large-radius preformed ells. Field bending shall be according to NFPA 70 minimum radii requirements. Use only equipment specifically designed for material and size involved.
- J. Conceal conduit within walls and ceilings in finished areas unless otherwise indicated. Install conduits parallel or perpendicular to building lines.
- K. Support conduit within 12 inches of enclosures to which attached.
- L. Threaded Conduit Joints, Exposed to Wet, Damp, Corrosive, or Outdoor Conditions: Apply listed compound to threads of raceway and fittings before making up joints. Follow compound manufacturer's written instructions.
- M. Coat field-cut threads on PVC-coated raceway with a corrosion-preventing conductive compound prior to assembly.
- N. Raceway Terminations at Locations Subject to Moisture or Vibration: Use insulating bushings to protect conductors including conductors smaller than No. 4 AWG.
- O. Terminate threaded conduits into threaded hubs or with locknuts on inside and outside of boxes or cabinets. Install bushings on conduits up to 1-1/4-inch trade size and insulated throat metal bushings on 1-1/2-inch trade size and larger conduits terminated with locknuts. Install insulated throat metal grounding bushings on service conduits.
- P. Install raceways square to the enclosure and terminate at enclosures with locknuts. Install locknuts hand tight plus 1/4 turn more.
- Q. Do not rely on locknuts to penetrate nonconductive coatings on enclosures. Remove coatings in the locknut area prior to assembling conduit to enclosure to assure a continuous ground path.
- R. Cut conduit perpendicular to the length. For conduits 2-inch trade size and larger, use roll cutter or a guide to make cut straight and perpendicular to the length.
- S. Install pull wires in empty raceways. Use polypropylene or monofilament plastic line with not less than 200-lb tensile strength. Leave at least 12 inches of slack at each end of pull wire. Cap underground raceways designated as spare above grade alongside raceways in use.
- T. Install raceway sealing fittings at accessible locations according to NFPA 70 and fill them with listed sealing compound. For concealed raceways, install each fitting in a flush steel box with a blank cover plate having a finish similar to that of adjacent plates or surfaces. Install raceway sealing fittings according to NFPA 70.
- U. Install devices to seal raceway interiors at accessible locations. Locate seals so no fittings or boxes are between the seal and the following changes of environments. Seal the interior of all raceways at the following points:

1. Where conduits pass from warm to cold locations, such as boundaries of refrigerated spaces.
 2. Where an underground service raceway enters a building or structure.
 3. Conduit extending from interior to exterior of building.
 4. Conduit extending into pressurized duct and equipment.
 5. Conduit extending into pressurized zones that are automatically controlled to maintain different pressure set points.
 6. Where otherwise required by NFPA 70.
- V. Comply with manufacturer's written instructions for solvent welding RNC and fittings.
- W. Expansion-Joint Fittings:
1. Install in each run of aboveground RNC that is located where environmental temperature change may exceed 30 deg F and that has straight-run length that exceeds 25 feet. Install in each run of aboveground RMC conduit that is located where environmental temperature change may exceed 100 deg F and that has straight-run length that exceeds 100 feet.
 2. Install type and quantity of fittings that accommodate temperature change listed for each of the following locations:
 - a. Outdoor Locations Not Exposed to Direct Sunlight: 125 deg F temperature change.
 - b. Outdoor Locations Exposed to Direct Sunlight: 155 deg F temperature change.
 3. Install fitting(s) that provide expansion and contraction for at least 0.00041 inch per foot of length of straight run per deg F of temperature change for PVC conduits. Install fitting(s) that provide expansion and contraction for at least 0.000078 inch per foot of length of straight run per deg F of temperature change for metal conduits.
 4. Install expansion fittings at all locations where conduits cross building or structure expansion joints.
 5. Install each expansion-joint fitting with position, mounting, and piston setting selected according to manufacturer's written instructions for conditions at specific location at time of installation. Install conduit supports to allow for expansion movement.
- X. Flexible Conduit Connections: Comply with NEMA RV 3. Use a maximum of 36 inches of flexible conduit for equipment subject to vibration, noise transmission, or movement; and for transformers and motors.
1. Use LFMC in damp or wet locations subject to severe physical damage.
 2. Use LFMC in damp or wet locations not subject to severe physical damage.
- Y. Mount boxes at heights indicated on Drawings. If mounting heights of boxes are not individually indicated, give priority to ADA requirements. Install boxes with height measured to center of box unless otherwise indicated.
- Z. Locate boxes so that cover or plate will not span different building finishes.
- AA. Fasten junction and pull boxes to or support from building structure. Do not support boxes by conduits.

3.3 SLEEVE AND SLEEVE-SEAL INSTALLATION FOR ELECTRICAL PENETRATIONS

- A. Install sleeves and sleeve seals at penetrations of exterior floor and wall assemblies. Comply with requirements in Section 260544 "Sleeves and Sleeve Seals for Electrical Raceways and Cabling."

3.4 PROTECTION

- A. Protect coatings, finishes, and cabinets from damage and deterioration.
 - 1. Repair damage to galvanized finishes with zinc-rich paint recommended by manufacturer.
 - 2. Repair damage to PVC coatings or paint finishes with matching touchup coating recommended by manufacturer.

END OF SECTION 260533

SECTION 260543 - UNDERGROUND DUCTS AND RACEWAYS FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and 2018 Greenbook and City of San Diego “Whitebook”, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Rigid nonmetallic duct.
 - 2. Duct accessories.
 - 3. Precast concrete handholes.
 - 4. Polymer concrete handholes and boxes with polymer concrete cover.
 - 5. Utility structure accessories.

1.3 DEFINITIONS

- A. Direct Buried: Duct or a duct bank that is buried in the ground, without any additional casing materials such as concrete.
- B. Duct: A single duct or multiple ducts. Duct may be either installed singly or as component of a duct bank.
- C. Duct Bank:
 - 1. Two or more ducts installed in parallel, with or without additional casing materials.
 - 2. Multiple duct banks.
- D. GRC: Galvanized rigid (steel) conduit.
- E. Trafficways: Locations where vehicular or pedestrian traffic is a normal course of events.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Include duct-bank materials, including spacers and miscellaneous components.
 - 2. Include duct, conduits, and their accessories, including elbows, end bells, bends, fittings, and solvent cement.
 - 3. Include handholes, boxes, and other utility structures.
 - 4. Include underground-line warning tape.
- B. Sustainable Design Submittals:

1. Product Data: For adhesives and sealants, indicating VOC content.

1.5 INFORMATIONAL SUBMITTALS

- A. Field quality-control reports.

1.6 QUALITY ASSURANCE

- A. Testing Agency Qualifications: Qualified according to ASTM E329 for testing indicated.

1.7 FIELD CONDITIONS

- A. Interruption of Existing Electrical Service: Do not interrupt electrical service to facilities occupied by Owner or others unless permitted under the following conditions, and then only after arranging to provide temporary electrical service according to requirements indicated:
 1. Notify City Representative no fewer than seven days in advance of proposed interruption of electrical service.
 2. Do not proceed with interruption of electrical service without City Representative's written permission.
- B. Ground Water: Assume ground-water level is 24 inches below ground surface unless a higher water table is noted on Drawings.

PART 2 - PRODUCTS

2.1 RIGID NONMETALLIC DUCT

- A. Underground Plastic Utilities Duct: Type EPC-80-PVC and Type EPC-40-PVC RNC, complying with NEMA TC 2 and UL 651, with matching fittings complying with NEMA TC 3 by same manufacturer as duct.
- B. Manufacturers: Subject to compliance with requirements, **[available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following]**:
 1. ARNCO Corp.
 2. CANTEX INC.
 3. CertainTeed Corporation.
 4. Condux International, Inc.
- C. Listed and labeled as defined in NFPA 70, by a nationally recognized testing laboratory, and marked for intended location and application.
- D. Solvents and Adhesives: As recommended by conduit manufacturer.
 1. VOC Content: 510 g/L or less for PVC conduit and fittings.

2.2 DUCT ACCESSORIES

- A. Duct Spacers: Factory-fabricated, rigid, PVC interlocking spacers; sized for type and size of duct with which used, and selected to provide minimum duct spacing indicated while supporting duct during concreting or backfilling.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Allied Tube & Conduit; a part of Atkore International.
 - b. CANTEX INC.
 - c. Carlon; a brand of Thomas & Betts Corporation.
 - d. PenCell Plastics.
 - e. Underground Devices, Inc.
- B. Underground-Line Warning Tape: Comply with requirements for underground-line warning tape specified in Section 260553 "Identification for Electrical Systems."

2.3 PRECAST CONCRETE HANDHOLES AND BOXES

- A. Description: Factory-fabricated, reinforced-concrete, monolithically poured walls and bottom unless open-bottom enclosures are indicated. Frame and cover shall form top of enclosure and shall have load rating consistent with that of handhole or box.
- B. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Newbasis.
 - 2. Christy Concrete Products.
 - 3. Oldcastle Precast, Inc.
 - 4. Utility Vault Co.
- C. Comply with ASTM C858 for design and manufacturing processes.
- D. Frame and Cover: Non-metallic polymer concrete or concrete, with tamper-resistant, captive, stainless steel cover-securing bolts.
- E. Cover Finish: Nonskid finish shall have a minimum coefficient of friction of 0.50.
- F. Cover Legend: Molded lettering, "ELECTRIC."
- G. Configuration: Units shall be designed for flush burial and have open bottom unless otherwise indicated.
- H. Extensions: Designed to mate with bottom of enclosure. Same material as enclosure.
 - 1. Extension shall provide increased depth of 12 inches.

- I. Joint Sealant: Asphaltic-butyl material with adhesion, cohesion, flexibility, and durability properties necessary to withstand maximum hydrostatic pressures at the installation location with the ground-water level at grade.
- J. Knockout Panels: Precast openings in walls, arranged to match dimensions and elevations of approaching duct, plus an additional 12 inches vertically and horizontally to accommodate alignment variations.
 - 1. Center window location.
 - 2. Knockout panels shall be located no less than 6 inches from interior surfaces of walls, floors, or frames and covers of handholes, but close enough to corners to facilitate racking of cables on walls.
 - 3. Knockout panel opening shall have cast-in-place, welded-wire fabric reinforcement for field cutting and bending to tie in to concrete envelopes of duct.
 - 4. Knockout panels shall be framed with at least two additional No. 3 steel reinforcing bars in concrete around each opening.
 - 5. Knockout panels shall be 1-1/2 to 2 inches thick.
- K. Handholes 12 inches wide by 24 inches long and larger shall have inserts for cable racks and pulling-in irons installed before concrete is poured.

2.4 UTILITY STRUCTURE ACCESSORIES

- A. Duct-Sealing Compound: Nonhardening, safe for contact with human skin, not deleterious to cable insulation, and workable at temperatures as low as 35 deg F. Capable of withstanding temperature of 300 deg F without slump and adhering to clean surfaces of plastic ducts, metallic conduit, conduit and duct coatings, concrete, masonry, lead, cable sheaths, cable jackets, insulation materials, and common metals.

2.5 SOURCE QUALITY CONTROL

- A. Test and inspect precast concrete utility structures according to ASTM C1037.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Coordinate layout and installation of duct, duct bank, handholes, and boxes with final arrangement of other utilities, site grading, and surface features as determined in the field. Notify Architect if there is a conflict between areas of excavation and existing structures or archaeological sites to remain.
- B. Coordinate elevations of duct and duct-bank entrances into handholes and boxes with final locations and profiles of duct and duct banks, as determined by coordination with other utilities, underground obstructions, and surface features. Revise locations and elevations as required to suit field conditions and to ensure that duct and duct bank will drain to manholes and handholes, and as approved by Architect.

3.2 UNDERGROUND DUCT APPLICATION

- A. Duct for Electrical Feeders 600 V and Less: Type EPC-40-PVC RNC, direct-buried unless otherwise indicated.
- B. Duct for Electrical Branch Circuits: Type EPC-40-PVC RNC, direct-buried unless otherwise indicated.
- C. Stub-ups: Concrete-encased RNC.

3.3 UNDERGROUND ENCLOSURE APPLICATION

- A. Handholes and Boxes for 600 V and Less:
 - 1. Units in Sidewalk and Similar Applications with a Safety Factor for Nondeliberate Loading by Vehicles: Precast concrete, AASHTO HB 17, H-10 structural load rating.
 - 2. Cover design load shall not exceed the design load of the handhole or box.

3.4 EARTHWORK

- A. Excavation and Backfill: Comply with City of San Diego "White Book" but do not use heavy-duty, hydraulic-operated, compaction equipment.
- B. Restore surface features at areas disturbed by excavation and re-establish original grades unless otherwise indicated. Replace removed sod immediately after backfilling is completed.
- C. Cut and patch existing pavement in the path of underground duct, duct bank, and underground structures according to "Cutting and Patching" Article in Section 017300 "Execution."

3.5 DUCT AND DUCT-BANK INSTALLATION

- A. Where indicated on Drawings, install duct, spacers, and accessories into the duct-bank configuration shown. Duct installation requirements in this Section also apply to duct bank.
- B. Install duct according to NEMA TCB 2.
- C. Slope: Pitch duct a minimum slope of 1:300 down toward manholes and handholes and away from buildings and equipment. Slope duct from a high point between two manholes, to drain in both directions.
- D. Curves and Bends: Use 5-degree angle couplings for small changes in direction. Use manufactured long sweep bends with a minimum radius of 48 inches, both horizontally and vertically, at other locations unless otherwise indicated.
 - 1. Duct shall have maximum of two 90 degree bends or the total of all bends shall be no more 180 degrees between pull points.
- E. Joints: Use solvent-cemented joints in duct and fittings and make watertight according to manufacturer's written instructions. Stagger couplings so those of adjacent duct do not lie in same plane.

- F. Building Wall Penetrations: Make a transition from underground duct to GRC at least five feet outside the building wall, without reducing duct line slope away from the building and without forming a trap in the line. Use fittings manufactured for RNC-to-GRC transition. Install GRC penetrations of building walls as specified in Section 260544 "Sleeves and Sleeve Seals for Electrical Raceways and Cabling."
- G. Sealing: Provide temporary closure at terminations of duct with pulled cables. Seal spare duct at terminations. Use sealing compound and plugs to withstand at least 15-psig hydrostatic pressure.
- H. Pulling Cord: Install 200-lbf-test nylon cord in empty ducts.
- I. Direct-Buried Duct and Duct Bank:
 - 1. Excavate trench bottom to provide firm and uniform support for duct. Comply with City of San Diego "White Book" requirements for preparation of trench bottoms for pipes less than 6 inches in nominal diameter.
 - 2. Width: Excavate trench 3 inches wider than duct on each side.
 - 3. Depth: Install top of duct at least 24 inches below finished grade unless otherwise indicated.
 - 4. Install duct with a minimum of 3 inches between ducts for like services and 6 inches between power and communications duct.
 - 5. Elbows: Install manufactured duct elbows for stub-ups, at building entrances, and at changes of direction in duct direction unless otherwise indicated. Encase elbows for stub-up ducts throughout length of elbow.
 - 6. Install manufactured GRC elbows for stub-ups, at building entrances, and at changes of direction in duct.
 - a. Couple RNC duct to GRC with adapters designed for this purpose and encase coupling with 3 inches of concrete.
 - b. Stub-ups to Outdoor Equipment: Extend concrete-encased GRC horizontally a minimum of 60 inches from edge of base. Install insulated grounding bushings on terminations at equipment.
 - 7. After installing duct, backfill to 4 inches over duct and hand tamp. Start at tie-in point and work toward end of duct run, leaving ducts at end of run free to move with expansion and contraction as temperature changes during this process. Firmly tamp backfill around ducts to provide maximum supporting strength. Use hand tamper only. After placing controlled backfill over final tier, make final duct connections at end of run and complete backfilling with normal compaction. Comply with requirements in Section 312000 "Earth Moving" for installation of backfill materials.
 - a. Place minimum 3 inches of sand as a bed for duct. Place sand to a minimum of 6 inches above top level of duct.
- J. Underground-Line Warning Tape: Bury conducting underground line specified in Section 260553 "Identification for Electrical Systems" no less than 12 inches above all ducts and duct banks and approximately 12 inches below grade. Align tape parallel to and within 3 inches of centerline of duct bank.

3.6 INSTALLATION OF CONCRETE HANDHOLES AND BOXES

A. Precast Concrete Handhole Installation:

1. Comply with ASTM C891 unless otherwise indicated.
2. Install units level and plumb and with orientation and depth coordinated with connecting duct, to minimize bends and deflections required for proper entrances.
3. Unless otherwise indicated, support units on a level bed of crushed stone or gravel, graded from 1-inch sieve to No. 4 sieve and compacted to same density as adjacent undisturbed earth.

B. Elevations:

1. Handhole Covers: In paved areas and trafficways, set surface flush with finished grade. Set covers of other handholes 1 inch above finished grade.

C. Drainage: Install drains in bottom of manholes where indicated. Coordinate with drainage provisions indicated.

3.7 GROUNDING

A. Ground underground ducts and utility structures according to Section 260526 "Grounding and Bonding for Electrical Systems."

3.8 FIELD QUALITY CONTROL

A. Perform the following tests and inspections:

1. Demonstrate capability and compliance with requirements on completion of installation of underground duct, duct bank, and utility structures.
2. Pull solid aluminum or wood test mandrel through duct to prove joint integrity and adequate bend radii, and test for out-of-round duct. Provide a minimum 12-inch-long mandrel equal to duct size minus 1/4 inch. If obstructions are indicated, remove obstructions and retest.
3. Test handhole grounding to ensure electrical continuity of grounding and bonding connections. Measure and report ground resistance as specified in Section 260526 "Grounding and Bonding for Electrical Systems."

B. Correct deficiencies and retest as specified above to demonstrate compliance.

C. Prepare test and inspection reports.

3.9 CLEANING

A. Pull leather-washer-type duct cleaner, with graduated washer sizes, through full length of duct until duct cleaner indicates that duct is clear of dirt and debris. Follow with rubber duct swab for final cleaning and to assist in spreading lubricant throughout ducts.

END OF SECTION 260543

SECTION 260544 - SLEEVES AND SLEEVE SEALS FOR ELECTRICAL RACEWAYS AND CABLING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and 2018 Greenbook and City of San Diego “Whitebook”, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Sleeves for raceway and cable penetration of non-fire-rated construction walls and floors.
 - 2. Grout.
 - 3. Silicone sealants.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.

PART 2 - PRODUCTS

2.1 SLEEVES

- A. Sleeves for Conduits Penetrating Non-Fire-Rated Gypsum Board Assemblies: Galvanized-steel sheet; 0.0239-inch minimum thickness; round tube closed with welded longitudinal joint, with tabs for screw-fastening the sleeve to the board.

2.2 GROUT

- A. Description: Nonshrink; recommended for interior and exterior sealing openings in non-fire-rated walls or floors.
- B. Standard: ASTM C 1107/C 1107M, Grade B, post-hardening and volume-adjusting, dry, hydraulic-cement grout.
- C. Design Mix: 5000-psi, 28-day compressive strength.
- D. Packaging: Premixed and factory packaged.

2.3 SILICONE SEALANTS

- A. Silicone Sealants: Single-component, silicone-based, neutral-curing elastomeric sealants of grade indicated below.
 - 1. Grade: Pourable (self-leveling) formulation for openings in floors and other horizontal surfaces that are not fire rated.
- B. Silicone Foams: Multicomponent, silicone-based liquid elastomers that, when mixed, expand and cure in place to produce a flexible, nonshrinking foam.

PART 3 - EXECUTION

3.1 SLEEVE INSTALLATION FOR NON-FIRE-RATED ELECTRICAL PENETRATIONS

- A. Comply with NECA 1.
- B. Comply with NEMA VE 2 for cable tray and cable penetrations.
- C. Sleeves for Conduits Penetrating Above-Grade Non-Fire-Rated Concrete and Masonry-Unit Floors and Walls:
 - 1. Interior Penetrations of Non-Fire-Rated Walls and Floors:
 - a. Seal annular space between sleeve and raceway or cable, using joint sealant appropriate for size, depth, and location of joint. Comply with requirements in Section 079200 "Joint Sealants."
 - b. Seal space outside of sleeves with mortar or grout. Pack sealing material solidly between sleeve and wall so no voids remain. Tool exposed surfaces smooth; protect material while curing.
 - 2. Use pipe sleeves unless penetration arrangement requires rectangular sleeved opening.
 - 3. Size pipe sleeves to provide 1/4-inch annular clear space between sleeve and raceway or cable unless sleeve seal is to be installed or unless seismic criteria require different clearance.
 - 4. Install sleeves for wall penetrations unless core-drilled holes or formed openings are used. Install sleeves during erection of walls. Cut sleeves to length for mounting flush with both surfaces of walls. Deburr after cutting.
 - 5. Install sleeves for floor penetrations. Extend sleeves installed in floors 2 inches above finished floor level. Install sleeves during erection of floors.
- D. Sleeves for Conduits Penetrating Non-Fire-Rated Gypsum Board Assemblies:
 - 1. Use circular metal sleeves unless penetration arrangement requires rectangular sleeved opening.
 - 2. Seal space outside of sleeves with approved joint compound for gypsum board assemblies.

END OF SECTION 260544

SECTION 260548.16 - SEISMIC CONTROLS FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and 2018 Greenbook and City of San Diego “Whitebook”, apply to this Section.

1.2 SUMMARY

- A. Section Includes:

- 1. Restraint channel bracings.
 - 2. Seismic-restraint accessories.
 - 3. Mechanical anchor bolts.

- B. Related Requirements:

- 1. Section 260529 "Hangers and Supports for Electrical Systems" for commonly used electrical supports and installation requirements.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.

- 1. Illustrate and indicate style, material, strength, fastening provision, and finish for each type and size of seismic-restraint component used.
 - a. Tabulate types and sizes of seismic restraints, complete with report numbers and rated strength in tension and shear as evaluated by an agency acceptable to authorities having jurisdiction.
 - b. Annotate to indicate application of each product submitted and compliance with requirements.

- B. Delegated-Design Submittal: For each seismic-restraint device.

- 1. Include design calculations and details for selecting seismic restraints complying with performance requirements, design criteria, and analysis data signed and sealed by the qualified professional engineer responsible for their preparation.
 - 2. Design Calculations: Calculate static and dynamic loading caused by equipment weight, operation, and seismic forces required to select seismic restraints and for designing vibration isolation bases.
 - a. Coordinate design calculations with wind load calculations required for equipment mounted outdoors. Comply with requirements in other Sections for equipment mounted outdoors.

3. Seismic-Restraint Details:

- a. Design Analysis: To support selection and arrangement of seismic restraints. Include calculations of combined tensile and shear loads.
- b. Details: Indicate fabrication and arrangement. Detail attachments of restraints to the restrained items and to the structure. Show attachment locations, methods, and spacings. Identify components, list their strengths, and indicate directions and values of forces transmitted to the structure during seismic events. Indicate association with vibration isolation devices.
- c. Coordinate seismic-restraint and vibration isolation details with wind-restraint details required for equipment mounted outdoors. Comply with requirements in other Sections for equipment mounted outdoors.
- d. Preapproval and Evaluation Documentation: By an agency acceptable to authorities having jurisdiction, showing maximum ratings of restraint items and the basis for approval (tests or calculations).

1.4 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For testing agency.
- B. Field quality-control reports.

1.5 QUALITY ASSURANCE

- A. Testing Agency Qualifications: An independent agency, with the experience and capability to conduct the testing indicated and that is acceptable to authorities having jurisdiction.
- B. Comply with seismic-restraint requirements in the IBC unless requirements in this Section are more stringent.
- C. Seismic-restraint devices shall have horizontal and vertical load testing and analysis. They shall bear anchorage preapproval from OSHPD in addition to preapproval, showing maximum seismic-restraint ratings, by ICC-ES or another agency acceptable to authorities having jurisdiction. Ratings based on independent testing are preferred to ratings based on calculations. If preapproved ratings are not available, submittals based on independent testing are preferred. Calculations (including combining shear and tensile loads) that support seismic-restraint designs must be signed and sealed by a qualified professional engineer.
- D. Comply with NFPA 70.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Seismic-Restraint Loading:
 1. Site Class as Defined in the IBC: D.
 2. Assigned Seismic Use Group or Building Category as Defined in the IBC: II.

- a. Component Importance Factor: 1.0.
 - b. Component Response Modification Factor: As applicable per ASCE 7-10.
 - c. Component Amplification Factor: As applicable per ASCE 7-10.
- 3. Design Spectral Response Acceleration at Short Periods (0.2 Second): 1.142
 - 4. Design Spectral Response Acceleration at 1.0-Second Period: 0.439

2.2 RESTRAINT CHANNEL BRACINGS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - 1. B-line, an Eaton business.
 - 2. Hilti, Inc.
 - 3. Mason Industries, Inc.
 - 4. Unistrut; Part of Atkore International.
- B. Description: MFMA-4, shop- or field-fabricated bracing assembly made of slotted steel channels with accessories for attachment to braced component at one end and to building structure at the other end, with other matching components, and with corrosion-resistant coating; rated in tension, compression, and torsion forces.

2.3 RESTRAINT CABLES

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - 1. Gripple Inc.
 - 2. Kinetics Noise Control, Inc.
 - 3. Vibration & Seismic Technologies, LLC.
 - 4. Vibration Mountings & Controls, Inc.
- B. Restraint Cables: ASTM A 492 stainless-steel cables. End connections made of steel assemblies with thimbles, brackets, swivel, and bolts designed for restraining cable service; with a minimum of two clamping bolts for cable engagement.

2.4 SEISMIC-RESTRAINT ACCESSORIES

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - 1. B-line, an Eaton business.
 - 2. Kinetics Noise Control, Inc.
 - 3. Mason Industries, Inc.
 - 4. TOLCO; a brand of NIBCO INC.
- B. Hanger-Rod Stiffener: Reinforcing steel angle clamped to hanger rod.

- C. Hinged and Swivel Brace Attachments: Multifunctional steel connectors for attaching hangers to rigid channel bracings and restraint cables.
- D. Bushing Assemblies for Wall-Mounted Equipment Anchorage: Assemblies of neoprene elements and steel sleeves designed for rigid equipment mountings and matched to type and size of attachment devices used.
- E. Resilient Isolation Washers and Bushings: One-piece, molded, oil- and water-resistant neoprene, with a flat washer face.

2.5 MECHANICAL ANCHOR BOLTS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. B-line, an Eaton business.
 - 2. Hilti, Inc.
 - 3. Mason Industries, Inc.
- B. Mechanical Anchor Bolts: Drilled-in and stud-wedge or female-wedge type in zinc-coated steel for interior applications and stainless steel for exterior applications. Select anchor bolts with strength required for anchor and as tested according to ASTM E 488.

2.6 ADHESIVE ANCHOR BOLTS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Hilti, Inc.
 - 2. Kinetics Noise Control, Inc.
 - 3. Mason Industries, Inc.
- B. Adhesive Anchor Bolts: Drilled-in and capsule anchor system containing PVC or urethane methacrylate-based resin and accelerator, or injected polymer or hybrid mortar adhesive. Provide anchor bolts and hardware with zinc-coated steel for interior applications and stainless steel for exterior applications. Select anchor bolts with strength required for anchor and as tested according to ASTM E 488.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine areas and equipment to receive seismic-control devices for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Examine roughing-in for reinforcement and cast-in-place anchors to verify actual locations before installation.

- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 APPLICATIONS

- A. Multiple Raceways or Cables: Secure raceways and cables to trapeze member with clamps approved for application by an agency acceptable to authorities having jurisdiction.
- B. Hanger-Rod Stiffeners: Install hanger-rod stiffeners where indicated or scheduled on Drawings to receive them and where required to prevent buckling of hanger rods caused by seismic forces.
- C. Strength of Support and Seismic-Restraint Assemblies: Where not indicated, select sizes of components so strength will be adequate to carry present and future static and seismic loads within specified loading limits.

3.3 SEISMIC-RESTRAINT DEVICE INSTALLATION

- A. Equipment and Hanger Restraints:
 - 1. Install resilient, bolt-isolation washers on equipment anchor bolts where clearance between anchor and adjacent surface exceeds 0.125 inch.
 - 2. Install seismic-restraint devices using methods approved by an agency acceptable to authorities having jurisdiction providing required submittals for component.
- B. Install cables so they do not bend across edges of adjacent equipment or building structure.
- C. Install bushing assemblies for mounting bolts for wall-mounted equipment, arranged to provide resilient media where equipment or equipment-mounting channels are attached to wall.
- D. Attachment to Structure: If specific attachment is not indicated, anchor bracing to structure at flanges of beams, at upper truss chords of bar joists, or at concrete members.
- E. Drilled-in Anchors:
 - 1. Identify position of reinforcing steel and other embedded items prior to drilling holes for anchors. Do not damage existing reinforcing or embedded items during coring or drilling. Notify the structural engineer if reinforcing steel or other embedded items are encountered during drilling. Locate and avoid prestressed tendons, electrical and telecommunications conduit, and gas lines.
 - 2. Do not drill holes in concrete or masonry until concrete, mortar, or grout has achieved full design strength.
 - 3. Wedge Anchors: Protect threads from damage during anchor installation. Heavy-duty sleeve anchors shall be installed with sleeve fully engaged in the structural element to which anchor is to be fastened.
 - 4. Adhesive Anchors: Clean holes to remove loose material and drilling dust prior to installation of adhesive. Place adhesive in holes proceeding from the bottom of the hole and progressing toward the surface in such a manner as to avoid introduction of air pockets in the adhesive.
 - 5. Set anchors to manufacturer's recommended torque using a torque wrench.

6. Install zinc-coated steel anchors for interior and stainless-steel anchors for exterior applications.

3.4 ACCOMMODATION OF DIFFERENTIAL SEISMIC MOTION

- A. Install flexible connections in runs of raceways, cables, wireways, cable trays, and busways where they cross seismic joints, where adjacent sections or branches are supported by different structural elements, and where connection is terminated to equipment that is anchored to a different structural element from the one supporting them as they approach equipment.

3.5 FIELD QUALITY CONTROL

- A. Testing Agency: Engage a qualified testing agency to perform tests and inspections.
- B. Perform the following tests and inspections:
 1. Provide evidence of recent calibration of test equipment by a testing agency acceptable to authorities having jurisdiction.
 2. Schedule test with Owner, through Architect, before connecting anchorage device to restrained component (unless post-connection testing has been approved), and with at least seven days' advance notice.
 3. Obtain Architect's approval before transmitting test loads to structure. Provide temporary load-spreading members.
 4. Test at least four of each type and size of installed anchors and fasteners selected by Architect.
 5. Test to 90 percent of rated proof load of device.
- C. Seismic controls will be considered defective if they do not pass tests and inspections.
- D. Prepare test and inspection reports.

3.6 ADJUSTING

- A. Adjust restraints to permit free movement of equipment within normal mode of operation.

END OF SECTION 260548.16

SECTION 260553 - IDENTIFICATION FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and 2018 Greenbook and City of San Diego “Whitebook”, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Color and legend requirements for raceways, conductors, and warning labels and signs.
 - 2. Labels.
 - 3. Tapes and stencils.
 - 4. Tags.
 - 5. Cable ties.
 - 6. Fasteners for labels and signs.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for electrical identification products.
- B. Samples: For each type of label and sign to illustrate composition, size, colors, lettering style, mounting provisions, and graphic features of identification products.
- C. Identification Schedule: For each piece of electrical equipment and electrical system components to be an index of nomenclature for electrical equipment and system components used in identification signs and labels. Use same designations indicated on Drawings.
- D. Delegated-Design Submittal: For arc-flash hazard study.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Comply with ASME A13.1.
- B. Comply with NFPA 70.
- C. Comply with 29 CFR 1910.144 and 29 CFR 1910.145.

- D. Comply with ANSI Z535.4 for safety signs and labels.
- E. Comply with NFPA 70E requirements for arc-flash warning labels.
- F. Adhesive-attached labeling materials, including label stocks, laminating adhesives, and inks used by label printers, shall comply with UL 969.
- G. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes.
 - 1. Temperature Change: 120 deg F, ambient; 180 deg F, material surfaces .

2.2 COLOR AND LEGEND REQUIREMENTS

- A. Raceways and Cables Carrying Circuits at 600 V or Less:
 - 1. Black letters on an orange field.
 - 2. Legend: Indicate voltage.
- B. Color-Coding for Phase- Identification, 600 V or Less: Use colors listed below for ungrounded feeder and branch-circuit conductors.
 - 1. Color shall be factory applied.
 - 2. Colors for 208/120-V Circuits:
 - a. Phase A: Black.
 - b. Phase B: Red.
 - c. Phase C: Blue.
 - 3. Color for Neutral: White, with phase color strip running along entire length.
 - 4. Color for Equipment Grounds: Green.
- C. Warning Label Colors:
 - 1. Identify system voltage with black letters on an orange background.
- D. Warning labels and signs shall include, but are not limited to, the following legends:
 - 1. Multiple Power Source Warning: "DANGER - ELECTRICAL SHOCK HAZARD - EQUIPMENT HAS MULTIPLE POWER SOURCES."
 - 2. Workspace Clearance Warning: "WARNING - OSHA REGULATION - AREA IN FRONT OF ELECTRICAL EQUIPMENT MUST BE KEPT CLEAR FOR 36 INCHES."
- E. Equipment Identification Labels:
 - 1. Black letters on a white field.

2.3 LABELS

- A. Vinyl Wraparound Labels: Preprinted, flexible labels laminated with a clear, weather- and chemical-resistant coating and matching wraparound clear adhesive tape for securing label ends.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. Brady Corporation.
 - b. Grafoplast Wire Markers.
 - c. HellermannTyton.
 - d. Panduit Corp.
- B. Self-Adhesive Wraparound Labels: Preprinted, 3-mil-thick, polyester flexible label with acrylic pressure-sensitive adhesive.
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Brady Corporation.
 - b. Brother International Corporation.
 - c. Grafoplast Wire Markers.
 - d. Ideal Industries, Inc.
 - e. Panduit Corp.
 - 2. Self-Lamination: Clear; UV-, weather- and chemical-resistant; self-laminating, protective shield over the legend. Labels sized such that the clear shield overlaps the entire printed legend.
 - 3. Marker for Labels: Permanent, waterproof, black ink marker recommended by tag manufacturer.
 - 4. Marker for Labels: Machine-printed, permanent, waterproof, black ink recommended by printer manufacturer.
- C. Self-Adhesive Labels: Polyester, thermal, transfer-printed, 3-mil-thick, multicolor, weather- and UV-resistant, pressure-sensitive adhesive labels, configured for intended use and location.
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Brady Corporation.
 - b. Brother International Corporation.
 - c. Grafoplast Wire Markers.
 - d. Ideal Industries, Inc.
 - e. Panduit Corp.
 - 2. Minimum Nominal Size:
 - a. 1-1/2 by 6 inches for raceway and conductors.
 - b. 3-1/2 by 5 inches for equipment.
 - c. As required by authorities having jurisdiction.

2.4 TAPES AND STENCILS

- A. Marker Tapes: Vinyl or vinyl-cloth, self-adhesive wraparound type, with circuit identification legend machine printed by thermal transfer or equivalent process.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. Carlton Industries, LP.
 - b. Ideal Industries, Inc.
 - c. Marking Services, Inc.
 - d. Panduit Corp.
- B. Self-Adhesive Vinyl Tape: Colored, heavy duty, waterproof, fade resistant; not less than 3 mils thick by 1 to 2 inches wide; compounded for outdoor use.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. Brady Corporation.
 - b. Carlton Industries, LP.
 - c. Marking Services, Inc.

2.5 SIGNS

- A. Laminated Acrylic or Melamine Plastic Signs:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. Brady Corporation.
 - b. Carlton Industries, LP.
 - c. Marking Services, Inc.
 - 2. Engraved legend.
 - 3. Thickness:
 - a. For signs up to 20 sq. in., minimum 1/16 inch thick.
 - b. For signs larger than 20 sq. in., 1/8 inch thick.
 - c. Engraved legend with black letters on white face.
 - d. Punched or drilled for mechanical fasteners.

2.6 CABLE TIES

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - 1. HellermannTyton.

2. Ideal Industries, Inc.
3. Marking Services, Inc.
4. Panduit Corp.

B. General-Purpose Cable Ties: Fungus inert, self-extinguishing, one piece, self-locking, and Type 6/6 nylon.

1. Minimum Width: 3/16 inch.
2. Tensile Strength at 73 Deg F according to ASTM D 638: 12,000 psi.
3. Temperature Range: Minus 40 to plus 185 deg F.
4. Color: Black, except where used for color-coding.

C. UV-Stabilized Cable Ties: Fungus inert, designed for continuous exposure to exterior sunlight, self-extinguishing, one piece, self-locking, and Type 6/6 nylon.

1. Minimum Width: 3/16 inch.
2. Tensile Strength at 73 Deg F according to ASTM D 638: 12,000 psi.
3. Temperature Range: Minus 40 to plus 185 deg F.
4. Color: Black.

2.7 Underground-Line Warning Tape:

A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:

1. Brady Corporation.
2. Ideal Industries, Inc.
3. Marking Services, Inc.
4. Seton Identification Products; a Brady Corporation company.

B. Tape:

1. Recommended by manufacturer for the method of installation and suitable to identify and locate underground electrical utility lines.
2. Printing on tape shall be permanent and shall not be damaged by burial operations.
3. Tape material and ink shall be chemically inert and not subject to degradation when exposed to acids, alkalis, and other destructive substances commonly found in soils.

C. Color and Printing:

1. Comply with ANSI Z535.1, ANSI Z535.2, ANSI Z535.3, ANSI Z535.4, and ANSI Z535.5.
2. Inscriptions for Red-Colored Tapes: "ELECTRIC LINE, HIGH VOLTAGE".
3. Stenciled Legend: In nonfading, waterproof, black ink or paint. Minimum letter height shall be 1 inch.

2.8 MISCELLANEOUS IDENTIFICATION PRODUCTS

- A. Paint: Comply with requirements in painting Sections for paint materials and application requirements. Retain paint system applicable for surface material and location (exterior or interior).
- B. Fasteners for Labels and Signs: Self-tapping, stainless-steel screws or stainless-steel machine screws with nuts and flat and lock washers.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Self-Adhesive Identification Products: Before applying electrical identification products, clean substrates of substances that could impair bond, using materials and methods recommended by manufacturer of identification product.

3.2 INSTALLATION

- A. Verify and coordinate identification names, abbreviations, colors, and other features with requirements in other Sections requiring identification applications, Drawings, Shop Drawings, manufacturer's wiring diagrams, and operation and maintenance manual. Use consistent designations throughout Project.
- B. Install identifying devices before installing acoustical ceilings and similar concealment.
- C. Verify identity of each item before installing identification products.
- D. Coordinate identification with Project Drawings, manufacturer's wiring diagrams, and operation and maintenance manual.
- E. Apply identification devices to surfaces that require finish after completing finish work.
- F. Install signs with approved legend to facilitate proper identification, operation, and maintenance of electrical systems and connected items.
- G. System Identification for Raceways and Cables under 600 V: Identification shall completely encircle cable or conduit. Place identification of two-color markings in contact, side by side.
 - 1. Secure tight to surface of conductor, cable, or raceway.
- H. Elevated Components: Increase sizes of labels, signs, and letters to those appropriate for viewing from the floor.
- I. Accessible Fittings for Raceways: Identify the covers of each junction and pull box of the following systems with the wiring system legend and system voltage. System legends shall be as follows:
 - 1. "POWER."

2. "INTERCOM."

J. Vinyl Wraparound Labels:

1. Secure tight to surface of raceway or cable at a location with high visibility and accessibility.
2. Attach labels that are not self-adhesive type with clear vinyl tape, with adhesive appropriate to the location and substrate.

K. Self-Adhesive Wraparound Labels: Secure tight to surface at a location with high visibility and accessibility.

L. Self-Adhesive Labels:

1. On each item, install unique designation label that is consistent with wiring diagrams, schedules, and operation and maintenance manual.
2. Unless otherwise indicated, provide a single line of text with 1/2-inch-high letters on 1-1/2-inch-high label; where two lines of text are required, use labels 2 inches high.

M. Marker Tapes: Secure tight to surface at a location with high visibility and accessibility.

N. Self-Adhesive Vinyl Tape: Secure tight to surface at a location with high visibility and accessibility.

1. Field-Applied, Color-Coding Conductor Tape: Apply in half-lapped turns for a minimum distance of 6 inches where splices or taps are made. Apply last two turns of tape with no tension to prevent possible unwinding.

O. Tape and Stencil: Comply with requirements in painting Sections for surface preparation and paint application.

P. Floor Marking Tape: Apply stripes to finished surfaces following manufacturer's written instructions.

Q. Laminated Acrylic or Melamine Plastic Signs:

1. Attach signs that are not self-adhesive type with mechanical fasteners appropriate to the location and substrate.
2. Unless otherwise indicated, provide a single line of text with 1/2-inch-high letters on 1-1/2-inch-high sign; where two lines of text are required, use labels 2 inches high.

R. Cable Ties: General purpose, for attaching tags, except as listed below:

1. Outdoors: UV-stabilized nylon.

3.3 IDENTIFICATION SCHEDULE

A. Install identification materials and devices at locations for most convenient viewing without interference with operation and maintenance of equipment. Install access doors or panels to provide view of identifying devices.

- B. Identify conductors, cables, and terminals in enclosures and at junctions, terminals, pull points, and locations of high visibility. Identify by system and circuit designation.
- C. Accessible Raceways and Metal-Clad Cables, 600 V or Less, for Service, Feeder, and Branch Circuits, More Than 30 A and 120 V to Ground: Identify with self-adhesive raceway labels.
 - 1. Locate identification at changes in direction, at penetrations of walls and floors, at 50-foot maximum intervals in straight runs, and at 25-foot maximum intervals in congested areas.
- D. Accessible Fittings for Raceways and Cables within Buildings: Identify the covers of each junction and pull box of the following systems with self-adhesive labels containing the wiring system legend and system voltage. System legends shall be as follows:
 - 1. "POWER."
 - 2. "INTERCOM."
- E. Power-Circuit Conductor Identification, 600 V or Less: For conductors in vaults, pull and junction boxes, manholes, and handholes, use self-adhesive vinyl tape to identify the phase.
 - 1. Locate identification at changes in direction, at penetrations of walls and floors, at 50-foot maximum intervals in straight runs, and at 25-foot maximum intervals in congested areas.
- F. Control-Circuit Conductor Identification: For conductors and cables in pull and junction boxes, manholes, and handholes, use self-adhesive labels with the conductor or cable designation, origin, and destination.
- G. Control-Circuit Conductor Termination Identification: For identification at terminations, provide self-adhesive labels with the conductor designation.
- H. Workspace Indication: Apply floor marking tape to finished surfaces. Show working clearances in the direction of access to live parts. Workspace shall comply with NFPA 70 and 29 CFR 1926.403 unless otherwise indicated. Do not install at flush-mounted panelboards and similar equipment in finished spaces.
- I. Instructional Signs: Self-adhesive labels, including the color code for grounded and ungrounded conductors.
- J. Warning Labels for Indoor Cabinets, Boxes, and Enclosures for Power and Lighting: Self-adhesive labels.
 - 1. Apply to exterior of door, cover, or other access.
 - 2. For equipment with multiple power or control sources, apply to door or cover of equipment, including, but not limited to, the following:
 - a. Controls with external control power connections.
- K. Arc Flash Warning Labeling: Self-adhesive labels.
- L. Operating Instruction Signs: Laminated acrylic or melamine plastic signs.

M. Equipment Identification Labels:

1. Indoor Equipment: Laminated acrylic or melamine plastic sign.
2. Outdoor Equipment: Laminated acrylic or melamine sign.
3. Equipment to Be Labeled:
 - a. Panelboards: Typewritten directory of circuits in the location provided by panelboard manufacturer. Panelboard identification shall be in the form of an engraved, laminated acrylic or melamine label.
 - b. Enclosures and electrical cabinets.
 - c. Access doors and panels for concealed electrical items.
 - d. Enclosed switches.
 - e. Enclosed circuit breakers.
 - f. Enclosed controllers.
 - g. Push-button stations.
 - h. Contactors.

END OF SECTION 260553

SECTION 262813 - FUSES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and 2018 Greenbook and City of San Diego “Whitebook”, apply to this Section.

1.2 SUMMARY

- A. Section Includes:

1. Cartridge fuses rated 600 V ac and less for use in the following:
 - a. Control circuits.
 - b. Enclosed controllers.
 - c. Enclosed switches.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for spare-fuse cabinets. Include the following for each fuse type indicated:
 1. Ambient Temperature Adjustment Information: If ratings of fuses have been adjusted to accommodate ambient temperatures, provide list of fuses with adjusted ratings.
 - a. For each fuse having adjusted ratings, include location of fuse, original fuse rating, local ambient temperature, and adjusted fuse rating.
 - b. Provide manufacturer's technical data on which ambient temperature adjustment calculations are based.
 2. Dimensions and manufacturer's technical data on features, performance, electrical characteristics, and ratings.
 3. Current-limitation curves for fuses with current-limiting characteristics.
 4. Time-current coordination curves (average melt) and current-limitation curves (instantaneous peak let-through current) for each type and rating of fuse. Submit in PDF format.
 5. Coordination charts and tables and related data.

1.4 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For fuses to include in emergency, operation, and maintenance manuals. In addition to items specified in Section 017823 "Operation and Maintenance Data," include the following:

1. Ambient temperature adjustment information.
2. Current-limitation curves for fuses with current-limiting characteristics.
3. Time-current coordination curves (average melt) and current-limitation curves (instantaneous peak let-through current) for each type and rating of fuse used on the Project. Submit in PDF format.
4. Coordination charts and tables and related data.

1.5 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 1. Fuses: Equal to 10 percent of quantity installed for each size and type, but no fewer than three of each size and type.

1.6 FIELD CONDITIONS

- A. Where ambient temperature to which fuses are directly exposed is less than 40 deg F or more than 100 deg F, apply manufacturer's ambient temperature adjustment factors to fuse ratings.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 1. Bussmann, an Eaton business.
 2. Littelfuse, Inc.
 3. Mersen USA.
- B. Source Limitations: Obtain fuses, for use within a specific product or circuit, from single source from single manufacturer.

2.2 CARTRIDGE FUSES

- A. Characteristics: NEMA FU 1, current-limiting, nonrenewable cartridge fuses with voltage ratings consistent with circuit voltages.
 1. Type RK-5: 250-V, zero- to 600-A rating, 200 kAIC, time delay.
 2. Type CC: 600-V, zero- to 30-A rating, 200 kAIC, fast acting.
- B. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- C. Comply with NEMA FU 1 for cartridge fuses.
- D. Comply with NFPA 70.

- E. Coordinate fuse ratings with utilization equipment nameplate limitations of maximum fuse size and with system short-circuit current levels.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine fuses before installation. Reject fuses that are moisture damaged or physically damaged.
- B. Examine holders to receive fuses for compliance with installation tolerances and other conditions affecting performance, such as rejection features.
- C. Examine utilization equipment nameplates and installation instructions. Install fuses of sizes and with characteristics appropriate for each piece of equipment.
- D. Evaluate ambient temperatures to determine if fuse rating adjustment factors must be applied to fuse ratings.
- E. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 FUSE APPLICATIONS

- A. Cartridge Fuses:
 - 1. Motor Branch Circuits: Class RK5, time delay.
 - 2. Control Transformer Circuits: Class CC, time delay, control transformer duty.
 - 3. Provide open-fuse indicator fuses or fuse covers with open fuse indication.

3.3 INSTALLATION

- A. Install fuses in fusible devices. Arrange fuses so rating information is readable without removing fuse.

3.4 IDENTIFICATION

- A. Install labels complying with requirements for identification specified in Section 260553 "Identification for Electrical Systems" and indicating fuse replacement information inside of door of each fused switch and adjacent to each fuse block, socket, and holder.

END OF SECTION 262813

SECTION 262816 - ENCLOSED SWITCHES AND CIRCUIT BREAKERS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and 2018 Greenbook and City of San Diego “Whitebook”, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Fusible switches.
 - 2. Nonfusible switches.
 - 3. Enclosures.

1.3 DEFINITIONS

- A. NC: Normally closed.
- B. NO: Normally open.
- C. SPDT: Single pole, double throw.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of enclosed switch, circuit breaker, accessory, and component indicated. Include nameplate ratings, dimensioned elevations, sections, weights, and manufacturers' technical data on features, performance, electrical characteristics, ratings, accessories, and finishes.
 - 1. Enclosure types and details for types other than NEMA 250, Type 1.
 - 2. Current and voltage ratings.
 - 3. Short-circuit current ratings (interrupting and withstand, as appropriate).
 - 4. Include evidence of a nationally recognized testing laboratory (NRTL) listing for series rating of installed devices.
 - 5. Detail features, characteristics, ratings, and factory settings of individual overcurrent protective devices, accessories, and auxiliary components.
 - 6. Include time-current coordination curves (average melt) for each type and rating of overcurrent protective device; include selectable ranges for each type of overcurrent protective device. Provide in PDF electronic format.
- B. Shop Drawings: For enclosed switches and circuit breakers.
 - 1. Include plans, elevations, sections, details, and attachments to other work.

2. Include wiring diagrams for power, signal, and control wiring.

1.5 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For qualified testing agency.
- B. Seismic Qualification Certificates: For enclosed switches and circuit breakers, accessories, and components, from manufacturer.
 1. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculation.
 2. Dimensioned Outline Drawings of Equipment Unit: Identify center of gravity and locate and describe mounting and anchorage provisions.
 3. Detailed description of equipment anchorage devices on which the certification is based and their installation requirements.
- C. Field quality-control reports.

1.6 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For enclosed switches and circuit breakers to include in emergency, operation, and maintenance manuals.
 1. In addition to items specified in Section 017823 "Operation and Maintenance Data," include the following:
 - a. Manufacturer's written instructions for testing and adjusting enclosed switches and circuit breakers.
 - b. Time-current coordination curves (average melt) for each type and rating of overcurrent protective device; include selectable ranges for each type of overcurrent protective device. Provide in PDF electronic format.

1.7 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 1. Fuses: Equal to 10 percent of quantity installed for each size and type, but no fewer than three of each size and type.
 2. Fuse Pullers: Two for each size and type.

1.8 QUALITY ASSURANCE

- A. Testing Agency Qualifications: Accredited by NETA.
 1. Testing Agency's Field Supervisor: Currently certified by NETA to supervise on-site testing.

1.9 FIELD CONDITIONS

- A. Environmental Limitations: Rate equipment for continuous operation under the following conditions unless otherwise indicated:
 - 1. Ambient Temperature: Not less than minus 22 deg F and not exceeding 104 deg F.
 - 2. Altitude: Not exceeding 6600 feet.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Seismic Performance: Enclosed switches and circuit breakers shall withstand the effects of earthquake motions determined according to ASCE/SEI 7.
 - 1. The term "withstand" means "the unit will remain in place without separation of any parts from the device when subjected to the seismic forces specified and the unit will be fully operational after the seismic event."

2.2 GENERAL REQUIREMENTS

- A. Source Limitations: Obtain enclosed switches and circuit breakers, overcurrent protective devices, components, and accessories, within same product category, from single manufacturer.
- B. Product Selection for Restricted Space: Drawings indicate maximum dimensions for enclosed switches and circuit breakers, including clearances between enclosures, and adjacent surfaces and other items. Comply with indicated maximum dimensions.
- C. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by an NRTL, and marked for intended location and application.
- D. Comply with NFPA 70.

2.3 FUSIBLE SWITCHES

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Eaton.
 - 2. General Electric Company.
 - 3. Siemens Industry, Inc., Energy Management Division.
 - 4. Square D; by Schneider Electric.
- B. Type HD, Heavy Duty:
 - 1. Single throw.
 - 2. Three pole.
 - 3. 240-V ac.

4. 200 A and smaller.
5. UL 98 and NEMA KS 1, horsepower rated, with clips or bolt pads to accommodate specified fuses.
6. Lockable handle with capability to accept three padlocks, and interlocked with cover in closed position.

C. Accessories:

1. Equipment Ground Kit: Internally mounted and labeled for copper and aluminum ground conductors.
2. Class R Fuse Kit: Provides rejection of other fuse types when Class R fuses are specified.
3. Auxiliary Contact Kit: One NO/NC (Form "C") auxiliary contact(s), arranged to activate before switch blades open. Contact rating - 120-V ac.
4. Lugs: Mechanical type, suitable for number, size, and conductor material.

2.4 NONFUSIBLE SWITCHES

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Eaton.
2. General Electric Company.
3. Siemens Industry, Inc., Energy Management Division.
4. Square D; by Schneider Electric.

B. Type HD, Heavy Duty, Three Pole, Single Throw, 240-V ac, 1200 A and Smaller: UL 98 and NEMA KS 1, horsepower rated, lockable handle with capability to accept three padlocks, and interlocked with cover in closed position.

C. Accessories:

1. Equipment Ground Kit: Internally mounted and labeled for copper and aluminum ground conductors.
2. Lugs: Mechanical type, suitable for number, size, and conductor material.

2.5 ENCLOSURES

A. Enclosed Switches and Circuit Breakers: UL 489, NEMA KS 1, NEMA 250, and UL 50, to comply with environmental conditions at installed location.

B. Enclosure Finish: The enclosure shall be a brush finish on Type 304 stainless steel (NEMA 250 Type 4-4X stainless steel).

C. Conduit Entry: NEMA 250 Types 4, 4X, and 12 enclosures shall contain no knockouts.

D. Operating Mechanism: The circuit-breaker operating handle shall be externally operable with the operating mechanism being an integral part of the box, not the cover. The cover interlock mechanism shall have an externally operated override. The override shall not permanently disable the interlock mechanism, which shall return to the locked position once the override is

released. The tool used to override the cover interlock mechanism shall not be required to enter the enclosure in order to override the interlock.

- E. Enclosures designated as NEMA 250 Type 4, 4X stainless steel, 12, or 12K shall have a dual cover interlock mechanism to prevent unintentional opening of the enclosure cover when the circuit breaker is ON and to prevent turning the circuit breaker ON when the enclosure cover is open.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine elements and surfaces to receive enclosed switches and circuit breakers for compliance with installation tolerances and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
 - 1. Commencement of work shall indicate Installer's acceptance of the areas and conditions as satisfactory.

3.2 PREPARATION

- A. Interruption of Existing Electric Service: Do not interrupt electric service to facilities occupied by Owner or others unless permitted under the following conditions and then only after arranging to provide temporary electric service according to requirements indicated:
 - 1. Notify Owner no fewer than seven days in advance of proposed interruption of electric service.
 - 2. Indicate method of providing temporary electric service.
 - 3. Do not proceed with interruption of electric service without Owner's written permission.
 - 4. Comply with NFPA 70E.

3.3 ENCLOSURE ENVIRONMENTAL RATING APPLICATIONS

- A. Enclosed Switches and Circuit Breakers: Provide enclosures at installed locations with the following environmental ratings.
 - 1. Indoor, Dry and Clean Locations: NEMA 250, Type 1.
 - 2. Outdoor Locations: NEMA 250, Type 4X stainless steel.
 - 3. Wet or Damp, Indoor Locations: NEMA 250, Type 4X stainless steel.

3.4 INSTALLATION

- A. Coordinate layout and installation of switches and components with equipment served and adjacent surfaces. Maintain required workspace clearances and required clearances for equipment access doors and panels.

- B. Install individual wall-mounted switches and circuit breakers with tops at uniform height unless otherwise indicated.
- C. Comply with mounting and anchoring requirements specified in Section 260548.16 "Seismic Controls for Electrical Systems."
- D. Install fuses in fusible devices.
- E. Comply with NFPA 70 and NECA 1.

3.5 IDENTIFICATION

- A. Comply with requirements in Section 260553 "Identification for Electrical Systems."
 - 1. Identify field-installed conductors, interconnecting wiring, and components; provide warning signs.
 - 2. Label each enclosure with engraved metal or laminated-plastic nameplate.

3.6 FIELD QUALITY CONTROL

- A. Testing Agency: Owner will engage a qualified testing agency to perform tests and inspections.
- B. Testing Agency: Engage a qualified testing agency to perform tests and inspections.
- C. Manufacturer's Field Service: Engage a factory-authorized service representative to test and inspect components, assemblies, and equipment installations, including connections.
- D. Perform tests and inspections.
- E. Tests and Inspections for Switches:
 - 1. Visual and Mechanical Inspection:
 - a. Inspect physical and mechanical condition.
 - b. Inspect anchorage, alignment, grounding, and clearances.
 - c. Verify that the unit is clean.
 - d. Verify blade alignment, blade penetration, travel stops, and mechanical operation.
 - e. Verify that fuse sizes and types match the Specifications and Drawings.
 - f. Verify that each fuse has adequate mechanical support and contact integrity.
 - g. Inspect bolted electrical connections for high resistance using one of the two following methods:
 - 1) Use a low-resistance ohmmeter.
 - a) Compare bolted connection resistance values to values of similar connections. Investigate values that deviate from those of similar bolted connections by more than 50 percent of the lowest value.

- 2) Verify tightness of accessible bolted electrical connections by calibrated torque-wrench method in accordance with manufacturer's published data or NETA ATS Table 100.12.
 - a) Bolt-torque levels shall be in accordance with manufacturer's published data. In the absence of manufacturer's published data, use NETA ATS Table 100.12.
 - h. Verify that operation and sequencing of interlocking systems is as described in the Specifications and shown on the Drawings.
 - i. Verify correct phase barrier installation.
 - j. Verify lubrication of moving current-carrying parts and moving and sliding surfaces.

2. Electrical Tests:

- a. Perform resistance measurements through bolted connections with a low-resistance ohmmeter. Compare bolted connection resistance values to values of similar connections. Investigate values that deviate from adjacent poles or similar switches by more than 50 percent of the lowest value.
- b. Measure contact resistance across each switchblade fuseholder. Drop values shall not exceed the high level of the manufacturer's published data. If manufacturer's published data are not available, investigate values that deviate from adjacent poles or similar switches by more than 50 percent of the lowest value.
- c. Perform insulation-resistance tests for one minute on each pole, phase-to-phase and phase-to-ground with switch closed, and across each open pole. Apply voltage in accordance with manufacturer's published data. In the absence of manufacturer's published data, use Table 100.1 from the NETA ATS. Investigate values of insulation resistance less than those published in Table 100.1 or as recommended in manufacturer's published data.
- d. Measure fuse resistance. Investigate fuse-resistance values that deviate from each other by more than 15 percent.
- e. Perform ground fault test according to NETA ATS 7.14 "Ground Fault Protection Systems, Low-Voltage."

3.7 ADJUSTING

- A. Adjust moving parts and operable components to function smoothly and lubricate as recommended by manufacturer.

END OF SECTION 262816

SECTION 262913.03 - MANUAL AND MAGNETIC MOTOR CONTROLLERS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and 2018 Greenbook and City of San Diego “Whitebook”, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Combination full-voltage magnetic motor controllers.
 - 2. Magnetic contactors.
 - 3. Enclosures.
 - 4. Accessories.
 - 5. Identification.

1.3 DEFINITIONS

- A. CPT: Control power transformer.
- B. MCCB: Molded-case circuit breaker.
- C. MCP: Motor circuit protector.
- D. NC: Normally closed.
- E. OCPD: Overcurrent protective device.
- F. SCCR: Short-circuit current rating.
- G. SCPD: Short-circuit protective device.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Include rated capacities, operating characteristics, electrical characteristics, and furnished specialties and accessories.
- B. Shop Drawings: For each type of magnetic controller.
 - 1. Include plans, elevations, sections, and mounting details.
 - 2. Indicate dimensions, weights, required clearances, and location and size of each field connection.

3. Wire Termination Diagrams and Schedules: Include diagrams for signal, and control wiring. Identify terminals and wiring designations and color-codes to facilitate installation, operation, and maintenance. Indicate recommended types, wire sizes, and circuiting arrangements for field-installed wiring, and show circuit protection features. Differentiate between manufacturer-installed and field-installed wiring.
4. Include features, characteristics, ratings, and factory settings of individual overcurrent protective devices and auxiliary components.

1.5 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For testing agency.
- B. Seismic Qualification Data: Certificates, for magnetic controllers, from manufacturer.
 1. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculation.
 2. Dimensioned Outline Drawings of Equipment Unit: Identify center of gravity and locate and describe mounting and anchorage provisions.
 3. Detailed description of equipment anchorage devices on which the certification is based and their installation requirements.
- C. Field quality-control reports.

1.6 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For magnetic controllers to include in operation and maintenance manuals.
 1. In addition to items specified in Section 017823 "Operation and Maintenance Data," include the following:
 - a. Routine maintenance requirements for magnetic controllers and installed components.
 - b. Manufacturer's written instructions for testing and adjusting circuit breaker and MCP trip settings.
 - c. Manufacturer's written instructions for setting field-adjustable overload relays.
 - d. Load-Current and Overload-Relay Heater List: Compile after motors have been installed, and arrange to demonstrate that selection of heaters suits actual motor nameplate full-load currents.
 - e. Load-Current and List of Settings of Adjustable Overload Relays: Compile after motors have been installed, and arrange to demonstrate that switch settings for motor-running overload protection suit actual motors to be protected.

1.7 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Fuses for Fused Switches: Equal to 10 percent of quantity installed for each size and type, but no fewer than three of each size and type.
2. Control Power Fuses: Equal to 10 percent of quantity installed for each size and type, but no fewer than two of each size and type.
3. Indicating Lights: Two of each type and color installed.
4. Auxiliary Contacts: Furnish one spare for each size and type of magnetic controller installed.
5. Power Contacts: Furnish three spares for each size and type of magnetic contactor installed.

1.8 QUALITY ASSURANCE

A. Testing Agency Qualifications: Accredited by NETA.

1. Testing Agency's Field Supervisor: Certified by NETA to supervise on-site testing.

1.9 DELIVERY, STORAGE, AND HANDLING

- A. Store controllers indoors in clean, dry space with uniform temperature to prevent condensation. Protect controllers from exposure to dirt, fumes, water, corrosive substances, and physical damage.
- B. If stored in areas subject to weather, cover controllers to protect them from weather, dirt, dust, corrosive substances, and physical damage. Remove loose packing and flammable materials from inside controllers;.

1.10 FIELD CONDITIONS

- A. Ambient Environment Ratings: Rate equipment for continuous operation under the following conditions unless otherwise indicated:
 1. Ambient Temperature: Not less than 23 deg F and not exceeding 104 deg F.
 2. Altitude: Not exceeding 6600 feet for electromagnetic and manual devices.
 3. The effect of solar radiation is not significant.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and use.
- B. UL Compliance: Fabricate and label magnetic motor controllers to comply with UL 508 and UL 60947-4-1.
- C. NEMA Compliance: Fabricate motor controllers to comply with ICS 2.

- D. Seismic Performance: Magnetic controllers shall withstand the effects of earthquake motions determined according to ASCE/SEI 7.
1. The term "withstand" means "the controller will remain in place without separation of any parts when subjected to the seismic forces specified and the unit will be fully operational after the seismic event."
 2. Component Importance Factor: 1.0.
 3. Component Response Modification Factor: As applicable per ASCE 7-10.
 4. Component Amplification Factor: As applicable per ASCE 7-10.

2.2 ENCLOSED FULL-VOLTAGE MAGNETIC MOTOR CONTACTORS

- A. Description: Horsepower rated, electrically held, three pole, for nominal system voltage of 600-V ac and less.
- B. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
1. Square D; by Schneider Electric
 2. Eaton.
 3. Siemens Industry, Inc., Energy Management Division.
- C. Standard: Comply with NEMA ICS 2, general purpose, Class A.
- D. Configuration: Nonreversing.
- E. Contactor Coils: Pressure-encapsulated type.
1. Operating Voltage: 120 volt.
- F. Control Power:
1. From external source as indicated on the drawings.
- G. Overload Relays: none required.

2.3 COMBINATION FULL-VOLTAGE MAGNETIC MOTOR CONTROLLER

- A. Description: Factory-assembled, combination full-voltage magnetic motor controller consisting of the controller described in this article, indicated disconnecting means, SCPD and OCPD, in a single enclosure.
- B. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
1. Eaton.
 2. Siemens Industry, Inc., Energy Management Division.
 3. Square D; by Schneider Electric.
- C. Standard: Comply with NEMA ICS 2, general purpose, Class A.

- D. Configuration: Nonreversing.
- E. Contactor Coils: Pressure-encapsulated type.
 - 1. Operating Voltage: Manufacturer's standard, unless indicated.
- F. Control Power:
 - 1. For on-board control power, obtain from line circuit or from integral CPT. The CPT shall have capacity to operate integral devices and remotely located pilot, indicating, and control devices.
 - a. Spare CPT Capacity as Indicated on Drawings: 50 VA.
- G. Overload Relays:
 - 1. Solid-State Overload Relay:
 - a. Switch or dial selectable for motor-running overload protection.
 - b. Sensors in each phase.
 - c. Class 10/20 selectable tripping characteristic selected to protect motor against voltage and current unbalance and single phasing.
- H. Class II ground-fault protection shall comply with UL 1053 to interrupt low-level ground faults. The ground-fault detection system shall include circuitry that will prevent the motor controller from tripping when the fault current exceeds the interrupting capacity of the controller. Equip with start and run delays to prevent nuisance trip on starting, and a trip indicator.
- I. Fusible Disconnecting Means:
 - 1. NEMA KS 1, heavy-duty, horsepower-rated, fusible switch with clips or bolt pads to accommodate indicated fuses.
 - 2. Lockable Handle: Accepts three padlocks and interlocks with cover in closed position.

2.4 ENCLOSURES

- A. Comply with NEMA 250, type designations as indicated on Drawings, complying with environmental conditions at installed location.
- B. The construction of the enclosures shall comply with NEMA ICS 6.

2.5 ACCESSORIES

- A. General Requirements for Control Circuit and Pilot Devices: NEMA ICS 5; factory installed in controller enclosure cover unless otherwise indicated.
 - 1. Push Buttons, Pilot Lights, and Selector Switches: Standard-duty, except as needed to match enclosure type.
 - a. Selector Switches: Hand-Off-Auto selector.

- b. Pilot Lights: Red pilot light for running indication.

2.6 IDENTIFICATION

- A. Controller Nameplates: Laminated acrylic or melamine plastic signs, as described in Section 260553 "Identification for Electrical Systems," for each compartment, mounted with corrosion-resistant screws.
- B. Arc-Flash Warning Labels:
 - 1. Comply with requirements in Section 260553 "Identification for Electrical Systems." Produce a 3.5-by-5-inch self-adhesive equipment label for each work location included in the analysis. Labels shall be machine printed, with no field-applied markings.
 - a. The label shall have an orange header with the wording, "WARNING, ARC-FLASH HAZARD," and shall include the following information taken directly from the arc-flash hazard analysis:
 - 1) Location designation.
 - 2) Nominal voltage.
 - 3) Flash protection boundary.
 - 4) Hazard risk category.
 - 5) Incident energy.
 - 6) Working distance.
 - 7) Engineering report number, revision number, and issue date.
 - b. Labels shall be machine printed, with no field-applied markings.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine areas and space conditions for compliance with requirements for motor controllers, their relationship with the motors, and other conditions affecting performance of the Work.

3.2 INSTALLATION

- A. Comply with NECA 1.
- B. Wall-Mounted Controllers and Contactors: Install magnetic controllers and contactors on walls with tops at uniform height indicated, and by bolting units to wall or mounting on lightweight structural-steel channels bolted to wall. Comply with requirements for limited available existing spaces.
- C. Comply with requirements for seismic control devices specified in Section 260548.16 "Seismic Controls for Electrical Systems."
- D. Maintain minimum clearances and workspace at equipment according to manufacturer's written instructions and CEC.

- E. Wiring within Enclosures: Bundle, lace, and train conductors to terminal points with no excess and without exceeding manufacturer's limitations on bending radii. Install lacing bars and distribution spools.
- F. Setting of Overload Relays: Select and set overloads on the basis of full-load current rating as shown on motor nameplate. Adjust setting value for special motors as required by NFPA 70 for motors that are high-torque, high-efficiency, and so on.

3.3 IDENTIFICATION

- A. Identify system components, wiring, cabling, and terminals. Comply with requirements for identification specified in Section 260553 "Identification for Electrical Systems."

3.4 FIELD QUALITY CONTROL

- A. Testing Agency: Engage a qualified testing agency to perform tests and inspections.
- B. Manufacturer's Field Service: Engage a factory-authorized service representative to test and inspect components, assemblies, and equipment installations, including connections.
- C. Perform tests and inspections.
- D. Tests and Inspections:
 - 1. Comply with the provisions of NFPA 70B, "Testing and Test Methods" Chapter.
 - 2. Visual and Mechanical Inspection:
 - a. Compare equipment nameplate data with drawings and specifications.
 - b. Inspect physical and mechanical condition.
 - c. Inspect anchorage, alignment, and grounding.
 - d. Verify the unit is clean.
 - e. Inspect contactors:
 - 1) Verify mechanical operation.
 - 2) Verify contact gap, wipe, alignment, and pressure are according to manufacturer's published data.
 - f. Motor-Running Protection:
 - 1) Verify overload element rating is correct for its application.
 - 2) If motor-running protection is provided by fuses, verify correct fuse rating.
 - g. Inspect bolted electrical connections for high resistance using one of the two following methods:
 - 1) Use a low-resistance ohmmeter. Compare bolted connection resistance values with values of similar connections. Investigate values that deviate from those of similar bolted connections by more than 50 percent of the lowest value.

- 2) Verify tightness of accessible bolted electrical connections by calibrated torque-wrench method according to manufacturer's published data or NETA ATS Table 100.12. Bolt-torque levels shall be according to manufacturer's published data. In the absence of manufacturer's published data, use NETA ATS Table 100.12.
- h. Verify appropriate lubrication on moving current-carrying parts and on moving and sliding surfaces.
3. Electrical Tests:
 - a. Perform insulation-resistance tests for one minute on each pole, phase-to-phase and phase-to-ground with switch closed, and across each open pole. Insulation-resistance values shall be according to manufacturer's published data or NETA ATS Table 100.1. In the absence of manufacturer's published data, use Table 100.5. Values of insulation resistance less than those of this table or manufacturer's recommendations shall be investigated and corrected.
 - b. Measure fuse resistance. Investigate fuse-resistance values that deviate from each other by more than 15 percent.
 - c. Test motor protection devices according to manufacturer's published data.
 - d. Test circuit breakers as follows:
 - 1) Operate the circuit breaker to ensure smooth operation.
 - 2) For adjustable circuit breakers, adjust protective device settings according to the coordination study. Comply with coordination study recommendations.
 - e. Perform operational tests by initiating control devices.
4. Infrared Inspection: Perform the survey during periods of maximum possible loading. Remove all necessary covers prior to the inspection.
 - a. Comply with the recommendations of NFPA 70B, "Testing and Test Methods" Chapter, "Infrared Inspection" Article.
 - b. After Substantial Completion, but not more than 60 days after Final Acceptance, perform infrared inspection of the electrical power connections of each motor controller.
 - c. Follow-up Infrared Scanning: Perform an additional follow-up infrared scan of each motor controller 11 months after date of Substantial Completion.
 - d. Report of Infrared Inspection: Prepare a certified report that identifies the testing technician and equipment used, and lists the following results:
 - 1) Description of equipment to be tested.
 - 2) Discrepancies.
 - 3) Temperature difference between the area of concern and the reference area.
 - 4) Probable cause of temperature difference.
 - 5) Areas inspected. Identify inaccessible and unobservable areas and equipment.
 - 6) Load conditions at time of inspection.
 - 7) Photographs and thermograms of the deficient area.
 - 8) Recommended action.

- e. Equipment: Inspect distribution systems with imaging equipment capable of detecting a minimum temperature difference of 1 deg C at 30 deg C. The equipment shall detect emitted radiation and convert detected radiation to a visual signal.
 - f. Act on inspection results and recommended action, and considering the recommendations of NETA ATS, Table 100.18. Correct possible and probable deficiencies as soon as Owner's operations permit. Retest until deficiencies are corrected.
- E. Motor controller or contactor will be considered defective if it does not pass tests and inspections.
- F. Prepare test and inspection reports.

3.5 SYSTEM FUNCTION TESTS

- A. System function tests shall prove the correct interaction of sensing, processing, and action devices. Perform system function tests after field quality control tests have been completed and all components have passed specified tests.
 - 1. Develop test parameters and perform tests for the purpose of evaluating performance of integral components and their functioning as a complete unit within design requirements and manufacturer's published data.
 - 2. Verify the correct operation of interlock safety devices for fail-safe functions in addition to design function.
 - 3. Verify the correct operation of sensing devices, alarms, and indicating devices.
- B. Motor controller or contactor will be considered defective if it does not pass the system function tests and inspections.
- C. Prepare test and inspection reports.

3.6 DEMONSTRATION

- A. Train Owner's maintenance personnel to adjust, operate, and maintain switchgear.

END OF SECTION 262913.03

SUPPLEMENTARY SPECIAL PROVISIONS

APPENDICES

APPENDIX A

NOTICE OF EXEMPTION

NOTICE OF EXEMPTION

(Check one or both)

TO: ☒ Recorder/County Clerk
P.O. Box 1750, MS A-33
1600 Pacific Hwy, Room 260
San Diego, CA 92101-2400

FROM: City of San Diego
Public Works Department
525 B Street, Suite 750, MS 908A
San Diego, CA 92101

☐ Office of Planning and Research
1400 Tenth Street, Room 121
Sacramento, CA 95814

Project Name: City Heights Pool Reconstruction

WBS No.: B-18044.02.06

Project Location-Specific: The project is located at 4380 Landis Street within the Mid-City City Heights Community Planning Area, Council District 9.

Project Location-City/County: San Diego/San Diego

Description of nature and purpose of the Project: The City Heights Pool Reconstruction project will demolish and replace the existing pool shell, inner and outer pool deck, below grade pool piping, water slide, and children's pool deck drainage and shell. Additional improvements will include pool lighting, pool furniture, a new shade structure, and gates. Construction of the pool shell and pool decking and children's pool will be consistent with the existing configuration.

Name of Public Agency Approving Project: City of San Diego

Name of Person or Agency Carrying Out Project: Gretchen Eichar, 525 B Street, Suite 750, San Diego, CA 92101, (619) 533-4110

Exempt Status: (CHECK ONE)

- ☐ Ministerial (Sec. 21080(b)(1); 15268);
- ☐ Declared Emergency (Sec. 21080(b)(3); 15269(a));
- ☐ Emergency Project (Sec. 21080(b)(4); 15269 (b)(c))
- ☒ Categorical Exemption: 15301 (a) and (d) [Existing Facilities], 15302 (c) [Replacement or Reconstruction], and 15304 [Minor Alterations to Land]

Reasons why project is exempt: The City of San Diego conducted an environmental review which determined that the project meets the categorical exemption criteria set forth in CEQA State Guidelines, Section 15301 (a) and (d) [Existing Facilities], which allows for the repair, maintenance, or minor alteration of existing public structures, involving negligible or no expansion of use; Section 15302 (c) [Replacement or Reconstruction], which allows for the replacement or reconstruction of existing utility systems and/or facilities involving negligible or no expansion of capacity; Section 15304 [Minor Alterations to Land], which allows for minor public alterations in the condition of land; and where the exceptions listed in Section 15300.2 would not apply.

Lead Agency Contact Person: Gretchen Eichar

Telephone: (619) 533-4110


If filed by applicant:

1. Attach certified document of exemption finding.
2. Has a notice of exemption been filed by the public agency approving the project? ☐ Yes ☐ No

It is hereby certified that the City of San Diego has determined the above activity to be exempt from CEQA



Carrie Purcell, Assistant Deputy Director



Date

Check One:

- ☒ (X) Signed By Lead Agency
☐ () Signed by Applicant

Date Received for Filing with County Clerk or OPR:

APPENDIX B

FIRE HYDRANT METER PROGRAM

CITY OF SAN DIEGO CALIFORNIA DEPARTMENT INSTRUCTIONS	NUMBER DI 55.27	DEPARTMENT Water Department
SUBJECT FIRE HYDRANT METER PROGRAM (FORMERLY: CONSTRUCTION METER PROGRAM)	PAGE 1 OF 10	EFFECTIVE DATE October 15, 2002
	SUPERSEDES DI 55.27	DATED April 21, 2000

1. **PURPOSE**

- 1.1 To establish a Departmental policy and procedure for issuance, proper usage and charges for fire hydrant meters.

2. **AUTHORITY**

- 2.1 All authorities and references shall be current versions and revisions.
- 2.2 San Diego Municipal Code (NC) Chapter VI, Article 7, Sections 67.14 and 67.15
- 2.3 Code of Federal Regulations, Safe Drinking Water Act of 1986
- 2.4 California Code of Regulations, Titles 17 and 22
- 2.5 California State Penal Code, Section 498B.0
- 2.6 State of California Water Code, Section 110, 500-6, and 520-23
- 2.7 Water Department Director

Reference

- 2.8 State of California Guidance Manual for Cross Connection Programs
- 2.9 American Water Works Association Manual M-14, Recommended Practice for Backflow Prevention
- 2.10 American Water Works Association Standards for Water Meters
- 2.11 U.S.C. Foundation for Cross Connection Control and Hydraulic Research Manual

3. **DEFINITIONS**

- 3.1 **Fire Hydrant Meter:** A portable water meter which is connected to a fire hydrant for the purpose of temporary use. (These meters are sometimes referred to as Construction Meters.)

CITY OF SAN DIEGO CALIFORNIA DEPARTMENT INSTRUCTIONS	NUMBER DI 55.27	DEPARTMENT Water Department
SUBJECT FIRE HYDRANT METER PROGRAM (FORMERLY: CONSTRUCTION METER PROGRAM)	PAGE 2 OF 10	EFFECTIVE DATE October 15, 2002
	SUPERSEDES DI 55.27	DATED April 21, 2000

3.2 **Temporary Water Use:** Water provided to the customer for no longer than twelve (12) months.

3.3 **Backflow Preventor:** A Reduced Pressure Principal Assembly connected to the outlet side of a Fire Hydrant Meter.

4. **POLICY**

4.1 The Water Department shall collect a deposit from every customer requiring a fire hydrant meter and appurtenances prior to providing the meter and appurtenances (see Section 7.1 regarding the Fees and Deposit Schedule). The deposit is refundable upon the termination of use and return of equipment and appurtenances in good working condition.

4.2 Fire hydrant meters will have a 2 ½" swivel connection between the meter and fire hydrant. The meter shall not be connected to the 4" port on the hydrant. All Fire Hydrant Meters issued shall have a Reduced Pressure Principle Assembly (RP) as part of the installation. Spanner wrenches are the only tool allowed to turn on water at the fire hydrant.

4.3 The use of private hydrant meters on City hydrants is prohibited, with exceptions as noted below. All private fire hydrant meters are to be phased out of the City of San Diego. All customers who wish to continue to use their own fire hydrant meters must adhere to the following conditions:

a. Meters shall meet all City specifications and American Water Works Association (AWWA) standards.

b. Customers currently using private fire hydrant meters in the City of San Diego water system will be allowed to continue using the meter under the following conditions:

1. The customer must submit a current certificate of accuracy and calibration results for private meters and private backflows annually to the City of San Diego, Water Department, Meter Shop.

CITY OF SAN DIEGO CALIFORNIA DEPARTMENT INSTRUCTIONS	NUMBER DI 55.27	DEPARTMENT Water Department
SUBJECT FIRE HYDRANT METER PROGRAM (FORMERLY: CONSTRUCTION METER PROGRAM)	PAGE 3 OF 10	EFFECTIVE DATE October 15, 2002
	SUPERSEDES DI 55.27	DATED April 21, 2000

2. The meter must be properly identifiable with a clearly labeled serial number on the body of the fire hydrant meter. The serial number shall be plainly stamped on the register lid and the main casing. Serial numbers shall be visible from the top of the meter casing and the numbers shall be stamped on the top of the inlet casing flange.
3. All meters shall be locked to the fire hydrant by the Water Department, Meter Section (see Section 4.7).
4. All meters shall be read by the Water Department, Meter Section (see Section 4.7).
5. All meters shall be relocated by the Water Department, Meter Section (see Section 4.7).
6. These meters shall be tested on the anniversary of the original test date and proof of testing will be submitted to the Water Department, Meter Shop, on a yearly basis. If not tested, the meter will not be allowed for use in the City of San Diego.
7. All private fire hydrant meters shall have backflow devices attached when installed.
8. The customer must maintain and repair their own private meters and private backflows.
9. The customer must provide current test and calibration results to the Water Department, Meter Shop after any repairs.
10. When private meters are damaged beyond repair, these private meters will be replaced by City owned fire hydrant meters.

CITY OF SAN DIEGO CALIFORNIA DEPARTMENT INSTRUCTIONS	NUMBER DI 55.27	DEPARTMENT Water Department
SUBJECT FIRE HYDRANT METER PROGRAM (FORMERLY: CONSTRUCTION METER PROGRAM)	PAGE 4 OF 10	EFFECTIVE DATE October 15, 2002
	SUPERSEDES DI 55.27	DATED April 21, 2000

11. When a private meter malfunctions, the customer will be notified and the meter will be removed by the City and returned to the customer for repairs. Testing and calibration results shall be given to the City prior to any re-installation.
12. The register shall be hermetically sealed straight reading and shall be readable from the inlet side. Registration shall be in hundred cubic feet.
13. The outlet shall have a 2 ½ "National Standards Tested (NST) fire hydrant male coupling.
14. Private fire hydrant meters shall not be transferable from one contracting company to another (i.e. if a company goes out of business or is bought out by another company).

4.4 All fire hydrant meters and appurtenances shall be installed, relocated and removed by the City of San Diego, Water Department. All City owned fire hydrant meters and appurtenances shall be maintained by the City of San Diego, Water Department, Meter Services.

4.5 If any fire hydrant meter is used in violation of this Department Instruction, the violation will be reported to the Code Compliance Section for investigation and appropriate action. Any customer using a fire hydrant meter in violation of the requirements set forth above is subject to fines or penalties pursuant to the Municipal Code, Section 67.15 and Section 67.37.

4.6 **Conditions and Processes for Issuance of a Fire Hydrant Meter**

Process for Issuance

- a. Fire hydrant meters shall only be used for the following purposes:
 1. Temporary irrigation purposes not to exceed one year.

CITY OF SAN DIEGO CALIFORNIA DEPARTMENT INSTRUCTIONS	NUMBER DI 55.27	DEPARTMENT Water Department
SUBJECT FIRE HYDRANT METER PROGRAM (FORMERLY: CONSTRUCTION METER PROGRAM)	PAGE 5 OF 10	EFFECTIVE DATE October 15, 2002
	SUPERSEDES DI 55.27	DATED April 21, 2000

2. Construction and maintenance related activities (see Tab 2).

- b. No customer inside or outside the boundaries of the City of San Diego Water Department shall resell any portion of the water delivered through a fire hydrant by the City of San Diego Water Department.
- c. The City of San Diego allows for the issuance of a temporary fire hydrant meter for a period not to exceed 12 months (365 days). An extension can only be granted in writing from the Water Department Director for up to 90 additional days. A written request for an extension by the consumer must be submitted at least 30 days prior to the 12 month period ending. No extension shall be granted to any customer with a delinquent account with the Water Department. No further extensions shall be granted.
- d. Any customer requesting the issuance of a fire hydrant meter shall file an application with the Meter Section. The customer must complete a "Fire Hydrant Meter Application" (Tab 1) which includes the name of the company, the party responsible for payment, Social Security number and/or California ID, requested location of the meter (a detailed map signifying an exact location), local contact person, local phone number, a contractor's license (or a business license), description of specific water use, duration of use at the site and full name and address of the person responsible for payment.
- e. At the time of the application the customer will pay their fees according to the schedule set forth in the Rate Book of Fees and Charges, located in the City Clerk's Office. All fees must be paid by check, money order or cashiers check, made payable to the City Treasurer. Cash will not be accepted.
- f. No fire hydrant meters shall be furnished or relocated for any customer with a delinquent account with the Water Department.
- g. After the fees have been paid and an account has been created, the

CITY OF SAN DIEGO CALIFORNIA DEPARTMENT INSTRUCTIONS	NUMBER DI 55.27	DEPARTMENT Water Department
SUBJECT FIRE HYDRANT METER PROGRAM (FORMERLY: CONSTRUCTION METER PROGRAM)	PAGE 6 OF 10	EFFECTIVE DATE October 15, 2002
	SUPERSEDES DI 55.27	DATED April 21, 2000

meter shall be installed within 48 hours (by the second business day). For an additional fee, at overtime rates, meters can be installed within 24 hours (within one business day).

4.7 Relocation of Existing Fire Hydrant Meters

- a. The customer shall call the Fire Hydrant Meter Hotline (herein referred to as “Hotline”), a minimum of 24 hours in advance, to request the relocation of a meter. A fee will be charged to the existing account, which must be current before a work order is generated for the meter’s relocation.
- b. The customer will supply in writing the address where the meter is to be relocated (map page, cross street, etc). The customer must update the original Fire Hydrant Meter Application with any changes as it applies to the new location.
- c. Fire hydrant meters shall be read on a monthly basis. While fire hydrant meters and backflow devices are in service, commodity, base fee and damage charges, if applicable, will be billed to the customer on a monthly basis. If the account becomes delinquent, the meter will be removed.

4.8 Disconnection of Fire Hydrant Meter

- a. After ten (10) months a “Notice of Discontinuation of Service” (Tab 3) will be issued to the site and the address of record to notify the customer of the date of discontinuance of service. An extension can only be granted in writing from the Water Department Director for up to 90 additional days (as stated in Section 4.6C) and a copy of the extension shall be forwarded to the Meter Shop Supervisor. If an extension has not been approved, the meter will be removed after twelve (12) months of use.
- b. Upon completion of the project the customer will notify the Meter Services office via the Hotline to request the removal of the fire hydrant meter and appurtenances. A work order will be generated

CITY OF SAN DIEGO CALIFORNIA DEPARTMENT INSTRUCTIONS	NUMBER DI 55.27	DEPARTMENT Water Department
SUBJECT FIRE HYDRANT METER PROGRAM (FORMERLY: CONSTRUCTION METER PROGRAM)	PAGE 7 OF 10	EFFECTIVE DATE October 15, 2002
	SUPERSEDES DI 55.27	DATED April 21, 2000

for removal of the meter.

- c. Meter Section staff will remove the meter and backflow prevention assembly and return it to the Meter Shop. Once returned to the Meter Shop the meter and backflow will be tested for accuracy and functionality.
- d. Meter Section Staff will contact and notify Customer Services of the final read and any charges resulting from damages to the meter and backflow or its appurtenance. These charges will be added on the customer's final bill and will be sent to the address of record. Any customer who has an outstanding balance will not receive additional meters.
- e. Outstanding balances due may be deducted from deposits and any balances refunded to the customer. Any outstanding balances will be turned over to the City Treasurer for collection. Outstanding balances may also be transferred to any other existing accounts.

5. **EXCEPTIONS**

- 5.1 Any request for exceptions to this policy shall be presented, in writing, to the Customer Support Deputy Director, or his/her designee for consideration.

6. **MOBILE METER**

- 6.1 Mobile meters will be allowed on a case by case basis. All mobile meters will be protected by an approved backflow assembly and the minimum requirement will be a Reduced Pressure Principal Assembly. The two types of Mobile Meters are vehicle mounted and floating meters. Each style of meters has separate guidelines that shall be followed for the customer to retain service and are described below:
 - a) **Vehicle Mounted Meters:** Customer applies for and receives a City owned Fire Hydrant Meter from the Meter Shop. The customer mounts the meter on the vehicle and brings it to the Meter Shop for

CITY OF SAN DIEGO CALIFORNIA DEPARTMENT INSTRUCTIONS	NUMBER DI 55.27	DEPARTMENT Water Department
SUBJECT FIRE HYDRANT METER PROGRAM (FORMERLY: CONSTRUCTION METER PROGRAM)	PAGE 8 OF 10	EFFECTIVE DATE October 15, 2002
	SUPERSEDES DI 55.27	DATED April 21, 2000

inspection. After installation is approved by the Meter Shop the vehicle and meter shall be brought to the Meter Shop on a monthly basis for meter reading and on a quarterly basis for testing of the backflow assembly. Meters mounted at the owner's expense shall have the one year contract expiration waived and shall have meter or backflow changed if either fails.

- b) **Floating Meters:** Floating Meters are meters that are not mounted to a vehicle. **(Note: All floating meters shall have an approved backflow assembly attached.)** The customer shall submit an application and a letter explaining the need for a floating meter to the Meter Shop. The Fire Hydrant Meter Administrator, after a thorough review of the needs of the customer, (i.e. number of jobsites per day, City contract work, lack of mounting area on work vehicle, etc.), may issue a floating meter. At the time of issue, it will be necessary for the customer to complete and sign the "Floating Fire Hydrant Meter Agreement" which states the following:

- 1) The meter will be brought to the Meter Shop at 2797 Caminito Chollas, San Diego on the third week of each month for the monthly read by Meter Shop personnel.
- 2) Every other month the meter will be read and the backflow will be tested. This date will be determined by the start date of the agreement.

If any of the conditions stated above are not met the Meter Shop has the right to cancel the contract for floating meter use and close the account associated with the meter. The Meter Shop will also exercise the right to refuse the issuance of another floating meter to the company in question.

Any Fire Hydrant Meter using reclaimed water shall not be allowed use again with any potable water supply. The customer shall incur the cost of replacing the meter and backflow device in this instance.

CITY OF SAN DIEGO CALIFORNIA DEPARTMENT INSTRUCTIONS	NUMBER DI 55.27	DEPARTMENT Water Department
SUBJECT FIRE HYDRANT METER PROGRAM (FORMERLY: CONSTRUCTION METER PROGRAM)	PAGE 9 OF 10	EFFECTIVE DATE October 15, 2002
	SUPERSEDES DI 55.27	DATED April 21, 2000

7. **FEE AND DEPOSIT SCHEDULES**

- 7.1 **Fees and Deposit Schedules:** The fees and deposits, as listed in the Rate Book of Fees and Charges, on file with the Office of the City Clerk, are based on actual reimbursement of costs of services performed, equipment and materials. These deposits and fees will be amended, as needed, based on actual costs. Deposits, will be refunded at the end of the use of the fire hydrant meter, upon return of equipment in good working condition and all outstanding balances on account are paid. Deposits can also be used to cover outstanding balances.

All fees for equipment, installation, testing, relocation and other costs related to this program are subject to change without prior notification. The Mayor and Council will be notified of any future changes.

8. **UNAUTHORIZED USE OF WATER FROM A HYDRANT**

- 8.1 Use of water from any fire hydrant without a properly issued and installed fire hydrant meter is theft of City property. Customers who use water for unauthorized purposes or without a City of San Diego issued meter will be prosecuted.
- 8.2 If any unauthorized connection, disconnection or relocation of a fire hydrant meter, or other connection device is made by anyone other than authorized Water Department personnel, the person making the connection will be prosecuted for a violation of San Diego Municipal Code, Section 67.15. In the case of a second offense, the customer's fire hydrant meter shall be confiscated and/or the deposit will be forfeited.
- 8.3 Unauthorized water use shall be billed to the responsible party. Water use charges shall be based on meter readings, or estimates when meter readings are not available.
- 8.4 In case of unauthorized water use, the customer shall be billed for all applicable charges as if proper authorization for the water use had been obtained, including but not limited to bi-monthly service charges, installation charges and removal charges.

CITY OF SAN DIEGO CALIFORNIA DEPARTMENT INSTRUCTIONS	NUMBER DI 55.27	DEPARTMENT Water Department
SUBJECT FIRE HYDRANT METER PROGRAM (FORMERLY: CONSTRUCTION METER PROGRAM)	PAGE 10 OF 10	EFFECTIVE DATE October 15, 2002
	SUPERSEDES DI 55.27	DATED April 21, 2000

- 8.5 If damage occurs to Water Department property (i.e. fire hydrant meter, backflow, various appurtenances), the cost of repairs or replacements will be charged to the customer of record (applicant).

Water Department Director

- Tabs: 1. Fire Hydrant Meter Application
2. Construction & Maintenance Related Activities With No Return To Sewer
3. Notice of Discontinuation of Service

APPENDIX

Administering Division: Customer Support Division

Subject Index: Construction Meters
Fire Hydrant
Fire Hydrant Meter Program
Meters, Floating or Vehicle Mounted
Mobile Meter
Program, Fire Hydrant Meter

Distribution: DI Manual Holders



Application for Fire Hydrant Meter (EXHIBIT A)

(For Office Use Only)

NS REQ	FAC#
DATE	BY

METER SHOP (619) 527-7449

Meter Information

Application Date	Requested Install Date:
------------------	-------------------------

Fire Hydrant Location: (Attach Detailed Map//Thomas Bros. Map Location or Construction drawing.) <u>Zip:</u>	<u>T.B.</u>	<u>G.B. (CITY USE)</u>
Specific Use of Water:		
Any Return to Sewer or Storm Drain, If so, explain:		
Estimated Duration of Meter Use: <input type="text"/>	<input type="checkbox"/>	Check Box if Reclaimed Water

Company Information

Company Name:			
Mailing Address:			
City:	State:	Zip:	Phone: ()
*Business license#		*Contractor license#	
A Copy of the Contractor's license OR Business License is required at the time of meter issuance.			
Name and Title of Billing Agent: (PERSON IN ACCOUNTS PAYABLE)			Phone: ()
Site Contact Name and Title:			Phone: ()
Responsible Party Name:			Title:
Cal ID#			Phone: ()
Signature:		Date:	
Guarantees Payment of all Charges Resulting from the use of this Meter. Insures that employees of this Organization understand the proper use of Fire Hydrant Meter			

Fire Hydrant Meter Removal Request		Requested Removal Date:
Provide Current Meter Location if Different from Above:		
Signature:	Title:	Date:
Phone: ()	Pager: ()	

<input type="checkbox"/> City Meter	<input type="checkbox"/> Private Meter
Contract Acct #:	Deposit Amount: \$ 936.00 Fees Amount: \$ 62.00
Meter Serial #	Meter Size: 05 Meter Make and Style: 6-7
Backflow #	Backflow Size: Backflow Make and Style:
Name:	Signature: Date:

WATER USES WITHOUT ANTICIPATED CHARGES FOR RETURN TO SEWER

Auto Detailing
Backfilling
Combination Cleaners (Vactors)
Compaction
Concrete Cutters
Construction Trailers
Cross Connection Testing
Dust Control
Flushing Water Mains
Hydro Blasting
Hydro Seeing
Irrigation (for establishing irrigation only; not continuing irrigation)
Mixing Concrete
Mobile Car Washing
Special Events
Street Sweeping
Water Tanks
Water Trucks
Window Washing

Note:

1. If there is any return to sewer or storm drain, then sewer and/or storm drain fees will be charges.

Date

Name of Responsible Party

Company Name and Address

Account Number: _____

Subject: Discontinuation of Fire Hydrant Meter Service

Dear Water Department Customer:

The authorization for use of Fire Hydrant Meter # _____, located at *(Meter Location Address)* ends in 60 days and will be removed on or after *(Date Authorization Expires)*. Extension requests for an additional 90 days must be submitted in writing for consideration 30 days prior to the discontinuation date. If you require an extension, please contact the Water Department, or mail your request for an extension to:

City of San Diego
Water Department
Attention: Meter Services
2797 Caminito Chollas
San Diego, CA 92105-5097

Should you have any questions regarding this matter, please call the Fire Hydrant Hotline at (619) _____ - _____.

Sincerely,

Water Department

APPENDIX C

MATERIALS TYPICALLY ACCEPTED BY CERTIFICATE OF COMPLIANCE

MATERIALS TYPICALLY ACCEPTED BY CERTIFICATE OF COMPLIANCE

1. Soil amendment
2. Fiber mulch
3. PVC or PE pipe up to 16 inch diameter
4. Stabilizing emulsion
5. Lime
6. Preformed elastomeric joint seal
7. Plain and fabric reinforced elastomeric bearing pads
8. Steel reinforced elastomeric bearing pads
9. Waterstops (Special Condition)
10. Epoxy coated bar reinforcement
11. Plain and reinforcing steel
12. Structural steel
13. Structural timber and lumber
14. Treated timber and lumber
15. Lumber and timber
16. Aluminum pipe and aluminum pipe arch
17. Corrugated steel pipe and corrugated steel pipe arch
18. Structural metal plate pipe arches and pipe arches
19. Perforated steel pipe
20. Aluminum underdrain pipe
21. Aluminum or steel entrance tapers, pipe downdrains, reducers, coupling bands and slip joints
22. Metal target plates
23. Paint (traffic striping)
24. Conductors
25. Painting of electrical equipment
26. Electrical components
27. Engineering fabric
28. Portland Cement
29. PCC admixtures
30. Minor concrete, asphalt
31. Asphalt (oil)
32. Liquid asphalt emulsion
33. Epoxy

APPENDIX D

SAMPLE CITY INVOICE WITH CASH FLOW FORECAST

City of San Diego, CM&FS Div., 9753 Chesapeake Drive, SD CA 92123

Project Name:

Work Order No or Job Order No.

City Purchase Order No.

Resident Engineer (RE):

RE Phone#: Fax#:

Contractor's Name:

Contractor's Address:

Contractor's Phone #:

Contractor's fax #:

Contact Name:

Invoice No.

Invoice Date:

Billing Period: (To)

Item #	Item Description	Contract Authorization				Previous Totals To Date		This Estimate		Totals to Date	
		Unit	Price	Qty	Extension	%/QTY	Amount	% / QTY	Amount	% / QTY	Amount
1					\$ -		\$ -		\$ -	0.00	\$ -
2					\$ -		\$ -		\$ -	0.00%	\$ -
3					\$ -		\$ -		\$ -	0.00%	\$ -
4					\$ -		\$ -		\$ -	0.00%	\$ -
5					\$ -		\$ -		\$ -	0.00%	\$ -
6					\$ -		\$ -		\$ -	0.00%	\$ -
7					\$ -		\$ -		\$ -	0.00%	\$ -
8					\$ -		\$ -		\$ -	0.00%	\$ -
5					\$ -		\$ -		\$ -	0.00%	\$ -
6					\$ -		\$ -		\$ -	0.00%	\$ -
7					\$ -		\$ -		\$ -	0.00%	\$ -
8					\$ -		\$ -		\$ -	0.00%	\$ -
9					\$ -		\$ -		\$ -	0.00%	\$ -
10					\$ -		\$ -		\$ -	0.00%	\$ -
11					\$ -		\$ -		\$ -	0.00%	\$ -
12					\$ -		\$ -		\$ -	0.00%	\$ -
13					\$ -		\$ -		\$ -	0.00%	\$ -
14					\$ -		\$ -		\$ -	0.00%	\$ -
15					\$ -		\$ -		\$ -	0.00%	\$ -
16					\$ -		\$ -		\$ -	0.00%	\$ -
17	Field Orders				\$ -		\$ -		\$ -	0.00%	\$ -
					\$ -		\$ -		\$ -	0.00%	\$ -
	CHANGE ORDER No.				\$ -		\$ -		\$ -	0.00%	\$ -
					\$ -		\$ -		\$ -	0.00%	\$ -
Total Authorized Amount (including approved Change Order)					\$ -		\$ -		\$ -	Total Billed	\$ -

SUMMARY

A. Original Contract Amount	\$ -
B. Approved Change Order #00 Thru #00	\$ -
C. Total Authorized Amount (A+B)	\$ -
D. Total Billed to Date	\$ -
E. Less Total Retention (5% of D)	\$ -
F. Less Total Previous Payments	\$ -
G. Payment Due Less Retention	\$0.00
H. Remaining Authorized Amount	\$0.00

I certify that the materials
have been received by me in
the quality and quantity specified

Resident Engineer

Construction Engineer

Retention and/or Escrow Payment Schedule

Total Retention Required as of this billing (Item E)	\$0.00
Previous Retention Withheld in PO or in Escrow	\$0.00
Add'l Amt to Withhold in PO/Transfer in Escrow:	\$0.00
Amt to Release to Contractor from PO/Escrow:	

Contractor Signature and Date: _____

NOTE: CONTRACTOR TO CALCULATE TO THE 2ND DECIMAL PLACE.

WBS #:	B18108
Date Submitted:	10/10/2018
NTP Date:	3/23/2018
Final Statement of WD Date:	5/23/2020
Contract #:	K-XX-XXXX-XXX-X
Contract Amount:	\$5,617,000

Construction Cash Flow Forecast

"Sewer and Water Group Job 965 (W)"

Year	January	February	March	April	May	June	July	August	September	October	November	December
2018				15,000	25,000	52,000	52,000	100,000	10,000	100,000	100,000	100,000
2019	10,000	10,000	85,000	58,000	100,000	100,000	100,000	100,000	100,000	100,000	1,000,000	1,000,000
2020	100,000	100,000	100,000	1,000,000	1,000,000							
2021												
2022												
2023												
2024												
2025												

APPENDIX E

LOCATION MAP

APPENDIX F

SAMPLE OF PUBLIC NOTICE



CONSTRUCTION NOTICE

PROJECT TITLE

Work on your street will begin within one week to replace the existing water mains servicing your community.

The work will consist of:

- Saw-cutting and trench work on Ingulf Street from Morena Boulevard to Galveston Street to install new water mains, water laterals and fire hydrants.
- Streets where trenching takes place will be resurfaced and curb ramps will be upgraded to facilitate access for persons with disabilities where required.
- This work is anticipated to be complete in your community by December 2016.

How your neighborhood may be impacted:

- Water service to some properties during construction will be provided by a two-inch highline pipe that will run along the curb. To report a highline leak call 619-515-3525.
- Temporary water service disruptions are planned. If planned disruptions impact your property, you will receive advance notice.
- Parking restrictions will exist because of the presence of construction equipment and materials.
- "No Parking" signs will be displayed 72 hours in advance of the work.
- Cars parked in violation of signs will be TOWED.

Hours and Days of Operation:

Monday through Friday X:XX AM to X:XX PM.

City of San Diego Contractor:

Company Name, XXX-XXX-XXXX



CONSTRUCTION NOTICE

PROJECT TITLE

Work on your street will begin within one week to replace the existing water mains servicing your community.

The work will consist of:

- Saw-cutting and trench work on Ingulf Street from Morena Boulevard to Galveston Street to install new water mains, water laterals and fire hydrants.
- Streets where trenching takes place will be resurfaced and curb ramps will be upgraded to facilitate access for persons with disabilities where required.
- This work is anticipated to be complete in your community by December 2016.

How your neighborhood may be impacted:

- Water service to some properties during construction will be provided by a two-inch highline pipe that will run along the curb. To report a highline leak call 619-515-3525.
- Temporary water service disruptions are planned. If planned disruptions impact your property, you will receive advance notice.
- Parking restrictions will exist because of the presence of construction equipment and materials.
- "No Parking" signs will be displayed 72 hours in advance of the work.
- Cars parked in violation of signs will be TOWED.

Hours and Days of Operation:

Monday through Friday X:XX AM to X:XX PM.

City of San Diego Contractor:

Company Name, XXX-XXX-XXXX

ATTACHMENT F

RESERVED

ATTACHMENT G
CONTRACT AGREEMENT

CONTRACT AGREEMENT

CONSTRUCTION CONTRACT

This contract is made and entered into between THE CITY OF SAN DIEGO, a municipal corporation, herein called "City", and _____, herein called "Contractor" for construction of **City Heights Pool Reconstruction**; Bid No. **K-20-1888-DBB-3-A**; in the amount of _____ (\$ _____), which is comprised of the Base Bid, consisting of an amount not to exceed \$_____.

IN CONSIDERATION of the payments to be made hereunder and the mutual undertakings of the parties hereto, City and Contractor agree as follows:

1. The following are incorporated into this contract as though fully set forth herein:
 - (a) The attached Faithful Performance and Payment Bonds.
 - (b) The attached Proposal included in the Bid documents by the Contractor.
 - (c) Reference Standards listed in the Instruction to Bidders and the Supplementary Special Provisions (SSP).
 - (d) That certain documents entitled **City Heights Pool Reconstruction**, on file in the office of the Public Works Department as Document No. **B-19068**, as well as all matters referenced therein.
2. The Contractor shall perform and be bound by all the terms and conditions of this contract and in strict conformity therewith shall perform and complete in a good and workmanlike manner **City Heights Pool Reconstruction**, Bid Number **K-20-1888-DBB-3-A**, San Diego, California.
3. For such performances, the City shall pay to Contractor the amounts set forth at the times and in the manner and with such additions or deductions as are provided for in this contract, and the Contractor shall accept such payment in full satisfaction of all claims incident to such performances.
4. No claim or suit whatsoever shall be made or brought by Contractor against any officer, agent, or employee of the City for or on account of anything done or omitted to be done in connection with this contract, nor shall any such officer, agent, or employee be liable hereunder.
5. This contract is effective as of the date that the Mayor or designee signs the agreement and is approved by the City Attorney in accordance with San Diego Charter Section 40.

CONTRACT AGREEMENT (continued)

IN WITNESS WHEREOF, this Agreement is signed by the City of San Diego, acting by and through its Mayor or designee, pursuant to Resolution No. R - _____ or Municipal Code _____ authorizing such execution.

THE CITY OF SAN DIEGO

APPROVED AS TO FORM

Mara W. Elliott, City Attorney

By _____

By _____

Print Name: _____
Mayor or designee

Print Name: _____
Deputy City Attorney

Date: _____

Date: _____

CONTRACTOR

By _____

Print Name: _____

Title: _____

Date: _____

City of San Diego License No.: _____

State Contractor's License No.: _____

DEPARTMENT OF INDUSTRIAL RELATIONS (DIR) REGISTRATION NUMBER: _____

CERTIFICATIONS AND FORMS

The Bidder, by submitting its electronic bid, agrees to and certifies under penalty of perjury under the laws of the State of California, that the certifications, forms and affidavits submitted as part of this bid are true and correct.

BIDDER'S GENERAL INFORMATION

To the City of San Diego:

Pursuant to "Notice Inviting Bids", specifications, and requirements on file with the City Clerk, and subject to all provisions of the Charter and Ordinances of the City of San Diego and applicable laws and regulations of the United States and the State of California, the undersigned hereby proposes to furnish to the City of San Diego, complete at the prices stated herein, the items or services hereinafter mentioned. The undersigned further warrants that this bid is not made in the interest of, or on behalf of, any undisclosed person, partnership, company, association, organization, or corporation; that the bid is genuine and not collusive or sham; that the bidder has not directly or indirectly induced or solicited any other bidder to put in a false or sham bid, and has not directly or indirectly colluded, conspired, connived, or agreed with any bidder or anyone else to put in a sham bid, or that anyone shall refrain from bidding; that the bidder has not in any manner, directly or indirectly, sought by agreement, communication, or conference with anyone to fix the bid price of the bidder or any other bidder, or to fix any overhead, profit, or cost element of the bid price, or of that of any other bidder, or to secure any advantage against the public body awarding the contract of anyone interested in the proposed contract; that all statements contained in the bid are true; and, further, that the bidder has not, directly or indirectly, submitted his or her bid price or any breakdown thereof, or the contents thereof, or divulged information or data relative thereto, or paid, and will not pay, any fee to any corporation, partnership, company, association, organization, bid depository, or to any member or agent thereof to effectuate a collusive or sham bid.

The undersigned bidder(s) further warrants that bidder(s) has thoroughly examined and understands the entire Contract Documents (plans and specifications) and the Bidding Documents therefore, and that by submitting said Bidding Documents as its bid proposal, bidder(s) acknowledges and is bound by the entire Contract Documents, including any addenda issued thereto, as such Contract Documents incorporated by reference in the Bidding Documents.

**NON-COLLUSION AFFIDAVIT TO BE EXECUTED BY BIDDER AND SUBMITTED WITH BID UNDER 23
UNITED STATES CODE 112 AND PUBLIC CONTRACT CODE 7106**

State of California

County of San Diego

The bidder, being first duly sworn, deposes and says that he or she is authorized by the party making the foregoing bid that the bid is not made in the interest of, or on behalf of, any undisclosed person, partnership, company, association, organization, or corporation; that the bid is genuine and not collusive or sham; that the bidder has not directly or indirectly induced or solicited any other bidder to put in a false or sham bid, and has not directly or indirectly colluded, conspired, connived, or agreed with any bidder or anyone else to put in a sham bid, or that anyone shall refrain from bidding; that the bidder has not in any manner, directly or indirectly, sought by agreement, communication, or conference with anyone to fix the bid price of the bidder or any other bidder, or to fix any overhead, profit, or cost element of the bid price, or of that of any other bidder, or to secure any advantage against the public body awarding the contract of anyone interested in the proposed contract; that all statements contained in the bid are true; and further, that the bidder has not, directly or indirectly, submitted his or her bid price or any breakdown thereof, or the contents thereof, or divulged information or data relative thereto, or paid, and will not pay, any fee to any corporation, partnership, company association, organization, bid depository, or to any member or agent thereof to effectuate a collusive or sham bid.

CONTRACTOR CERTIFICATION

DRUG-FREE WORKPLACE

I hereby certify that I am familiar with the requirements of San Diego City Council Policy No. 100-17 regarding Drug-Free Workplace as outlined in the WHITEBOOK, Section 5-1.3, "Drug-Free Workplace", of the project specifications, and that;

This company has in place a drug-free workplace program that complies with said policy. I further certify that each subcontract agreement for this project contains language which indicates the subcontractor's agreement to abide by the provisions of subdivisions a) through c) of the policy as outlined.

CONTRACTOR CERTIFICATION

AMERICANS WITH DISABILITIES ACT (ADA) COMPLIANCE CERTIFICATION

I hereby certify that I am familiar with the requirements of San Diego City Council Policy No. 100-4 regarding the Americans With Disabilities Act (ADA) outlined in the WHITEBOOK, Section 5-1.2, "California Building Code, California Code of Regulations Title 24 and Americans with Disabilities Act", of the project specifications, and that:

This company has in place workplace program that complies with said policy. I further certify that each subcontract agreement for this project contains language which indicates the subcontractor's agreement to abide by the provisions of the policy as outlined.

CONTRACTOR CERTIFICATION

CONTRACTOR STANDARDS – PLEDGE OF COMPLIANCE

I declare under penalty of perjury that I am authorized to make this certification on behalf of the company submitting this bid/proposal, that as Contractor, I am familiar with the requirements of City of San Diego Municipal Code § 22.3004 regarding Contractor Standards as outlined in the WHITEBOOK, Section 5-1.4, ("Contractor Standards and Pledge of Compliance"), of the project specifications, and that Contractor has complied with those requirements.

I further certify that each of the Contractor's subcontractors has completed a Pledge of Compliance attesting under penalty of perjury of having complied with City of San Diego Municipal Code § 22.3004.

CONTRACTOR CERTIFICATION

EQUAL BENEFITS ORDINANCE CERTIFICATION

I declare under penalty of perjury that I am familiar with the requirements of and in compliance with the City of San Diego Municipal Code § 22.4300 regarding Equal Benefits Ordinance.

CONTRACTOR CERTIFICATION

EQUAL PAY ORDINANCE CERTIFICATION

Contractor shall comply with the Equal Pay Ordinance (EPO) codified in the San Diego Municipal Code (SDMC) at section 22.4801 through 22.4809, unless compliance is not required based on an exception listed in SDMC section 22.4804.

Contractor shall require all of its subcontractors to certify compliance with the EPO in their written subcontracts.

Contractor must post a notice informing its employees of their rights under the EPO in the workplace or job site.

By signing this Contract with the City of San Diego, Contractor acknowledges the EPO requirements and pledges ongoing compliance with the requirements of SDMC Division 48, section 22.4801 et seq., throughout the duration of this Contract.

AFFIDAVIT OF DISPOSAL

(To be submitted upon completion of Construction pursuant to the contracts Certificate of Completion)

WHEREAS, on the _____ DAY OF _____, 2____ the undersigned entered into and executed a contract with the City of San Diego, a municipal corporation, for:

City Heights Pool Reconstruction

(Project Title)

as particularly described in said contract and identified as Bid No. **K-20-1888-DBB-3-A**; SAP No. (WBS) **B-19068**; and **WHEREAS**, the specification of said contract requires the Contractor to affirm that "all brush, trash, debris, and surplus materials resulting from this project have been disposed of in a legal manner"; and **WHEREAS**, said contract has been completed and all surplus materials disposed of:

NOW, THEREFORE, in consideration of the final payment by the City of San Diego to said Contractor under the terms of said contract, the undersigned Contractor, does hereby affirm that all surplus materials as described in said contract have been disposed of at the following location(s)

and that they have been disposed of according to all applicable laws and regulations.

Dated this _____ DAY OF _____, _____.

By: _____
Contractor

ATTEST:

State of _____ County of _____

On this _____ DAY OF _____, 2____, before the undersigned, a Notary Public in and for said County and State, duly commissioned and sworn, personally appeared _____ known to me to be the _____ Contractor named in the foregoing Release, and whose name is subscribed thereto, and acknowledged to me that said Contractor executed the said Release.

Notary Public in and for said County and State

LIST OF SUBCONTRACTORS

***** PROVIDED FOR ILLUSTRATIVE PURPOSES ONLY *** TO BE SUBMITTED IN ELECTRONIC FORMAT ONLY *** SEE INSTRUCTIONS TO BIDDERS, FOR FURTHER INFORMATION**

In accordance with the requirements of the "Subletting and Subcontracting Fair Practices Act", Section 4100, of the California Public Contract Code (PCC), the Bidder is to list below the name, address and license number of each Subcontractor who will perform work, labor, render services or specially fabricate and install a portion [type] of the work or improvement, in an amount of or in excess of 0.5% of the Contractor's total Bid. Failure to comply with this requirement may result in the Bid being rejected as non-responsive. The Contractor is to list only one Subcontractor for each portion of the Work. The Bidder's attention is directed to the Special Provisions - Section 3-2, "SELF-PERFORMANCE", which stipulates the percentage of the Work to be performed with the Bidder's own forces. The Bidder is to also list all SLBE, ELBE, DBE, DVBE, MBE, WBE, OBE, SDB, WoSB, HUBZone, and SDVOSB Subcontractors for which the Bidders are seeking recognition towards achieving any mandatory, voluntary, or both subcontracting participation percentages.

NAME, ADDRESS AND TELEPHONE NUMBER OF SUBCONTRACTOR	CONSTRUCTOR OR DESIGNER	SUBCONTRACTOR LICENSE NUMBER	TYPE OF WORK	DOLLAR VALUE OF SUBCONTRACT	MBE, WBE, DBE, DVBE, OBE, ELBE, SLBE, SDB, WoSB, HUBZone, OR SDVOSB ^①	WHERE CERTIFIED ^②	CHECK IF JOINT VENTURE PARTNERSHIP
Name: _____ Address: _____ City: _____ State: _____ Zip: _____ Phone: _____ Email: _____							
Name: _____ Address: _____ City: _____ State: _____ Zip: _____ Phone: _____ Email: _____							

① As appropriate, Bidder shall identify Subcontractor as one of the following and shall include a valid proof of certification (except for OBE, SLBE and ELBE):

Certified Minority Business Enterprise	MBE	Certified Woman Business Enterprise	WBE
Certified Disadvantaged Business Enterprise	DBE	Certified Disabled Veteran Business Enterprise	DVBE
Other Business Enterprise	OBE	Certified Emerging Local Business Enterprise	ELBE
Certified Small Local Business Enterprise	SLBE	Small Disadvantaged Business	SDB
Woman-Owned Small Business	WoSB	HUBZone Business	HUBZone
Service-Disabled Veteran Owned Small Business	SDVOSB		

② As appropriate, Bidder shall indicate if Subcontractor is certified by:

City of San Diego	CITY	State of California Department of Transportation	CALTRANS
California Public Utilities Commission	CPUC		
State of California's Department of General Services	CADoGS	City of Los Angeles	LA
State of California	CA	U.S. Small Business Administration	SBA

The Bidder will not receive any subcontracting participation percentages if the Bidder fails to submit the required proof of certification.

NAMED EQUIPMENT/MATERIAL SUPPLIER LIST

***** PROVIDED FOR ILLUSTRATIVE PURPOSES ONLY *** TO BE SUBMITTED IN ELECTRONIC FORMAT ONLY *** SEE INSTRUCTIONS TO BIDDERS FOR FURTHER INFORMATION**

NAME, ADDRESS AND TELEPHONE NUMBER OF SUBCONTRACTOR	CONSTRUCTOR OR DESIGNER	SUBCONTRACTOR LICENSE NUMBER	TYPE OF WORK	DOLLAR VALUE OF SUBCONTRACT	MBE, WBE, DBE, DVBE, OBE, ELBE, SLBE, SDB, WoSB, HUBZone, OR SDVOSB①	WHERE CERTIFIED②	CHECK IF JOINT VENTURE PARTNERSHIP
Name: _____ Address: _____ City: _____ State: _____ Zip: _____ Phone: _____ Email: _____							
Name: _____ Address: _____ City: _____ State: _____ Zip: _____ Phone: _____ Email: _____							

- ① As appropriate, Bidder shall identify Vendor/Supplier as one of the following and shall include a valid proof of certification (except for OBE, SLBE and ELBE):
- | | | | |
|---|--------|--|---------|
| Certified Minority Business Enterprise | MBE | Certified Woman Business Enterprise | WBE |
| Certified Disadvantaged Business Enterprise | DBE | Certified Disabled Veteran Business Enterprise | DVBE |
| Other Business Enterprise | OBE | Certified Emerging Local Business Enterprise | ELBE |
| Certified Small Local Business Enterprise | SLBE | Small Disadvantaged Business | SDB |
| Woman-Owned Small Business | WoSB | HUBZone Business | HUBZone |
| Service-Disabled Veteran Owned Small Business | SDVOSB | | |
- ② As appropriate, Bidder shall indicate if Vendor/Supplier is certified by:
- | | | | |
|--|--------|--|----------|
| City of San Diego | CITY | State of California Department of Transportation | CALTRANS |
| California Public Utilities Commission | CPUC | | |
| State of California's Department of General Services | CADoGS | City of Los Angeles | LA |
| State of California | CA | U.S. Small Business Administration | SBA |

The Bidder will not receive any subcontracting participation percentages if the Bidder fails to submit the required proof of certification.

ELECTRONICALLY SUBMITTED FORMS

FAILURE TO FULLY COMPLETE AND SUBMIT ANY OF THE FOLLOWING FORMS WILL DEEM YOUR BID NON-RESPONSIVE.

PLANETBIDS WILL NOT ALLOW FOR BID SUBMISSIONS WITHOUT THE ATTACHMENT OF THESE FORMS

The following forms are to be completed by the bidder and submitted (uploaded) electronically with the bid in PlanetBids.

- A. BID BOND – See Instructions to Bidders, Bidders Guarantee of Good Faith (Bid Security) for further instructions**
- B. CONTRACTOR’S CERTIFICATION OF PENDING ACTIONS**
- C. MANDATORY DISCLOSURE OF BUSINESS INTERESTS FORM**
- D. DEBARMENT AND SUSPENSION CERTIFICATION (PRIME CONTRACTOR)**
- E. DEBARMENT AND SUSPENSION CERTIFICATION (SUBCONTRACTORS/SUPPLIERS/MANUFACTURERS)**
- F. CERTIFICATIONS – TECHNICALS SECTION 13 11 00, SUB-SECTION 1.15**
- G. LOBBY PROHIBITION, CERTIFICATION AND DISCLOSURE**
- H. INSTRUCTIONS FOR COMPLETION OF SF-LLL, DISCLOSURE OF LOBBYING ACTIVITIES**
- I. DISCLOSURE OF LOBBYING ACTIVITIES**

BID BOND

See Instructions to Bidders, Bidder Guarantee of Good Faith (Bid Security)

KNOW ALL MEN BY THESE PRESENTS,

That _____ as Principal,
and _____ as Surety, are held
and firmly bound unto The City of San Diego hereinafter called "OWNER," in the sum
of **10% OF THE TOTAL BID AMOUNT** for the payment of which sum, well and truly to be made, we bind
ourselves, our heirs, executors, administrators, successors, and assigns, jointly and severally, firmly by these
presents.

WHEREAS, said Principal has submitted a Bid to said OWNER to perform the WORK required under the
bidding schedule(s) of the OWNER's Contract Documents entitled

NOW THEREFORE, if said Principal is awarded a contract by said OWNER and, within the time and in the
manner required in the "Notice Inviting Bids" enters into a written Agreement on the form of agreement
bound with said Contract Documents, furnishes the required certificates of insurance, and furnishes the
required Performance Bond and Payment Bond, then this obligation shall be null and void, otherwise it shall
remain in full force and effect. In the event suit is brought upon this bond by said OWNER and OWNER
prevails, said Surety shall pay all costs incurred by said OWNER in such suit, including a reasonable attorney's
fee to be fixed by the court.

SIGNED AND SEALED, this _____ day of _____, 20____

(Principal) (SEAL)

(Surety) (SEAL)

By: _____
(Signature)

By: _____
(Signature)

(SEAL AND NOTARIAL ACKNOWLEDGEMENT OF SURETY)

CONTRACTOR'S CERTIFICATION OF PENDING ACTIONS

As part of its bid or proposal (Non-Price Proposal in the case of Design-Build contracts), the Bidder shall provide to the City a list of all instances within the past 10 years where a complaint was filed or pending against the Bidder in a legal or administrative proceeding alleging that Bidder discriminated against its employees, subcontractors, vendors or suppliers, and a description of the status or resolution of that complaint, including any remedial action taken.

CHECK ONE BOX ONLY.

- ☐ The undersigned certifies that within the past 10 years the Bidder has NOT been the subject of a complaint or pending action in a legal administrative proceeding alleging that Bidder discriminated against its employees, subcontractors, vendors or suppliers.
- ☐ The undersigned certifies that within the past 10 years the Bidder has been the subject of a complaint or pending action in a legal administrative proceeding alleging that Bidder discriminated against its employees, subcontractors, vendors or suppliers. A description of the status or resolution of that complaint, including any remedial action taken and the applicable dates is as follows:

DATE OF CLAIM	LOCATION	DESCRIPTION OF CLAIM	LITIGATION (Y/N)	STATUS	RESOLUTION/REMEDIAL ACTION TAKEN

Contractor Name: _____

Certified By _____ Title _____

Name

_____ Date _____

Signature

USE ADDITIONAL FORMS AS NECESSARY

Mandatory Disclosure of Business Interests Form

BIDDER/PROPOSER INFORMATION

Legal Name		DBA	
Street Address	City	State	Zip
Contact Person, Title		Phone	Fax

Provide the name, identity, and precise nature of the interest* of all persons who are directly or indirectly involved** in this proposed transaction (SDMC § 21.0103).

* The precise nature of the interest includes:

- the percentage ownership interest in a party to the transaction,
- the percentage ownership interest in any firm, corporation, or partnership that will receive funds from the transaction,
- the value of any financial interest in the transaction,
- any contingent interest in the transaction and the value of such interest should the contingency be satisfied, and
- any philanthropic, scientific, artistic, or property interest in the transaction.

** Directly or indirectly involved means pursuing the transaction by:

- communicating or negotiating with City officers or employees,
- submitting or preparing applications, bids, proposals or other documents for purposes of contracting with the City, or
- directing or supervising the actions of persons engaged in the above activity.

Name	Title/Position
City and State of Residence	Employer (if different than Bidder/Proposer)
Interest in the transaction	

Name	Title/Position
City and State of Residence	Employer (if different than Bidder/Proposer)
Interest in the transaction	

* Use Additional Pages if Necessary *

Under penalty of perjury under the laws of the State of California, I certify that I am responsible for the completeness and accuracy of the responses contained herein, and that all information provided is true, full and complete to the best of my knowledge and belief. I agree to provide written notice to the Mayor or Designee within five (5) business days if, at any time, I learn that any portion of this Mandatory Disclosure of Business Interests Form requires an updated response. Failure to timely provide the Mayor or Designee with written notice is grounds for Contract termination.

Print Name, Title

Signature

Date

Failure to sign and submit this form with the bid/proposal shall make the bid/proposal non-responsive. In the case of an informal solicitation, the contract will not be awarded unless a signed and completed Mandatory Disclosure of Business Interests Form is submitted.

DEBARMENT AND SUSPENSION CERTIFICATION
PRIME CONTRACTOR
FAILURE TO COMPLETE AND SUBMIT AT TIME OF BID SHALL RENDER BID NON-RESPONSIVE

EFFECT OF DEBARMENT OR SUSPENSION
To promote integrity in the City's contracting processes and to protect the public interest, the City shall only enter into contracts with responsible bidders and contractors. In accordance with San Diego Municipal Code §22.0814 (a): <i>Bidders and contractors</i> who have been <i>debarred</i> or <i>suspended</i> are excluded from submitting bids, submitting responses to requests for proposal or qualifications, receiving <i>contract</i> awards, executing <i>contracts</i> , participating as a <i>subcontractor</i> , employee, agent or representative of another <i>person</i> contracting with the City.

As part of its bid or proposal (Non-Price Proposal in the case of Design-Build contracts), the Bidder shall provide to the City a list of Names of the Principal Individual owner(s)

The names of all persons interested in the foregoing proposal as Principals are as follows:

NAME	TITLE

IMPORTANT NOTICE: If Bidder or other interested person is a corporation, state secretary, treasurer, and manager thereof; if a co-partnership, state true name of firm, also names of all individual co-partners composing firm; if Bidder or other interested person is an individual, state first and last names in full.

The Bidder, under penalty of perjury, certifies that, except as noted below, he/she or any person associated therewith in the capacity of owner, partner, director, officer, manager:

- Is not currently under suspension, debarment, voluntary exclusion, or determination of ineligibility by any Federal, State or local agency;
- has not been suspended, debarred, voluntarily excluded or determined ineligible by any Federal, State or local agency within the past 3 years;
- does not have a proposed debarment pending; and
- has not been indicted, convicted, or had a civil judgment rendered against it by a court of competent jurisdiction in any matter involving fraud or official misconduct within the past 3 years.

If there are any exceptions to this certification, insert the exceptions in the following space.

Exceptions will be considered in determining bidder responsibility. For any exception noted above, indicate below to whom it applies, initiating agency, and dates of action.

Contractor Name: _____

Certified By _____ Title _____
Name

Signature Date _____

NOTE: Providing false information may result in criminal prosecution or administrative sanctions.

DEBARMENT AND SUSPENSION CERTIFICATION
SUBCONTRACTORS, SUPPLIERS AND MANUFACTURERS
TO BE COMPLETED BY BIDDER
FAILURE TO COMPLETE AND SUBMIT AT TIME OF BID SHALL RENDER BID NON-RESPONSIVE

Names of the Principal individual owner(s)

As part of its bid or proposal (Non-Price Proposal in the case of Design-Build contracts), the Bidder shall provide to the City a list of Names of the Principal Individual owner(s) for their subcontractor/supplier/manufacturers.

Please indicate if principal owner is serving in the capacity of **subcontractor**, **supplier**, and/or **manufacturer**:

☐ SUBCONTRACTOR ☐ SUPPLIER ☐ MANUFACTURER

NAME	TITLE

☐ SUBCONTRACTOR ☐ SUPPLIER ☐ MANUFACTURER

NAME	TITLE

☐ SUBCONTRACTOR ☐ SUPPLIER ☐ MANUFACTURER

NAME	TITLE

☐ SUBCONTRACTOR ☐ SUPPLIER ☐ MANUFACTURER

NAME	TITLE

Contractor Name: _____

Certified By _____ Title _____
Name

Signature Date _____

USE ADDITIONAL FORMS AS NECESSARY*

LOBBY PROHIBITION, CERTIFICATION AND DISCLOSURE

In acknowledgment that funds received under this agreement have been provided pursuant to a Federal grant, recipient hereby recognizes the prohibitions against lobbying the Federal government with any of these funds. Recipient agrees that it shall comply with the laws set forth at 31 U.S.C. § 1352 (1989) and 24 C.F.R. part 87, to wit:

A. Conditions on use of funds

Recipient shall not expend any funds received pursuant to this agreement to pay any person to influence an officer or employee of Federal agency, a member of Congress, an officer or employee of Congress, or an employee of a member of Congress in connection with any of the following Covered Federal actions:

- (1) The awarding of any federal contract
- (2) The making of any Federal grant
- (3) The making of any Federal Loan
- (4) The entering into of any cooperative agreement
- (5) The extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

For purposes of defining the terms of this part of the agreement, the definitions set forth in 24 C.F.R. § 87.105 are hereby adopted and incorporated herein by reference.

B. Certification and Disclosure

Each recipient at every tier under this agreement shall file a certification regarding lobbying, and a Disclosure Form-LLL, where required by 24 C.F.R. § 87.110. The certification form and Disclosure Form-LLL are attached to this agreement.

C. Certifications must be filed:

- (1) By any person upon each submission that initiates agency consideration for an award of a Federal contract, grant, or cooperative agreement exceeding \$100,000, or a Federal loan or loan guarantee exceeding \$150,000.
- (2) Upon receipt by any person of a Federal contract, grant, or cooperative agreement exceeding \$100,000, or upon receipt of a Federal loan or loan guarantee exceeding \$150,000.
- (3) By any person who requests or receives from a person referred to in subsections 1 and 2 of this paragraph:
 - a. A subcontract exceeding \$100,000 at any tier under a Federal contract;
 - b. A subgrant, contract or subcontract exceeding \$100,000 at any tier under a Federal grant;
 - c. A contract or subcontract exceeding \$100,000 at any tier under a Federal loan exceeding \$150,000;
 - d. A contract or subcontract exceeding \$100,000 at any tier under a Federal cooperative agreement.

D. Disclosure Forms-LLL must be filed in every instance when a person applies for, requests, or receives Federal appropriations exceeding \$100,000 pursuant to a contract, subcontract, grant, subgrant, loan, or cooperative agreement when such person has paid or expects to pay any sum, in cash or in kind, to influence or attempt to influence any officer or employee of an agency, a member of Congress, an officer or employee of Congress, or an employee of a member of Congress. Further, Disclosure Form-LLL must be filed by recipients at any tier at the end of each calendar quarter in which there occurs any event that requires disclosure or materially affects information submitted in prior disclosures. Such events include:

- (1) 1. An increase of \$25,000 in the amount paid or expected to be paid for influencing or attempting to influence a covered Federal action;
- (2) 2. A change in the person(s) influencing or attempting to influence a covered action;
- (3) 3. A change in the officer(s), employee(s), or member(s) contacted to influence a covered action.

All disclosure Forms-LLL, but not certifications, shall be forwarded from tier to tier until received by the principal recipient, which in turn will file them with the appropriate Federal agency.

INSTRUCTIONS FOR COMPLETION OF SF-LLL, DISCLOSURE OF LOBBYING ACTIVITIES

This disclosure form shall be completed by the reporting entity, whether subawardee or prime Federal recipient, at the initiation or receipt of a covered Federal action, or a material change to a previous filing, pursuant to title 31 U.S.C. section 1352. The filing of a form is required for each payment or agreement to make payment to any lobbying entity for influencing or attempting to influence an officer or employee of any agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with a covered Federal action. Use the SF-LLLA Continuation Sheet for additional information if the space on the form is inadequate. Complete all items that apply for both the initial filing and material change report. Refer to the implementing guidance published by the Office of Management and Budget for additional information.

1. Identify the type of covered Federal action for which lobbying activity is and/or has been secured to influence the outcome of a covered Federal action.
2. Identify the status of the covered Federal action.
3. Identify the appropriate classification of this report. If this is a follow up report caused by a material change to the information previously reported, enter the year and quarter in which the change occurred. Enter the date of the last previously submitted report by this reporting entity for this covered Federal action.
4. Enter the full name, address, city, State and zip code of the reporting entity. Include Congressional District, if known. Check the appropriate classification of the reporting entity that designates if it is, or expects to be, a prime or subaward recipient. Identify the tier of the subawardee, e.g., the first subawardee of the prime is the 1st tier. Subawards include but are not limited to subcontracts, subgrants and contract awards under grants.
5. If the organization filing this report in item 4 checks "Subawardee," then enter the full name, address, city, State and zip code of the prime Federal recipient. Include Congressional District, if known.
6. Enter the name of the Federal agency making the award or loan commitment. Include at least one organizational level below agency name, if known. For example, Department of Transportation, United States Coast Guard.
7. Enter the Federal program name or description for the covered Federal action (item 1). If known, enter the full Catalog of Federal Domestic Assistance (CFDA) number for grants, cooperative agreements, loans, and loan commitments.
8. Enter the most appropriate Federal identifying number available for the Federal action identified in item 1 (e.g., Request for Proposal (RFP) number; Invitation for Bid (IFB) number; grant announcement number; the contract, grant, or loan award number; the application/proposal control number assigned by the Federal agency). Include prefixes, e.g., "RFP-DE-90-001."
9. For a covered Federal action where there has been an award or loan commitment by the Federal agency, enter the Federal amount of the award/loan commitment for the prime entity identified in item 4 or 5.
10. (a) Enter the full name, address, city, State and zip code of the lobbying entity engaged by the reporting entity identified in item 4 to influence the covered Federal action.
(b) Enter the full names of the individual(s) performing services, and include full address if different from 10 (a). Enter Last Name, First Name, and Middle Initial (MI).
11. Enter the amount of compensation paid or reasonably expected to be paid by the reporting entity (item 4) to the lobbying entity (item 10). Indicate whether the payment has been made (actual) or will be made (planned). Check all boxes that apply. If this is a material change report, enter the cumulative amount of payment made or planned to be made.
12. Check the appropriate box(es). Check all boxes that apply. If payment is made through an in-kind contribution, specify the nature and value of the in-kind payment.
13. Check the appropriate box(es). Check all boxes that apply. If other, specify nature.
14. Provide a specific and detailed description of the services that the lobbyist has performed, or will be expected to perform, and the date(s) of any services rendered. Include all preparatory and related activity, not just time spent in actual contact with Federal officials. Identify the Federal official(s) or employee(s) contacted or the officer(s), employee(s), or Member(s) of Congress that were contacted.
15. Check whether or not a SF-LLLA Continuation Sheet(s) is attached.
16. The certifying official shall sign and date the form, print his/her name, title, and telephone number.

According to the Paperwork Reduction Act, as amended, no persons are required to respond to a collection of information unless it displays a valid OMB Control Number. The valid OMB control number for this information collection is OMB No. 0348-0046. Public reporting burden for this collection of information is estimated to average 30 minutes per response, including time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding the burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to the Office of Management and Budget, Paperwork Reduction Project (0348-0046), Washington, DC 20503.

Approved by OMB

Complete this form to disclose lobbying activities pursuant to 31 U.S.C. 1352

0348-0046

(See reverse for public burden disclosure)

1. Type of Federal Action: <input type="checkbox"/> a. Contract a. Grant b. Cooperative agreement c. Loan d. Loan guarantee e. Loan insurance		2. Status of Federal Action: <input type="checkbox"/> a. bid/offer/application b. initial award c. post-award		3. Report Type: <input type="checkbox"/> a. initial finding b. material change For Material Change Only year____ quarter ____ date of last report_____	
4. Name and Address of Reporting Entity: <input type="checkbox"/> Prime <input type="checkbox"/> Subawardee Tier _____, if known: Congressional District, if known:			5. If Reporting Entity in No. 4 is a Subawardee, Enter Name and Address of Prime: Congressional District, if known:		
6. Federal Department/Agency:			7. Federal Program Name/Description: CFDA Number, if applicable: _____		
8. Federal Action Number, if known:			9. Award Amount, if known: \$		
10. a. Name and Address of Lobbying Entity (if individual, last name, first name, M) (attach Continuation Sheet(s) SF-LLL4, if necessary)			b. Individuals Performing Services (including address if different from No. 10a) (last name, first name, MI): 		
11. Amount of Payment (check all that apply) \$ _____ <input type="checkbox"/> actual <input type="checkbox"/> planned			13. Type of Payment (check all that apply) <input type="checkbox"/> a. retainer <input type="checkbox"/> b. one-time fee <input type="checkbox"/> c. commission <input type="checkbox"/> d. contingent fee <input type="checkbox"/> e. deferral <input type="checkbox"/> f. other: specify: _____		
12. Form of Payment (check all that apply) <input type="checkbox"/> a, cash <input type="checkbox"/> b. in-kind: specify: nature _____ Value _____					
14. Brief Description of Services Performed or to be Performed and Date(s) of Service, Including officer(s), employee(s), or Member(s), contacted, for Payment indicated in item 11: (attach Continuation Sheet(s) SF-LLLA, if necessary)					
15. Continuation Sheet(s) SF-LLLA attached: <input type="checkbox"/> Yes <input type="checkbox"/> No					
16. Information requested through this for misauthorized by title 31 U.S.C. section 1352. This disclosure of lobbying activities is a material representation of fact upon which reliance was placed by the tier above when this transaction was made or entered into. This disclosure is required pursuant to 31 U.S.C. 1352. This information will be reported to the Congress semi-annually and will be available for public inspection. Any person who fails to file the required disclosure shall be subject to a civil penalty of not less than \$10,000 and not more than \$100,000 for each such failure.			Signature: _____ Print Name: _____ Title: _____ Telephone No.: _____ Date: _____		
Federal Use Only:			Authorized for Local Reproduction Standard Form LLL (Rev. 7-07)		

DISCLOSURE OF LOBBYING ACTIVITIES Approved by
CONTINUATION SHEET

OMB0348-0046

Reporting Entity: _____ Page _____ of _____

Authorized for Local Reproduction
Standard Form - LLL-A